

# CLASS TEST

S.No. : 06 GH1\_ME\_D\_160919

Heat and Mass Transfer



## MADE EASY

India's Best Institute for IES, GATE & PSUs

Delhi | Noida | Bhopal | Hyderabad | Jaipur | Lucknow | Indore | Pune | Bhubaneswar | Kolkata | Patna

Web: [www.madeeasy.in](http://www.madeeasy.in) | E-mail: [info@madeeasy.in](mailto:info@madeeasy.in) | Ph: 011-45124612

# CLASS TEST 2019-2020

## MECHANICAL ENGINEERING

Date of Test : 16/09/2019

### ANSWER KEY > Heat and Mass Transfer

1. (a)	7. (b)	13. (c)	19. (b)	25. (b)
2. (d)	8. (c)	14. (b)	20. (a)	26. (a)
3. (c)	9. (b)	15. (c)	21. (b)	27. (b)
4. (b)	10. (b)	16. (a)	22. (d)	28. (a)
5. (a)	11. (a)	17. (b)	23. (a)	29. (b)
6. (a)	12. (d)	18. (c)	24. (c)	30. (a)

**DETAILED EXPLANATIONS**

1. (a)

$$NTU = \frac{UA}{C_{\min}} = \frac{1000 \times 5}{10000} = 0.5$$

$$\epsilon = 1 - \exp(-NTU)$$

$$= 1 - \exp(-0.5) = 0.39347$$

4. (b)

$$\lambda T = 2898 \mu\text{mK}$$

$$\lambda = \frac{2898}{T} = \frac{2898}{1000} = 2.898 \mu\text{m}$$

5. (a)

$$\eta_f = \frac{\sqrt{PhkA}(t_0 - t_a) \tanh(ml)}{hPl(t_0 - t_a)}$$

$$\epsilon_f = \frac{\sqrt{PhkA}(t_0 - t_a) \tanh(ml)}{hA_C(t_0 - t_a)}$$

$$\Rightarrow \epsilon_f = \eta_f \left( \frac{Pl}{A_C} \right) = \eta_f \left( \frac{\text{Surface area}}{\text{Cross-section area}} \right)$$

$$\therefore \epsilon_f = 0.7 \times \left[ \frac{\pi \times 1 \times 8}{\left( \frac{\pi \times 1^2}{4} \right)} \right] = 22.4$$

6. (a)

$$Nu_x = 0.035 Re_x^{0.8} Pr^{1/3}$$

$$\Rightarrow \frac{h_x x}{k} = 0.035 \left( \frac{Vx}{\nu} \right)^{0.8} Pr^{1/3}$$

$$\Rightarrow h_x \propto x^{-0.2}$$

$$\Rightarrow h_x = cx^{-0.2}$$

$$\frac{\bar{h}}{h_{x=L}} = \frac{1/L \int_{x=0}^L h_x dx}{h_{x=L}} = \frac{1/L \int_{x=0}^L cx^{-0.2} dx}{cL^{-0.2}}$$

$$= \frac{1/L \left[ x^{-0.2+1} \right]_0^L}{L^{-0.2} [-0.2+1]}$$

$$= \frac{1}{L} \times \frac{L^{0.8}}{0.8 \times L^{-0.2}} = \frac{1}{0.8} \times \frac{L^{0.8+0.2}}{L} = \frac{1}{0.8} = 1.25$$

7. (b)

As outlet temperature of cold fluid is more than outlet temperature of hot fluid, so it will be counterflow heat exchanger.

9. (b)

From energy balance,  $C_h \Delta T_h = C_c \Delta T_c$ 

$$\Rightarrow C_h(250 - 175) = C_c(170 - 30)$$

$$\frac{C_c}{C_h} = 0.5357 \approx 0.54$$

10. (b)

$$\text{Prandtl number, Pr} = \frac{\mu C_p}{k} = \frac{0.004 \times 2000}{1} = 8$$

$$\Rightarrow \frac{\delta}{\delta_{th}} = (\text{Pr})^{1/3}$$

$$\Rightarrow \delta_{th} = \frac{1}{2} = 0.5 \text{ mm}$$

11. (a)

From energy balance of copper bar,

$$I^2 R = h(\pi d l) \Delta t$$

$$\Rightarrow I \propto \sqrt{h} \quad \dots(1)$$

Now, from given relation

$$\Rightarrow h \propto \sqrt{\text{Re}} \propto \sqrt{V} \quad \dots(2)$$

where V is velocity of air.

From (1) and (2) we get,

$$\Rightarrow I \propto (V)^{1/4}$$

$$\begin{aligned} \text{Now, } I' &= I \left( \frac{V'}{V} \right)^{1/4} = I \times 3^{1/4} \\ &= 100 \times 3^{1/4} = 131.6 \text{ Amp.} \end{aligned}$$

12. (d)

$$Q = \dot{m}_h C_h (T_{h1} - T_{h2}) = \dot{m}_c C_c (T_{c2} - T_{c1})$$

$$Q = 0.02 \times 1880(350 - 300) = 0.015 \times 4175 \times (T_{c2} - 280)$$

$$1880 = 0.015 \times 4175 \times (T_{c2} - 280)$$

$$\text{or } T_{c2} = 310 \text{ K}$$

$$\text{LMTD} = \frac{40 - 20}{\log_e \left( \frac{40}{20} \right)} = 28.85 \text{ K}$$

$$Q = U_o A_o (\text{LMTD}) = U_o (\pi d_o L) (\text{LMTD})$$

$$\Rightarrow L = \frac{1880}{640 \times \pi \times 0.02 \times 28.85} = 1.62 \text{ m}$$

13. (c)

Heat generated due to current flow,

$$= I^2 R$$

$$= 1000^2 \times \frac{0.08}{1000} \text{ W/m} = 80 \text{ W/m}$$

Heat dissipated to surrounding,

$$= hA\Delta t$$

$$= 15 \times (\pi \times 0.01)(t_w - 40) \text{ W/m}$$

where  $t_w$  is wire temperature.

Under steady condition,

$$\Rightarrow 80 = 15 (\pi \times 0.01)(t_w - 40)$$

$$\Rightarrow t_w = 209.77^\circ\text{C}$$

**14. (b)**

Given:  $\mu = 1.967 \times 10^{-5} \text{ kg/ms}$ ,  $k = 0.02792 \text{ W/mK}$ ,  $Pr = 0.713$ ,  $m = 75 \text{ kg/hr}$

$$\text{Reynolds number, } Re = \frac{\rho Vd}{\mu} = \frac{md}{A\mu}$$

$$\Rightarrow Re = \frac{4m}{\pi d\mu} = \frac{4 \left[ \frac{75}{3600} \right]}{\pi \times 0.1 \times 1.967 \times 10^{-5}}$$

$$\Rightarrow Re = 13485$$

$\therefore$  Flow is turbulent

$$\therefore Nu = 0.023 [13485]^{0.8} (0.713)^{0.4} = 40.44$$

$$\text{Now, } h = Nu \times \frac{k}{d}$$

$$= 40.44 \times \frac{0.02792}{0.1}$$

$$\Rightarrow h = 11.290 \text{ W/m}^2 \text{ K}$$

**15. (c)**

Given:  $\theta_m = 60^\circ\text{C}$ ,  $m_h = 10 \text{ kg/s}$ ,  $h_{fg} = 500 \text{ kJ/kg}$

$$\text{Now, } m_h h_{fg} = UA\theta_m$$

$$\Rightarrow m_h h_{fg} = U(\pi d_o l \times n \times p)\theta_m$$

$$\Rightarrow 10 \times 500 \times 10^3 = 500[\pi \times 0.025 \times 5 \times n \times p] \times 60$$

$$\Rightarrow n \times p = 424.41$$

Let the mass flow rate of cold fluid in each pass and number of tubes in each pass be  $m_c$  and  $n$  respectively


$$\Rightarrow m_c = \left[ \frac{\pi}{4} d^2 \times v \times \rho \right] n$$

$$\Rightarrow 60 = \frac{\pi}{4} \times (0.025)^2 \times 3 \times 1000 \times n$$

$$\Rightarrow n = 40.7$$

$$\text{Number of passes} = \frac{424.41}{41} = 10.35 \approx 11$$

16. (a)

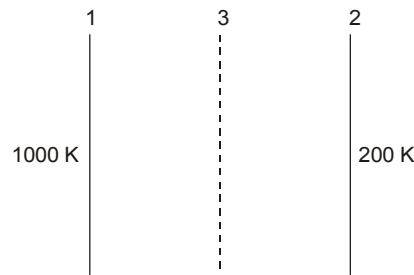

Heat flow from plate 1 to sheet per unit Area,

$$\Rightarrow Q_{13} = (F_g)_{13} \sigma (T_1^4 - T_3^4)$$

$$\text{Now } F_{g13} = \frac{1}{\frac{1}{\epsilon_1} + \frac{1}{\epsilon_3} - 1} = \frac{1}{\frac{1}{0.6} + \frac{1}{0.2} - 1} = 0.1765$$

$$\Rightarrow Q_{13} = 0.1765 \sigma (1000^4 - T_3^4) \quad \dots(1)$$

Heat flow per unit area from sheet to plate 2,

$$\Rightarrow Q_{32} = (F_g)_{32} \sigma (T_3^4 - T_2^4)$$

$$\Rightarrow F_{g32} = \frac{1}{\frac{1}{\epsilon_3''} + 1 - 1} = 0.1 \quad (\epsilon_3'' = 0.1)$$

$$\frac{1}{\frac{1}{0.1} + 1 - 1} = \frac{1}{10 + 1 - 1} = \frac{1}{10} = 0.1$$

$$\Rightarrow Q_{32} = 0.1 \sigma [T_3^4 - 200^4] \quad \dots(2)$$

Equating equation (1) and (2) we get,

$$\Rightarrow 0.1765 \sigma [1000^4 - T_3^4] = 0.1 \sigma [T_3^4 - 200^4]$$

$$\Rightarrow T_3 = 894 \text{ K}$$

17. (b)

$$m = \sqrt{\frac{hP}{kA_c}} = \sqrt{\frac{h \times \pi d}{K \times \frac{\pi d^2}{4}}} = \sqrt{\frac{4h}{Kd}}$$

$$= \sqrt{\frac{4 \times 60}{30 \times 0.02}} = 20 \text{ m}^{-1}$$

$$\text{Now, } \frac{\theta}{\theta_0} = \frac{t - t_a}{t_0 - t_a} = \frac{\cosh hm[l - x]}{\cosh hm l}$$

$$x = 0.03; l = 0.1, t_a = 300 \text{ K}, t_0 = 400 \text{ K}$$

$$\Rightarrow \frac{t - 300}{400 - 300} = \frac{\cosh[20(0.1 - 0.03)]}{\cosh(20 \times 0.1)}$$

$$\Rightarrow \frac{t - 300}{100} = \frac{\cosh 1.4}{\cosh 2} = 0.5717$$

$$\Rightarrow t = 357.17 \text{ K}$$

18. (c)

Heat lost with existing insulation,

$$Q_1 = \frac{2\pi kl(t_1 - t_2)}{\log_e \frac{r_2}{r_1}}$$

Heat lost with additional insulation

$$Q_2 = \frac{2\pi kl(t_1 - t_2)}{\log_e \frac{r_2 + x}{r_1}}$$

Given  $Q_2 = \frac{Q_1}{5}$

$$\Rightarrow \frac{2\pi k [t_1 - t_2]}{\log_e \left[ \frac{r_2 + x}{r_1} \right]} = \frac{1}{5} \frac{2\pi k l (t_1 - t_2)}{\log_e \left( \frac{r_2}{r_1} \right)}$$

$$\Rightarrow \frac{r_2 + x}{r_1} = \left( \frac{r_2}{r_1} \right)^5$$

Given  $r_1 = \frac{6 \text{ cm}}{2} = 3 \text{ cm}$

$$r_2 = 3 + 1 = 4 \text{ cm}$$

$$\Rightarrow \frac{4 + x}{3} = \left( \frac{4}{3} \right)^5$$

$$\Rightarrow x = 8.64 \text{ cm}$$

19. (b)

Resistance of wire,  $R = 0.1 \Omega$  per cm length  
 $= 10 \Omega$  per m length

Heat generated,  $Q = I^2 R$   
 $= 5^2 \times 10 = 250 \text{ W/m}$

$$Q = \frac{2\pi kl(t_1 - t_2)}{\log_e \left( \frac{r_2}{r_1} \right)}$$

$$\frac{Q}{l} = 250 = \frac{2\pi \times k \times 140}{\ln \left( \frac{1}{0.05} \right)} = 0.8514 \text{ W/m-K}$$

20. (a)

$$k_m = 0.065 \left( 1 + 15 \times 10^{-4} \left( \frac{300 + 60}{2} \right) \right)$$

$$= 0.08255 \text{ W/m-deg}$$

The heat flow through the cylinder with radii  $r_1$  and  $r_2$  is given by,

$$Q = \frac{2\pi kl(t_2 - t_1)}{\ln \left( \frac{r_2}{r_1} \right)} = \frac{2\pi \times 0.08255 \times 2 \times 240}{\ln \left( \frac{20.5}{12.5} \right)}$$

$$= 503.268 \text{ W}$$

21. (b)

Taking

$$L = 1 \text{ m}$$

$$A_1 = 2\pi r_1 L = 2\pi \times 0.025 \times 1 = 0.157 \text{ m}^2$$

$$A_3 = 2\pi r_3 L = 2\pi \times 0.0575 \times 1 = 0.361 \text{ m}^2$$

$$R_{\text{conv}, 1} = \frac{1}{h_1 A_1} = \frac{1}{60 \times 0.157} = 0.106^\circ\text{C/W}$$

$$R_{\text{pipe}} = \frac{\ln(r_2 / r_1)}{2\pi k_1 L} = \frac{\ln(2.75 / 2.5)}{2\pi \times 80 \times 1} = 1.8961 \times 10^{-4}^\circ\text{C/W}$$

$$R_{\text{insulation}} = \frac{\ln(r_3 / r_2)}{2\pi k_2 L} = \frac{\ln(5.75 / 2.75)}{2\pi \times 0.05 \times 1} = 2.35^\circ\text{C/W}$$

$$R_{\text{conv}, 2} = \frac{1}{h_2 A_3} = \frac{1}{18 \times 0.361} = 0.154^\circ\text{C/W}$$

$$R_{\text{total}} = 2.61^\circ\text{C/W}$$

⇒

$$Q = \frac{T_{\infty 1} - T_{\infty 2}}{R_{\text{total}}} = \frac{320 - 5}{2.61} = 120.69 \text{ W}$$

22. (d)

$$Gr_L = \frac{g\beta(T_w - T_\infty)L^3}{\nu^2} = \frac{9.81 \times 3 \times 10^{-4}(60 - 20) \times (0.2)^3}{(0.658 \times 10^{-6})^2}$$

$$= 21.75 \times 10^8$$

$$Ra_L = Gr_L \cdot Pr = 21.75 \times 10^8 \times 4.34$$

$$= 9.44 \times 10^9$$

∴ The flow is turbulent

$$\Rightarrow \frac{\bar{h}L}{k} = 0.1(Gr Pr)^{1/3}$$

$$\bar{h} = \frac{0.628}{0.2} \times 0.10 \times (9.44 \times 10^9)^{1/3}$$

$$= 663.62 \text{ W/m}^2\text{K}$$

$$\therefore \text{The rate of heat transfer} = \bar{h}A(T_w - T_\infty) = 663.62 \times 0.2 \times 0.2(60 - 20) \times 2$$

$$= 2123.58 \text{ W} = 2.123 \text{ kW}$$

23. (a)

Lumped parameter solution for transient conduction.

$$\frac{T - T_a}{T_i - T_a} = \exp\left[-\frac{hA}{\rho Vc} \tau\right]$$

$$\text{Now, } \frac{A}{V} = \frac{2\pi r(r+l)}{\pi r^2 l} = \frac{2(r+l)}{\pi l} = \frac{2 \times [5+25]}{5 \times 25} = 0.48 \text{ cm}^{-1}$$

$$\text{Now, } \frac{hA}{\rho Vc} = \frac{k}{\rho c} \times \frac{h}{k} \times \frac{A}{V} = \alpha \times \frac{h}{k} \times \frac{A}{V}$$

$$= (0.45 \times 10^{-5}) \times \frac{100}{25} \times (0.48 \times 100) = 8.64 \times 10^{-4}$$

$$\therefore \frac{1260 - 830}{1260 - 90} = \exp[-8.64 \times 10^{-4} \tau]$$

$$\Rightarrow \exp[8.64 \times 10^{-4} \tau] = \frac{1260 - 90}{1260 - 830} = 2.7209$$

$$\Rightarrow 8.64 \times 10^{-4} \tau = \log_e[2.7209]$$

$$\Rightarrow \tau = 1158.53 \text{ s}$$

$$\text{Required ingot velocity, } V = \frac{\text{furnace length}}{\text{Time}} = \frac{5}{1158.53} = 4.32 \times 10^{-3} \text{ m/s} = 4.32 \text{ mm/s}$$

24. (c)

For constant heat flux is

$$\frac{q}{A} = -k_1 \frac{(T_2 - T_1)}{\delta_1} = -k_2 \frac{(T_3 - T_2)}{\delta_2}$$

here  
and

$$\delta_1 = b, \delta_2 = 2b$$

$$k_1 = k; k_2 = 2k$$

$$\Rightarrow -k \frac{(T - 327)}{b} = -2k \frac{(27 - T)}{2b}$$

$$\Rightarrow 2T = 354^\circ\text{C}$$

$$T = 177^\circ\text{C}$$

25. (b)

Temperature distribution for the above condition is given by

$$\left[ \frac{T_o - T}{T_o - T_w} \right] = \left[ \frac{x}{L} \right]^2$$

Putting values

$$\Rightarrow \frac{200 - T}{200 - 50} = \left( \frac{0.5}{1} \right)^2$$

$$200 - T = \frac{150}{4}, T = 162.5^\circ\text{C}$$

26. (a)

- In dropwise condensation rate of heat transfer is higher as compared to film wise condensation.
- In film condensation the liquid condensate wets the solid surface, spreads out and forms continuous film over the entire surface. So in this rate of heat transfer is less than that in dropwise condensation.

27. (b)

$$C_{\text{gas}} = C_1 = m_g \times c_{pg} = 2 \times 1.25 = 2.5 \text{ kJ/K}$$

$$C_{\text{water}} = C_2 = 1.5 \times 4 = 6 \text{ kJ/K}$$

$$\Rightarrow \text{Effectiveness} = \frac{C_{\text{gas}}(300 - T_{ge})}{C_{\text{min}}(300 - 40)} = 0.6$$


$$\Rightarrow T_{ge} = 144^\circ\text{C}$$

28. (a)

- Snow behaves as a black body. So its absorptivity will be high. Absorptivity of snow is around 0.985.
- The absorptivity of grey surface is necessarily below unity, but it remains constant over the entire range of temperature and wavelength of incident radiation.



30. (a)

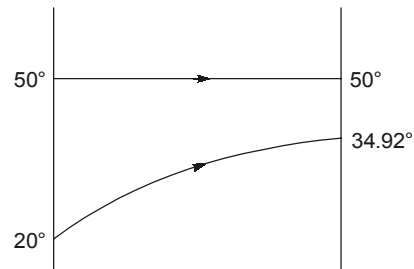

Given heat exchanger is a condenser,

$$C_h = C_{\max} = \infty$$

$$C_{\min} = C_c$$

$$\text{Effectiveness} = \frac{C_c [t_{c2} - t_{c1}]}{C_{\min} [t_{h1} - t_{c1}]}$$

$$= \frac{t_{c2} - t_{c1}}{t_{h1} - t_{c1}}$$

$$= \frac{35.95 - 20}{50 - 20} = 0.5317$$

$$[\because C_{\min.} = C_c]$$

Effectiveness of condenser.

$$\epsilon = 1 - \exp[-NTU] \quad (\text{Since } C = 0)$$

$$\Rightarrow 0.5317 = 1 - \exp[-NTU]$$

$$\Rightarrow \exp[-NTU] = 1 - 0.5317 = 0.4683$$

$$\Rightarrow -NTU = \log_e 0.4683 = -0.7586$$

$$\Rightarrow NTU = 0.7586$$

