



MADE EASY

India's Best Institute for IES, GATE & PSUs

ESE 2024 : Mains Test Series

UPSC ENGINEERING SERVICES EXAMINATION

Mechanical Engineering

Test-1 : Thermodynamics [All Topics]

Strength of Materials & Mechanics [All Topics]

Name :

Roll No

Test Centres	Student's Signature
Delhi <input checked="" type="checkbox"/> Bhopal <input type="checkbox"/> Jaipur <input type="checkbox"/> Pune <input type="checkbox"/> Kolkata <input type="checkbox"/> Hyderabad <input type="checkbox"/>	

Instructions for Candidates

- Do furnish the appropriate details in the answer sheet (viz. Name & Roll No).
- There are Eight questions divided in TWO sections.
- Candidate has to attempt FIVE questions in all in English only.
- Question no. 1 and 5 are compulsory and out of the remaining THREE are to be attempted choosing at least ONE question from each section.
- Use only black/blue pen.
- The space limit for every part of the question is specified in this Question Cum Answer Booklet. Candidate should write the answer in the space provided.
- Any page or portion of the page left blank in the Question Cum Answer Booklet must be clearly struck off.
- There are few rough work sheets at the end of this booklet. Strike off these pages after completion of the examination.

FOR OFFICE USE

Question No.	Marks Obtained
Section-A	
Q.1	55
Q.2	56
Q.3	—
Q.4	—
Section-B	
Q.5	38
Q.6	40
Q.7	20
Q.8	—
Total Marks Obtained	209

Signature of Evaluator

[Handwritten Signature]

Cross Checked by

.....

IMPORTANT INSTRUCTIONS

CANDIDATES SHOULD READ THE UNDERMENTIONED INSTRUCTIONS CAREFULLY. VIOLATION OF ANY OF THE INSTRUCTIONS MAY LEAD TO PENALTY.

DONT'S

1. Do not write your name or registration number anywhere inside this Question-cum-Answer Booklet (QCAB).
2. Do not write anything other than the actual answers to the questions anywhere inside your QCAB.
3. Do not tear off any leaves from your QCAB, if you find any page missing do not fail to notify the supervisor/invigilator.
4. Do not leave behind your QCAB on your table unattended, it should be handed over to the **invigilator** after conclusion of the exam.

DO'S

1. Read the Instructions on the cover page and strictly follow them.
2. Write your registration number and other particulars, in the space provided on the cover of QCAB.
3. Write legibly and neatly.
4. For rough notes or calculation, the last two **blank pages** of this booklet should be used. The rough notes should be crossed through afterwards.
5. If you wish to cancel any work, draw your pen through it or write "Cancelled" across it, otherwise it may be evaluated.
6. Handover your QCAB personally to the **invigilator before leaving the examination hall**.


Remarks:-

- Presentation is very good
- Read instructions properly before the attempt.
- Increase the attempt
- Accuracy is excellent. Keep it up.

Section : A

- Q.1 (a) The exhaust gas at 720°C from a boiler is used to heat water. The rate of gas flow is 1450 kg/min and the rate of water flow is 2000 kg/min . The water enters the heat exchanger at 42°C and the gases leave the exchanger at 160°C . Assume that the mean specific heat of gas and water are 1.088 kJ/kgK and 4.27 kJ/kgK respectively.

The atmospheric temperature is 27°C . Determine the loss of available energy resulting from heat transfer.

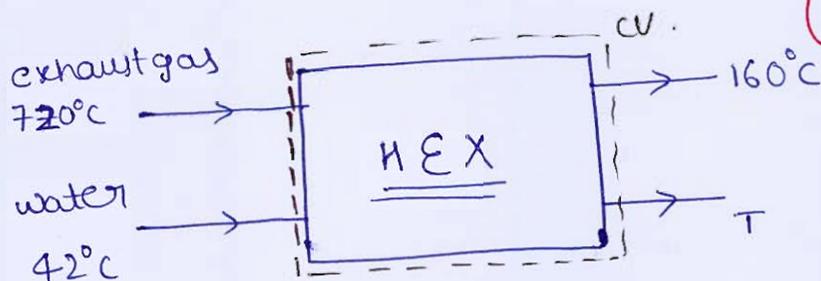

12

[12 marks]

$$\dot{m}_g = 1450 \frac{\text{kg}}{\text{min}}$$

$$\dot{m}_w = 2000 \frac{\text{kg}}{\text{min}}$$

$$C_g = 1.088 \frac{\text{kJ}}{\text{kgK}}$$

$$C_w = 4.27 \frac{\text{kJ}}{\text{kgK}}$$

$$T_0 = 27^{\circ}\text{C}$$

from 1st law of thermodynamics (Energy conservation)

$$\dot{m}_g C_g (\Delta T)_g = \dot{m}_w C_w (\Delta T)_w$$

$$1450 \times 1.088 \times (720 - 160) = 2000 \times 4.27 (T - 42)$$

$$T = 145.45^{\circ}\text{C}$$

$$(\Delta S)_{\text{univ}} = \Delta S_{\text{system}} + \Delta S_{\text{surroundings}}$$

$$= (\Delta S)_g + (\Delta S)_w + \cancel{\Delta S_{\text{surroundings}}} \rightarrow 0 \text{ (assuming no interaction with surroundings)}$$

$$(\Delta S)_g = \frac{1450 \text{ kg}}{60 \text{ s}} \times 1.088 \times \ln \left(\frac{273 + 160}{273 + 720} \right) = m C \ln \left(\frac{T_2}{T_1} \right)$$

$$(\Delta S)_g = -21.823 \frac{\text{kJ}}{\text{K}}$$

$$(\Delta S)_w = \frac{2000}{60} \times 4.27 \times \ln \left(\frac{273 + 145.45}{273 + 42} \right) = m C \ln \left(\frac{T_2}{T_1} \right)$$


$$(\Delta S)_w = 40.42 \frac{\text{kJ}}{\text{K}}$$

$$(\Delta S)_{\text{univ}} = (\Delta S)_w + (\Delta S)_g = 18.597 \frac{\text{kJ}}{\text{K}}$$

$$\begin{aligned} \text{Loss of available Energy (A.E)} &= T_0 S_{\text{gen}} \\ &= T_0 (\Delta S)_{\text{univ}} \\ &= 300\text{K} \left(18.597 \frac{\text{kJ}}{\text{K}} \right) \end{aligned}$$

$$\text{Loss of A.E} = 5579.249 \text{ kW}$$

- Q.1 (b) A household refrigerator maintains a space at a temperature of -5°C . Every time the door is opened, warm material is placed inside, introducing an average 500 kJ of heat, but making only a small change in temperature of the refrigerator. The door is opened 30 times a day and the refrigerator operates at 25% of ideal COP. The cost of work is ₹2.5 per kWh. What is the yearly bill of this refrigerator? The atmospheric temperature is at 30°C .

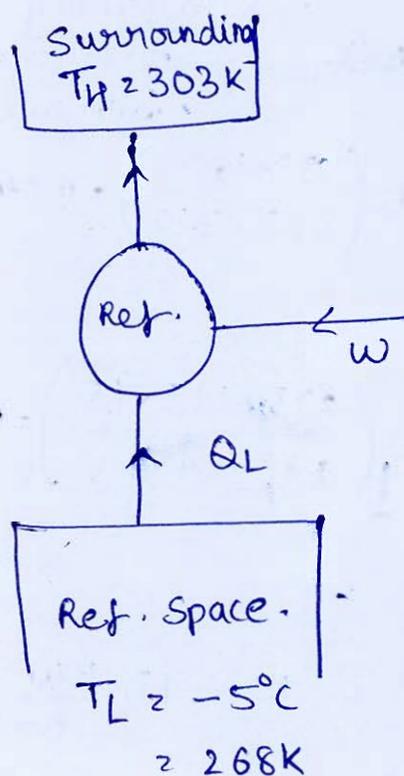

Given,

$$(\text{COP})_{\text{actual}} = 0.25 \times (\text{COP})_{\text{ideal}}$$

$$\begin{aligned} (\text{COP})_{\text{actual}} &= 0.25 \times \frac{T_L}{T_H - T_L} \\ &= 0.25 \times \frac{268}{303 - 268} \end{aligned}$$

$$(\text{COP})_{\text{actual}} = 1.914 = \frac{Q_L}{w}$$

$$\text{Heat introduced per day} = 500 \text{ kJ} \times 30 \text{ (times/day)}$$

$$= 15000 \text{ kJ}$$

$$Q_L \text{ for entire year} = 15000 \times 365$$

$$= 5475000 \text{ kJ}$$

$$Q_L = 1520.83 \text{ kW} \cdot \text{hr}$$

$$W = \frac{Q_L}{(\text{COP})_{\text{actual}}} = \frac{1520.83 \text{ kWh}}{1.914}$$

$$W = 794.583 \text{ kWh}$$

$$\text{Yearly bill of refrigerator} = W \times \text{cost}$$

$$= 794.583 \text{ (kWh)} \times 2.5 \frac{\text{Rs}}{\text{kWh}}$$

$$\text{Yearly bill} = 1986.459 \text{ ₹}$$

Q.1 (c) A cylinder contains 0.15 m^3 of air at 1 bar and 80°C . It is compressed to 0.02 m^3 , during a polytropic process the final pressure being 12 bar. Calculate the increase in internal energy and heat transferred during compression.

$$P_1 = 1 \text{ bar} = 100 \text{ kPa}$$

$$V_1 = 0.15 \text{ m}^3$$

$$T_1 = 353 \text{ K}$$

$$P_2 = 12 \text{ bar} = 1200 \text{ kPa}$$

$$V_2 = 0.02 \text{ m}^3$$

$$T_2 =$$

[12 marks]

Assumption:-

1. Assuming air to be an ideal gas.

Let n be the polytropic index

$$P_1 V_1^n = P_2 V_2^n$$

$$1 (0.15)^n = 12 (0.02)^n$$

$$\left(\frac{0.15}{0.02}\right)^n = 12$$

$$n \ln\left(\frac{0.15}{0.02}\right) = \ln(12)$$

$$n = 1.23326$$

$$\frac{P_1 V_1}{T_1} = \frac{P_2 V_2}{T_2} \Rightarrow \frac{1 \times 0.15}{353} = \frac{12 \times 0.02}{T_2}$$

$$PV = nRT$$

$$T_2 = 564.8 \text{ K}$$

$$\Delta U = n C_V (T_2 - T_1) = \left(\frac{P_1 V_1}{R T_1} \right) C_V (T_2 - T_1)$$

$$= \frac{100 \times 0.15}{0.287 \times 353} \times 0.718 \times (564.8 - 353)$$

change in internal Energy $\Delta U = 22.5157 \text{ KJ}$ \rightarrow ①

$$W_{12} = \frac{P_1 V_1 - P_2 V_2}{n-1} = \frac{nR (T_1 - T_2)}{n-1}$$

$$= \frac{\left(\frac{100 \times 0.15}{0.287 \times 353} \right) \times 0.287 \times (353 - 564.8)}{1.233 - 1}$$

$W_{12} = -38.6266 \text{ KJ}$

From 1st law of Thermodynamics for a closed system


$$Q_{12} = \Delta U + W_{12}$$

$Q_{12} = -16.1109 \text{ KJ}$ \rightarrow ②

- Q.1 (d) Sketch a P-T phase diagram for water and indicate the solid, liquid and vapour regions on it. Explain how this diagram differs from the phase diagram of other substances.

[12 marks]


P-T diagram for water.

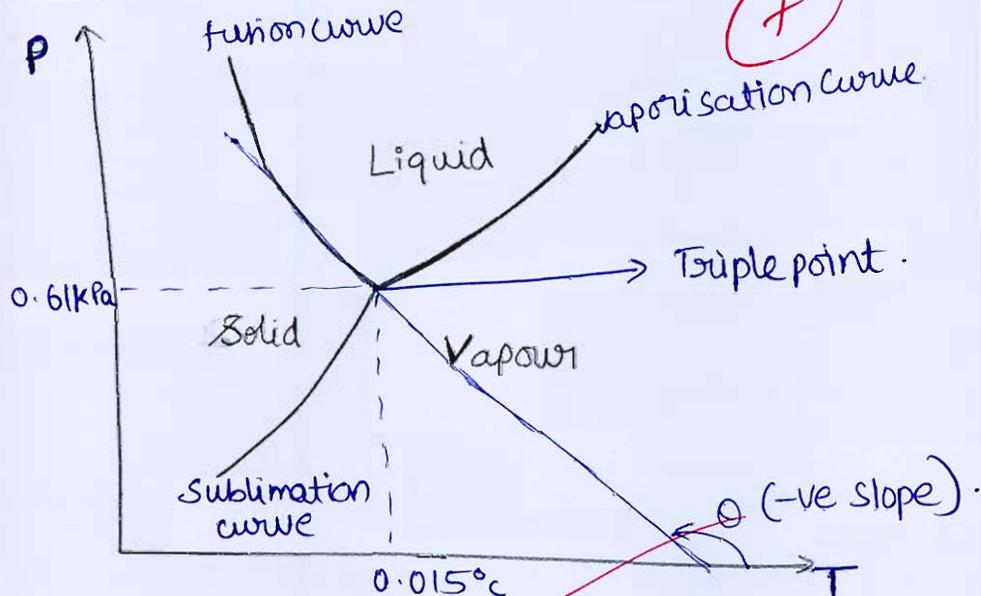


$$\left(\frac{\partial P}{\partial T}\right)_{\text{fusion curve}} = -ve \text{ for water.}$$

where as for other substances $\left(\frac{\partial P}{\partial T}\right)_{\text{fusion}} > 0$


Phase diagram for other substances. (P-T).

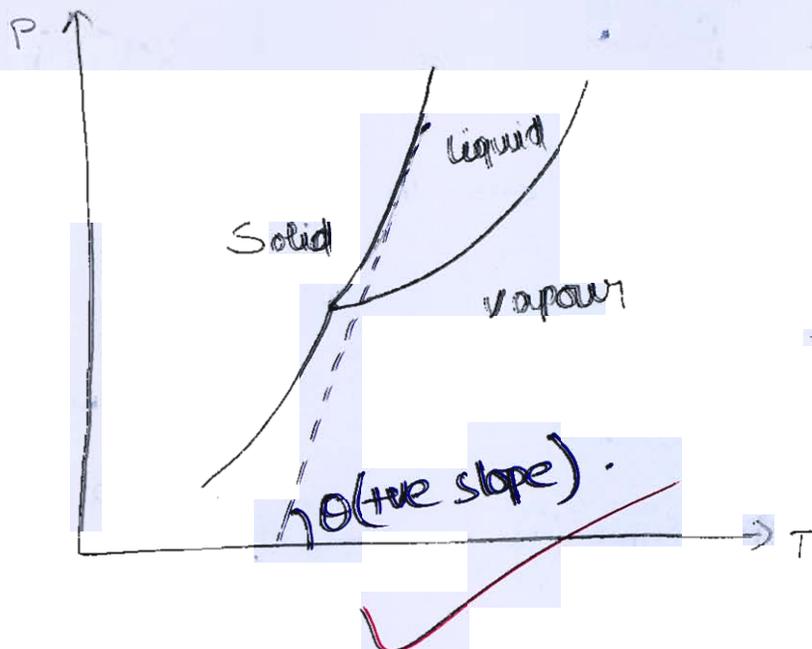

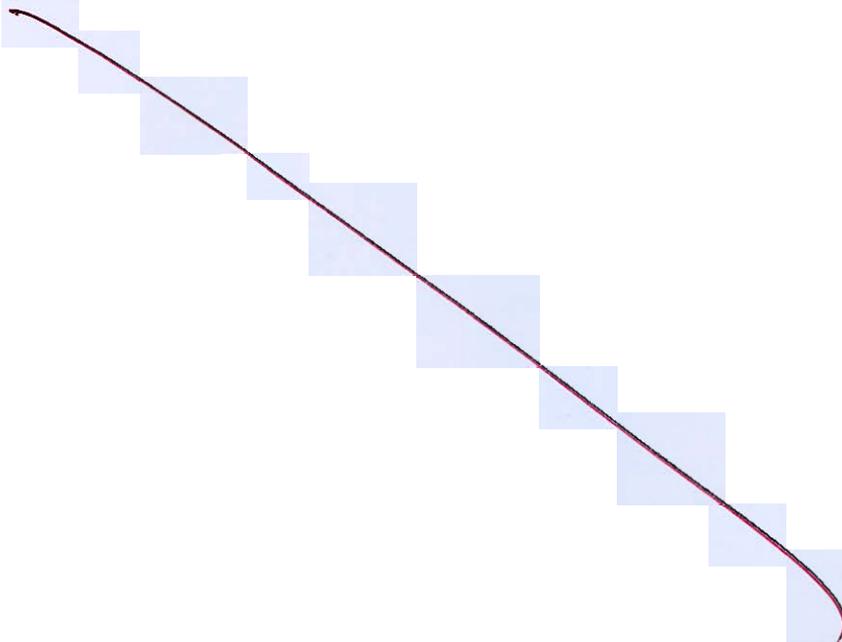

Q.1 (e) Two identical bodies of same heat capacity are at the same initial temperature T_1 . A reversible refrigerator operates between these two bodies, until one body is cooled to the temperature T_2 . If the bodies are at constant temperatures and do not undergo any change of phase, prove that the minimum amount of work needed by refrigerator is

$$W_{in} = C_p \left[\frac{T_1^2}{T_2} + T_2 - 2T_1 \right]$$

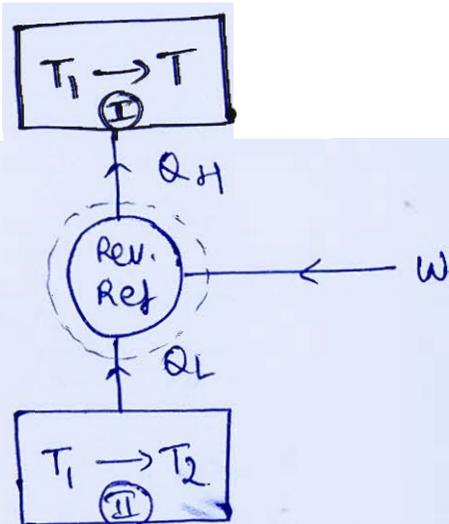

$$W = Q_H - Q_L$$

12

12 marks]

Let C_p be heat capacity of each body

* for work input to be minimum, the refrigerator should work reversibly.
i.e $(\Delta S)_{univ} = 0$

$$(\Delta S)_{\text{univ}} = (\Delta S)_{\text{I}} + (\Delta S)_{\text{II}} + (\Delta S)_{\text{Ref}} + (\Delta S)_{\text{Surroundings}}$$

$$(\Delta S)_{\text{univ}} = C_p \ln\left(\frac{T}{T_1}\right) + C_p \ln\left(\frac{T_2}{T_1}\right) = 0$$

(cyclic) (No interaction with surroundings)

$$T T_2 = T_1^2$$

$$T = \frac{T_1^2}{T_2}$$

1st law:- $W_{\text{in}} = Q_H - Q_L$


$$= C_p (T - T_1) - C_p (T_1 - T_2)$$

$$= C_p \left(\frac{T_1^2}{T_2} - 2T_1 + T_2 \right)$$

$$W_{\text{in}} = C_p \left[\frac{T_1^2}{T_2} + T_2 - 2T_1 \right]$$

→ minimum work input required.

- Q.2 (a) A tank containing 8 kg of methane at 1.5 bar and 27°C is connected to another tank containing 5 kg of CO₂ at 4 bar and 60°C through a valve. The valve is opened and the gases mix adiabatically. Determine the final pressure and temperature of the mixture and the irreversibility of the process, when environment temperature is 27°C. Given constant pressure specific heat of methane = 2.1 kJ/kgK and that of CO₂ = 0.85 kJ/kgK. Treat both the constituents as ideal gas.

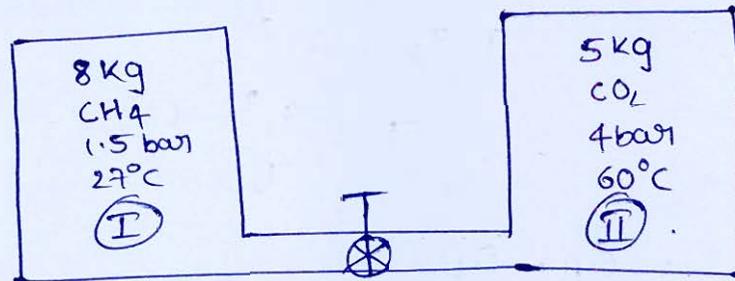

[20 marks]

19

for methane,

$$C_p = 2.1 \text{ kJ/kg}\cdot\text{K}$$

$$R = \frac{8.314}{16} \frac{\text{kJ}}{\text{kg}\cdot\text{K}}$$

$$R = 0.52 \frac{\text{kJ}}{\text{kg}\cdot\text{K}}$$

$$C_v = 1.58 \frac{\text{kJ}}{\text{kg}\cdot\text{K}}$$

$$PV = mRT$$

$$1.5 \times 10^2 \times V_I = 8 \times 0.52 \times 300$$

$$V_I = 8.32 \text{ m}^3$$

$$4 \times 10^2 \times V_{II} = 5 \times 0.189 \times 333$$

$$V_{II} = 0.787 \text{ m}^3$$

for CO₂,

$$C_p = 0.85 \text{ kJ/kg}\cdot\text{K}$$

$$R = \frac{8.314}{44}$$

$$R = 0.1889$$

$$R = 0.189 \frac{\text{kJ}}{\text{kg}\cdot\text{K}}$$

$$C_v = 0.661 \frac{\text{kJ}}{\text{kg}\cdot\text{K}}$$

$$V_{\text{total}} = V_I + V_{II}$$

$$V_{\text{total}} = 9.107 \text{ m}^3$$

from 1st law,

$$Q_{12} = \Delta U + W_{12}$$

$$0 = 8(1.58)(T - 300)$$

$$+ 5(0.661)(T - 333)$$

$$\text{final temperature } T = 306.84 \text{ K}$$

$$\boxed{\text{final temp}^\circ \text{ of mixture} = 306.84 \text{ K}}$$

$$P (V_{\text{total}}) = n \bar{R} T$$

$$n = n_{\text{CH}_4} + n_{\text{CO}_2} = \frac{8}{16} + \frac{5}{44} \\ = 0.6136 \text{ kmol.}$$

$$P (9.107) = 0.6136 \times 8.314 \times 306.84$$

$$\boxed{P = 171.893 \text{ kPa}}$$

$$(\Delta S)_{\text{univ}} = (\Delta S)_{\text{CH}_4} + (\Delta S)_{\text{CO}_2} + (\Delta S)_{\text{surroundings}}^{\text{adiabatic}}$$

$$(\Delta S)_{\text{CH}_4} = m \left[c_v \ln \left(\frac{T_2}{T_1} \right) + R \ln \left(\frac{V_2}{V_1} \right) \right] \\ = 8 \left[1.58 \ln \left(\frac{306.84}{300} \right) + 0.52 \ln \left(\frac{9.107}{8.32} \right) \right]$$

$$\boxed{(\Delta S)_{\text{CH}_4} = 0.661 \frac{\text{kJ}}{\text{K}}}$$

$$(\Delta S)_{\text{CO}_2} = 5 \text{ kg} \left[c_v \ln \left(\frac{306.84}{333} \right) + \frac{0.661}{R} \ln \left(\frac{9.107}{0.787} \right) \right]$$

$$\boxed{(\Delta S)_{\text{CO}_2} = 2.043 \frac{\text{kJ}}{\text{K}}}$$

$$\boxed{(\Delta S)_{\text{univ}} = 2.7045 \frac{\text{kJ}}{\text{K}}}$$

$$\text{Irreversibility} = T_0 (\Delta S)_{\text{univ}}$$

$$= 300 \times 2.7045$$


$$\boxed{I = 811.35 \text{ kJ}}$$

[Faint, illegible handwritten text, possibly bleed-through from the reverse side of the page]

Q.2 (b) The steam enters at steam turbine at 4 MPa and 500°C at a rate of 8 kg/s and exits at 0.3 MPa and 170°C. The steam is losing heat to the surroundings at 100 kPa and 25°C at a rate of 400 kW. The changes in kinetic and potential energies are negligible. Calculate

- actual power output
- the reversible work
- second law efficiency
- the availability of steam at inlet conditions

[Refer steam table attached]

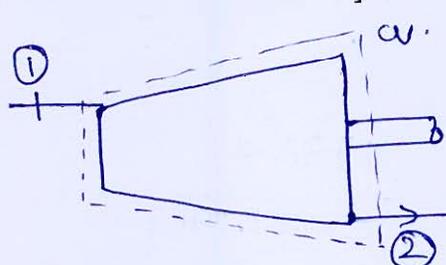

$$\dot{m} = 8 \text{ kg/s}$$

$$\dot{q} = -400 \text{ kW}$$

$$T_0 = 25^\circ\text{C}$$

state 1

$$4 \text{ MPa}, 500^\circ\text{C}$$

$$h_1 = 3446 \frac{\text{kJ}}{\text{kg}}$$

$$s_1 = 7.0922 \frac{\text{kJ}}{\text{kg}\cdot\text{K}}$$

[20 marks]

17

state 2

$$0.3 \text{ MPa}, 170^\circ\text{C}$$

$$h_2 = 2803.7 \frac{\text{kJ}}{\text{kg}}$$

$$s_2 = 7.1773 \frac{\text{kJ}}{\text{kg}\cdot\text{K}}$$

dead state

$$100 \text{ kPa}, 25^\circ\text{C}$$

$$h_0 = 419.17$$

$$s_0 = 1.3072$$

Applying SFEE,

$$\dot{m} h_1 + \dot{q} = \dot{m} h_2 + \dot{w}_{\text{cv}}$$

$$8 \times 3446 + (-400) = 8(2803.7) + \dot{w}_{\text{cv}}$$

(i) \leftarrow actual work output = 4738.4 kW

ϕ_1 = Available energy at state 1.

$$= (h_1 - h_0) - T_0 (s_1 - s_0)$$

$$= (3446 - 419.17) - 298(7.0922 - 1.3072)$$

$$= 1302.9 \frac{\text{kJ}}{\text{kg}}$$

$$\phi_2 = (h_2 - h_0) - T_0 (s_2 - s_0)$$

$$= (2803.7 - 419.17) - 298(7.1773 - 1.3072)$$

$$= 635.2402$$

$$\begin{aligned} \text{Reversible work} &= \dot{m}(\phi_1 - \phi_2) \\ &= \frac{8 \text{ kg}}{\text{s}} (1302.9 - 635.2402) \end{aligned}$$

(ii) \leftarrow Reversible work = 5341.2784 kW

second law efficiency $\eta_{II} = \frac{W_{\text{actual}}}{W_{\text{rev}}}$

$$= \frac{4738.4}{5341.2784} \times 100$$

(iii) \leftarrow $\eta_{II} = 88.713\%$


Availability of steam at inlet condition = $\dot{m}\phi_1$

$$= 8 \times 1302.9 \text{ kW}$$

(iv) \leftarrow Availability of steam at inlet condition = 10423.2 kW

- Q.2 (c) Three Carnot engines E_1 , E_2 and E_3 operate in series between two heat reservoirs, which are at temperatures of 1000 K and 500 K. Calculate the temperature of the intermediate reservoirs if the amount of work produced by these engines in the proportion of 7 : 5 : 4.

[20 marks]

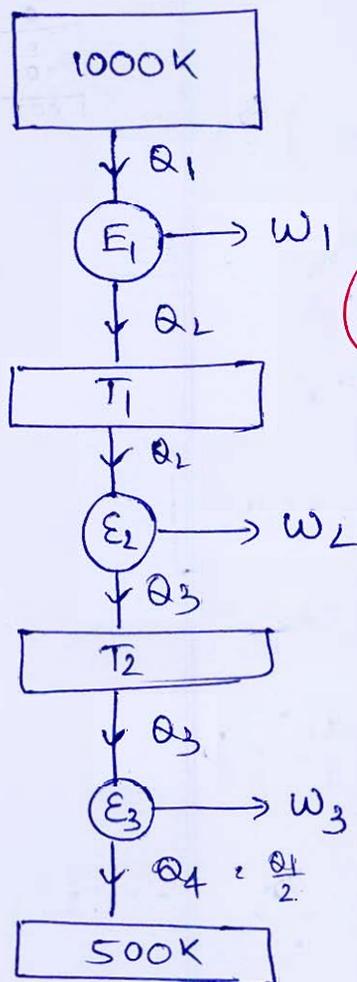

Let T_1, T_2 be temperatures of intermediate reservoirs.

$$w_1 : w_2 : w_3 = 7 : 5 : 4$$

$$w_1 = 7x \quad w_2 = 5x \quad w_3 = 4x$$

$$w_1 = \left(1 - \frac{T_1}{1000}\right) Q_1 \rightarrow (1)$$

$$Q_2 = \left(\frac{Q_1}{1000}\right) T_1 \rightarrow (2)$$

$$w_2 = \left(1 - \frac{T_2}{T_1}\right) Q_2 \rightarrow (3)$$

$$Q_3 = \frac{T_2}{T_1} Q_2$$

$$Q_3 = \frac{T_2}{T_1} \times \left(\frac{Q_1}{1000} T_1\right)$$

$$Q_3 = T_2 \left(\frac{Q_1}{1000}\right) \rightarrow (4)$$

$$w_3 = \left(1 - \frac{500}{T_2}\right) Q_3$$

$$w_3 = \left(1 - \frac{500}{T_2}\right) \left(T_2 \left(\frac{Q_1}{1000}\right)\right)$$

$$Q_4 = \frac{500}{T_2} Q_3 = \frac{500}{T_2} \times T_2 \left(\frac{Q_1}{1000}\right) = \frac{Q_1}{2}$$

considering E_1, E_2, E_3 , intermediate reservoirs as single engine b/w 1000K & 500K.

$$w_1 + w_2 + w_3 = \left(1 - \frac{500}{1000}\right) Q_1$$

$$7x + 5x + 4x = \frac{Q_1}{2}$$

$$16x = \frac{Q_1}{2}$$

$$x = \frac{Q_1}{32} \rightarrow (a)$$

From (1) and (a)

$$W_1 = 7x = \frac{7Q_1}{32} = \left(1 - \frac{T_1}{1000}\right) Q_1$$

$$\frac{T_1}{1000} = 1 - \frac{7}{32} = \frac{25}{32}$$

$$T_1 = \frac{25 \times 10^3}{32}$$

$$T_1 = 781.25 \text{ K}$$

From (3) and (a)

$$W_2 = 5x = \frac{5Q_1}{32} = \left(1 - \frac{T_2}{T_1}\right) Q_2$$


$$\frac{5Q_1}{32} = \left(1 - \frac{T_2}{781.25}\right) \frac{Q_1}{1000} (781.25)$$

$$\frac{5 \times 1000}{32 \times 781.25} = 1 - \frac{T_2}{781.25}$$

$$\frac{T_2}{781.25} = 1 - \frac{5000}{32 \times 781.25}$$


$$T_2 = 625 \text{ K}$$


\therefore Temperatures of intermediate reservoirs are 781.25 K and 625 K respectively.

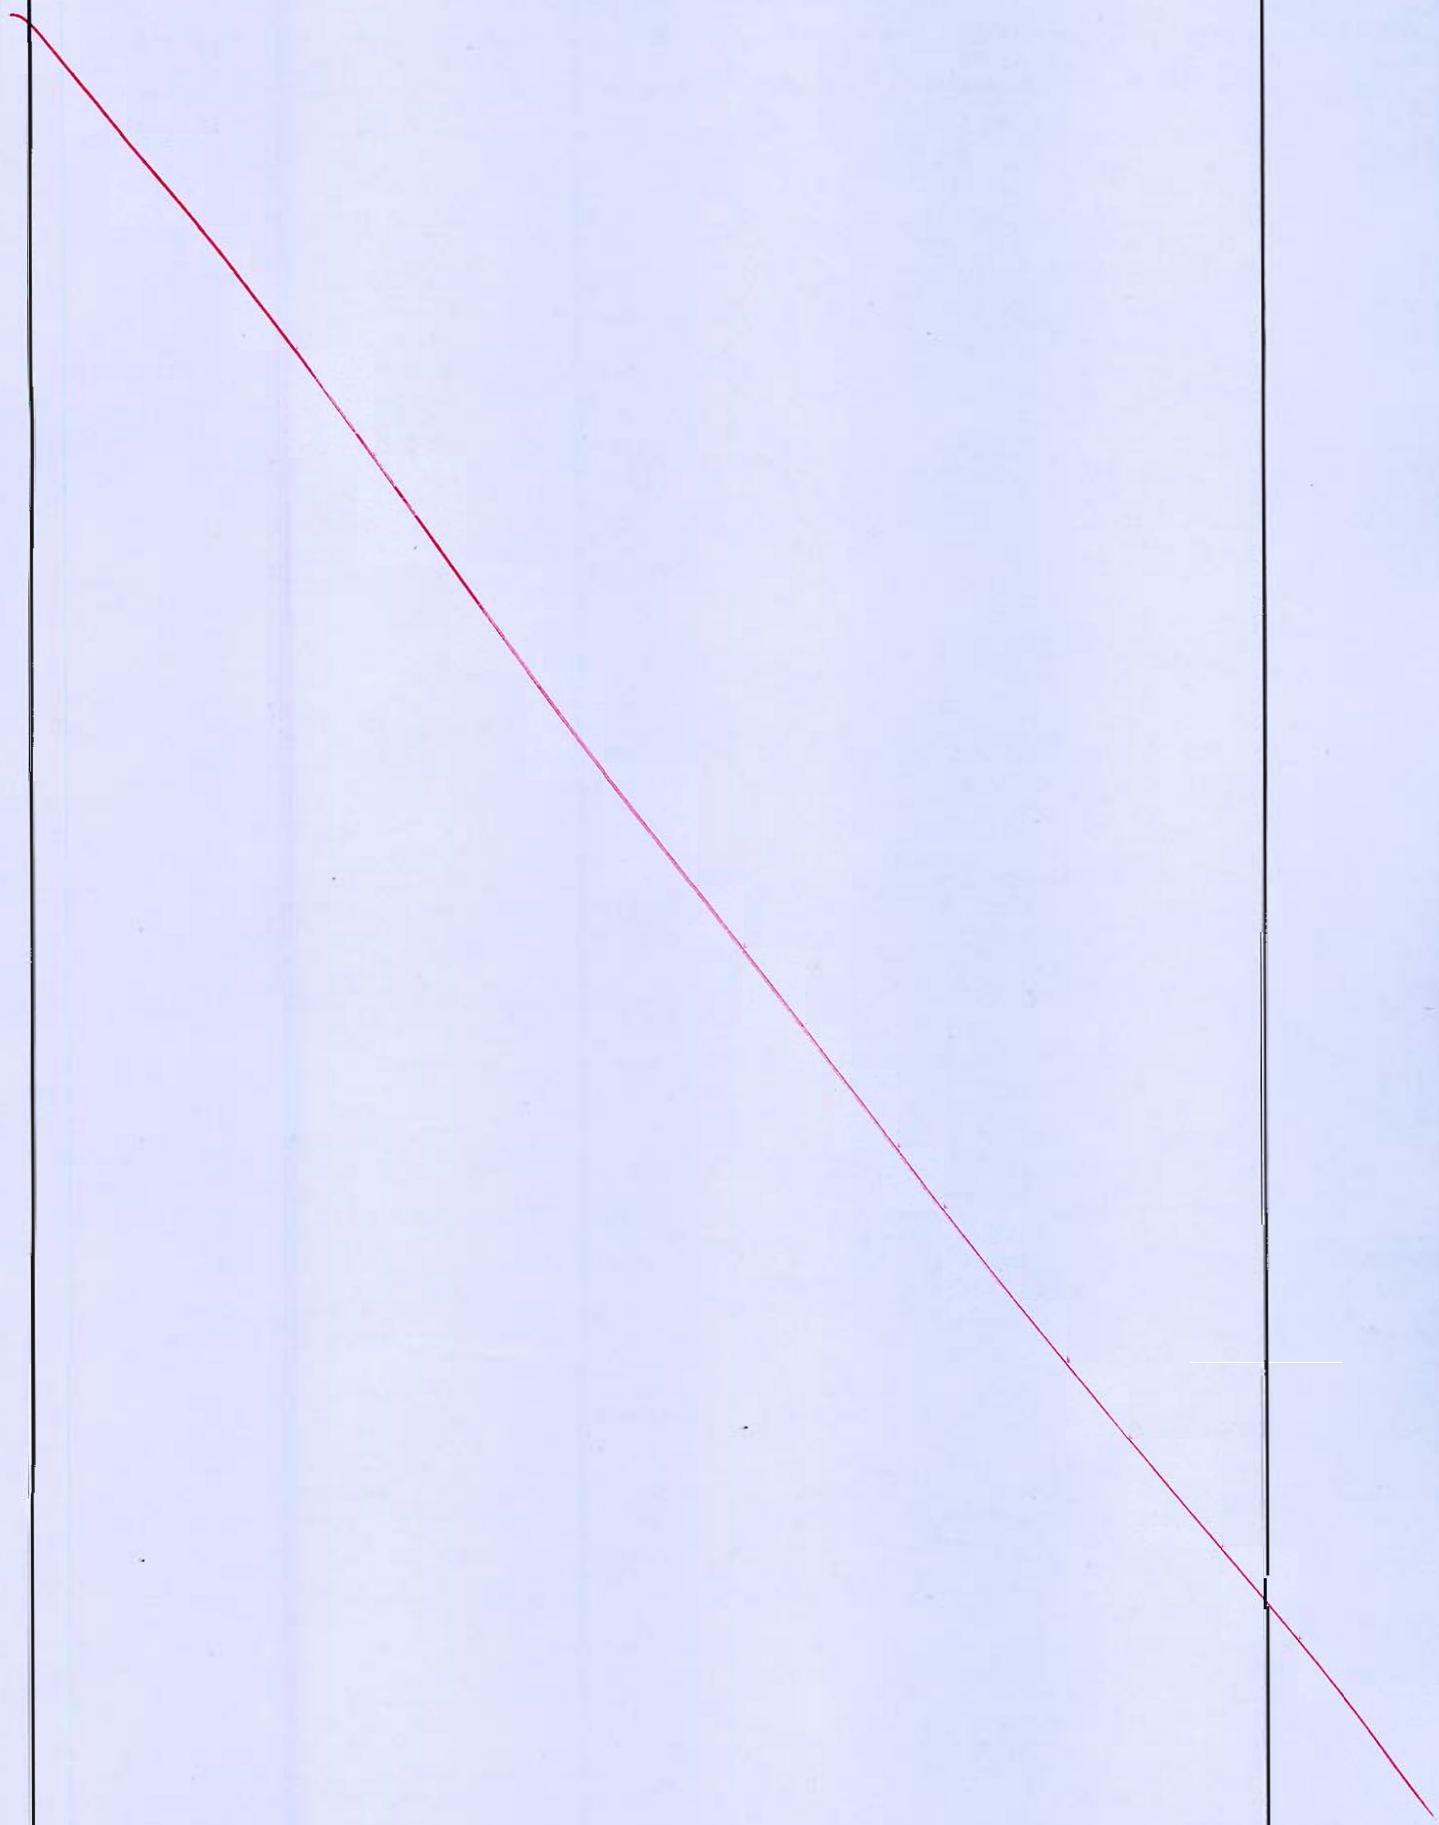

- Q.3 (a) In a process industry hot gases are delivered by different units. One unit delivers a gas A at 1 bar and 1200 K at a rate of 1.5 kg/sec while a second unit delivers a gas B at 1 bar and 900 K at a rate of 2 kg/sec. These hot gases are usually cooled to 300 K in heat exchangers. The ambient atmosphere is at 300 K. An engineer plans to use the hot gases as source and ambient atmosphere as sink to operate a heat engine and thus obtain some power. Calculate the maximum power that can be obtained if gases A and B are used as separate sources, and assume both the gases A and B are ideal with $\gamma = 1.4$, $R = 0.287 \text{ kJ/kgK}$, $c_p = 1.005 \text{ kJ/kgK}$, $c_v = 0.717 \text{ kJ/kgK}$.

[20 marks]

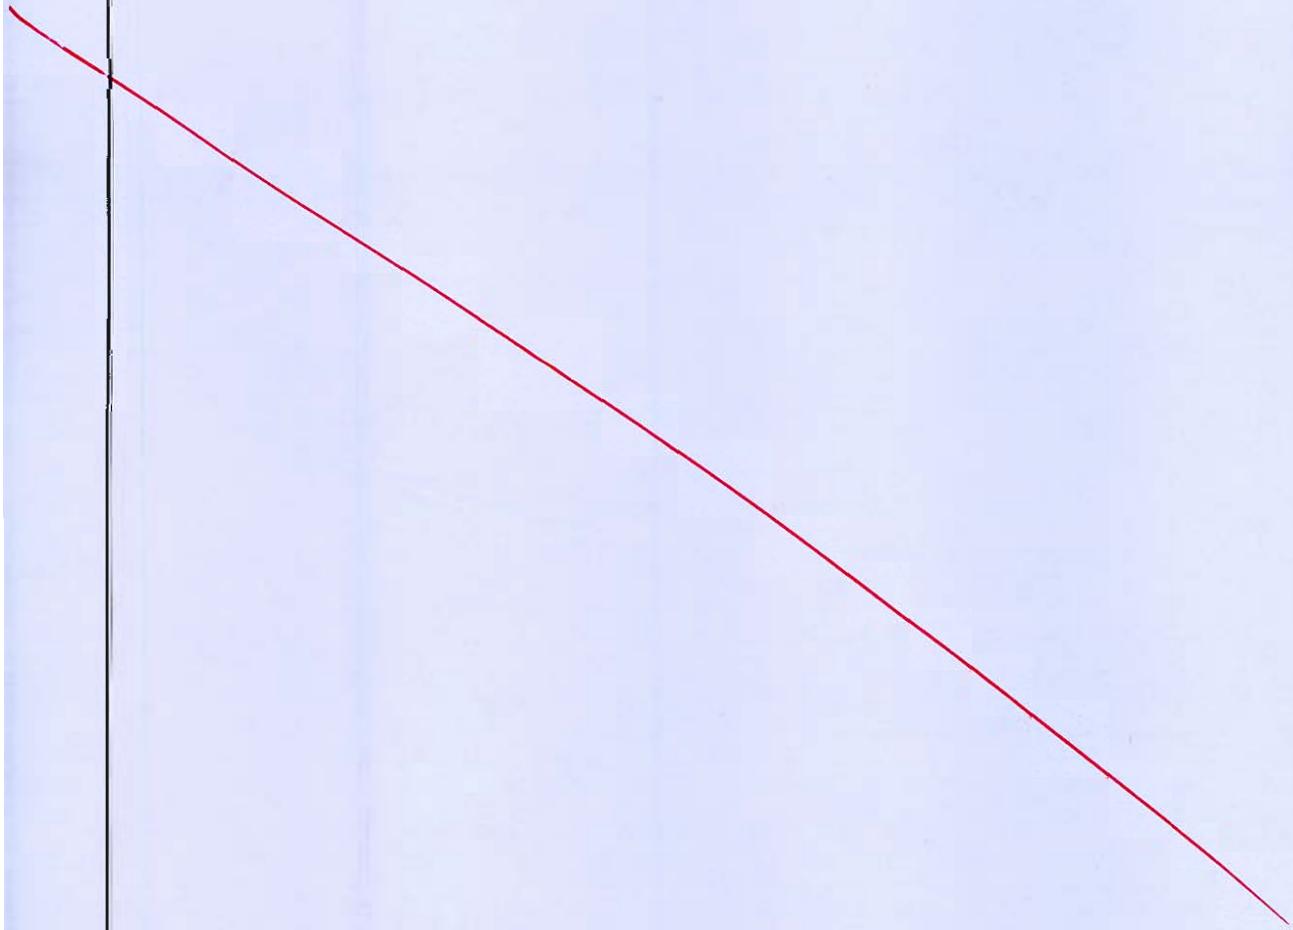

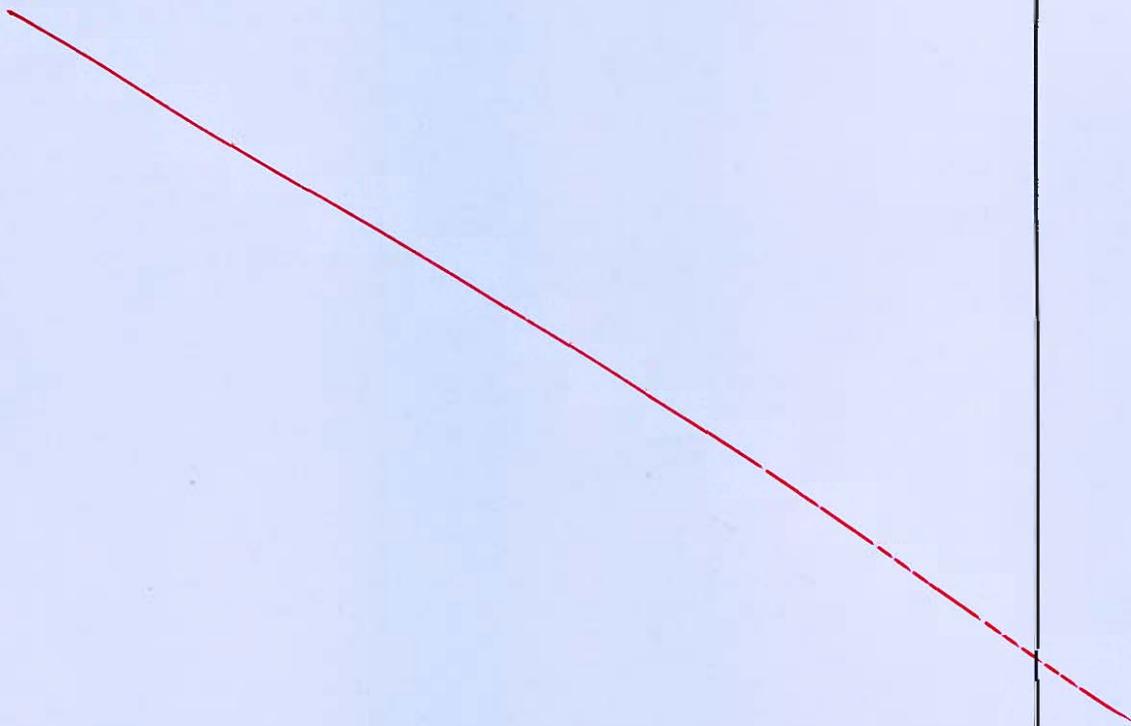


Q.3 (b) A cylinder containing 30 kg of saturated liquid water at 80°C has the piston restrained by a linear spring as shown in figure below.


The valve fitted near the bottom is opened to allow 10 kg of saturated liquid to flow out at 60°C. During this process, heat transfer from the surrounding is allowed and at the end of the process, the residual liquid is saturated at 40°C. The area of cross-section of the piston is 500 cm². Estimate the following:

- (i) Final state of water,
- (ii) The magnitude of heat transfer, and
- (ii) the spring constant

[Refer steam table attached]

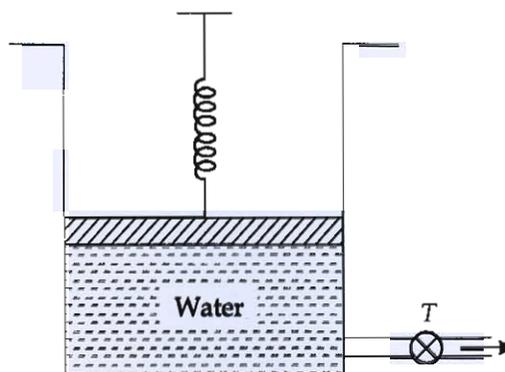

[20 marks]

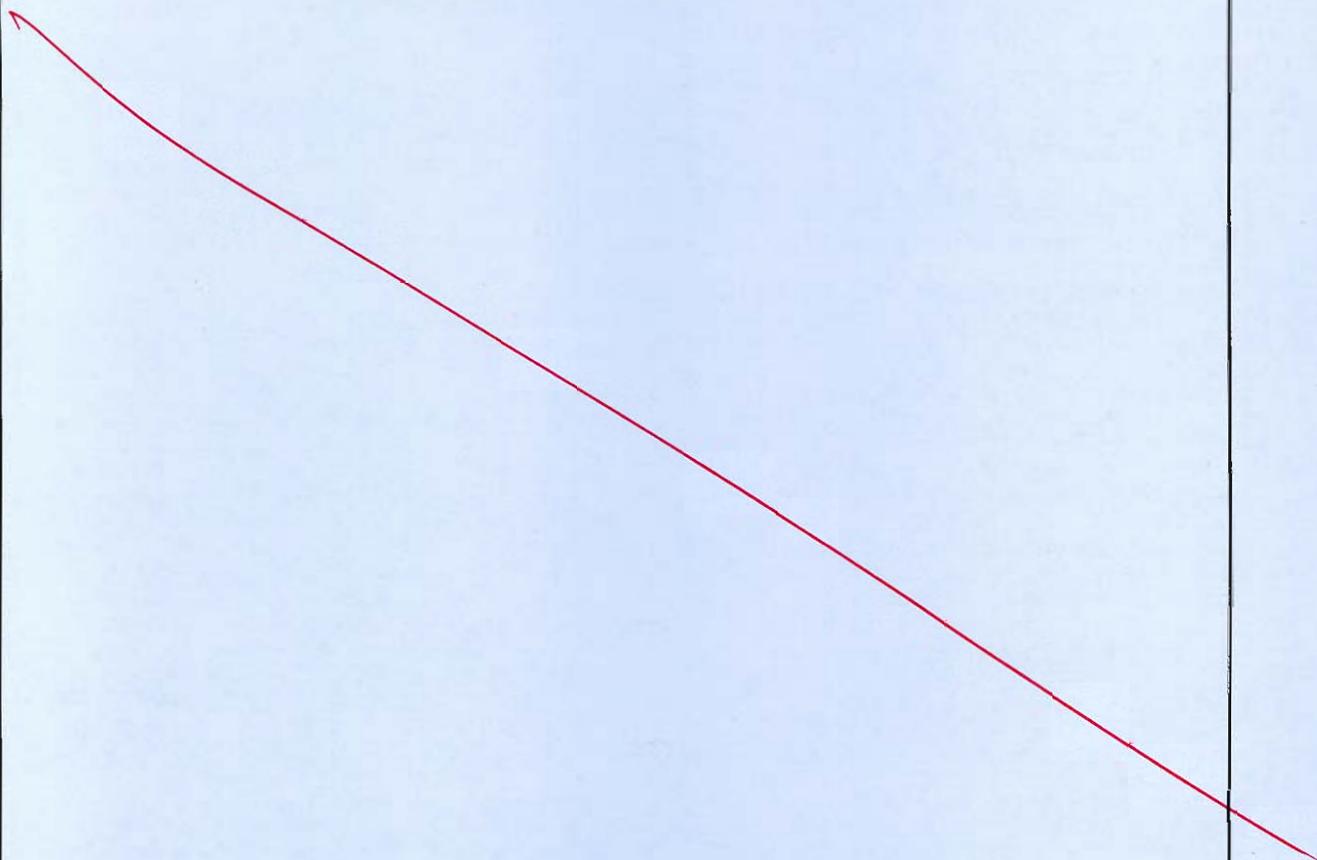





Q.3 (c) A rigid cylinder with a volume of 3.5 m^3 contains air at 200 kPa and 27°C . The heat is transferred to air from a constant temperature heat source at 1800 K and air in the cylinder is heated to 900 K . The atmosphere is at 1 bar and 17°C . Calculate the initial and final availability of air, maximum useful work and irreversibility. Neglect changes in kinetic and potential energies.

(For Air take, $c_p = 1.005 \text{ kJ/kgK}$, $c_v = 0.717 \text{ kJ/kgK}$, $R = 0.287 \text{ kJ/kgK}$)

[20 marks]

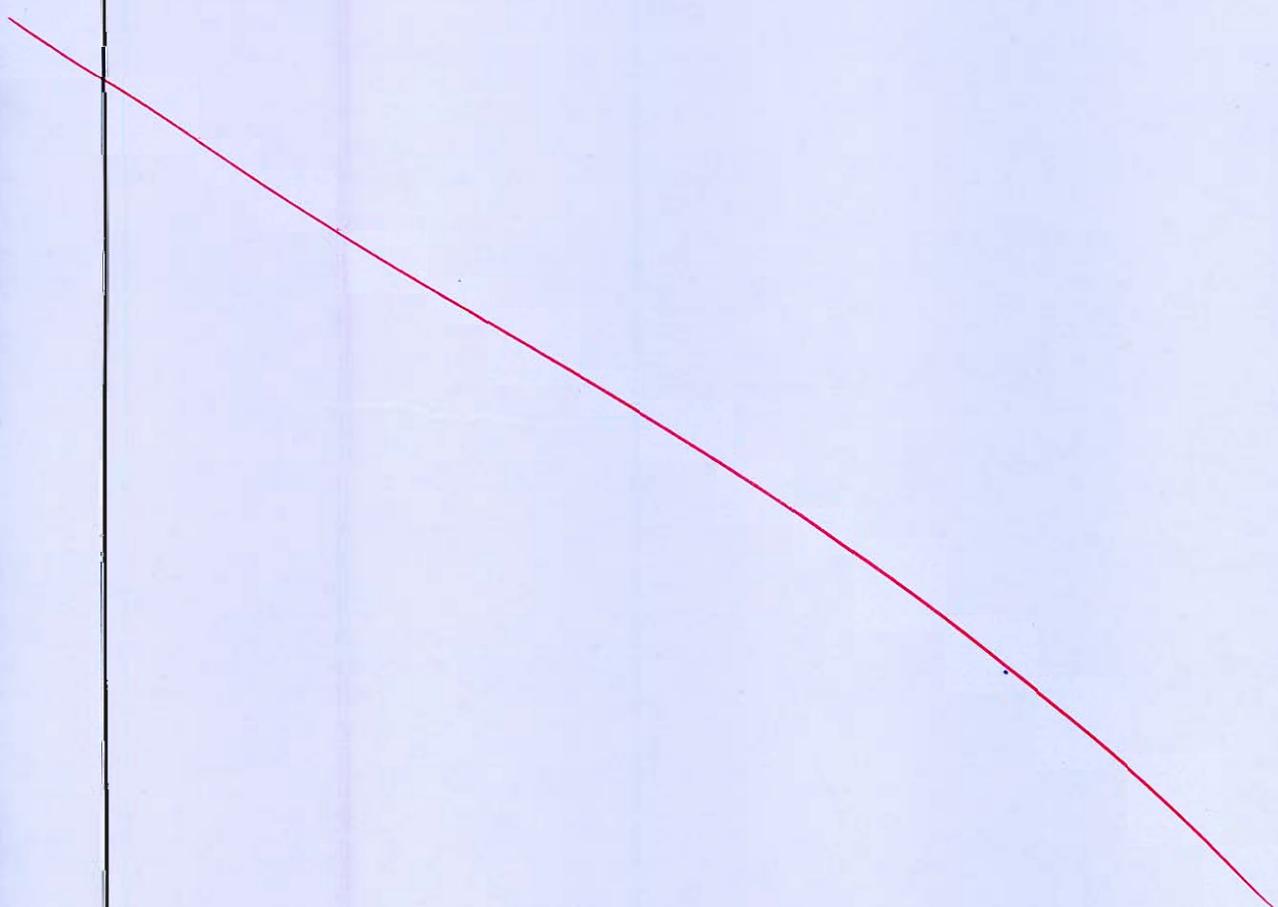


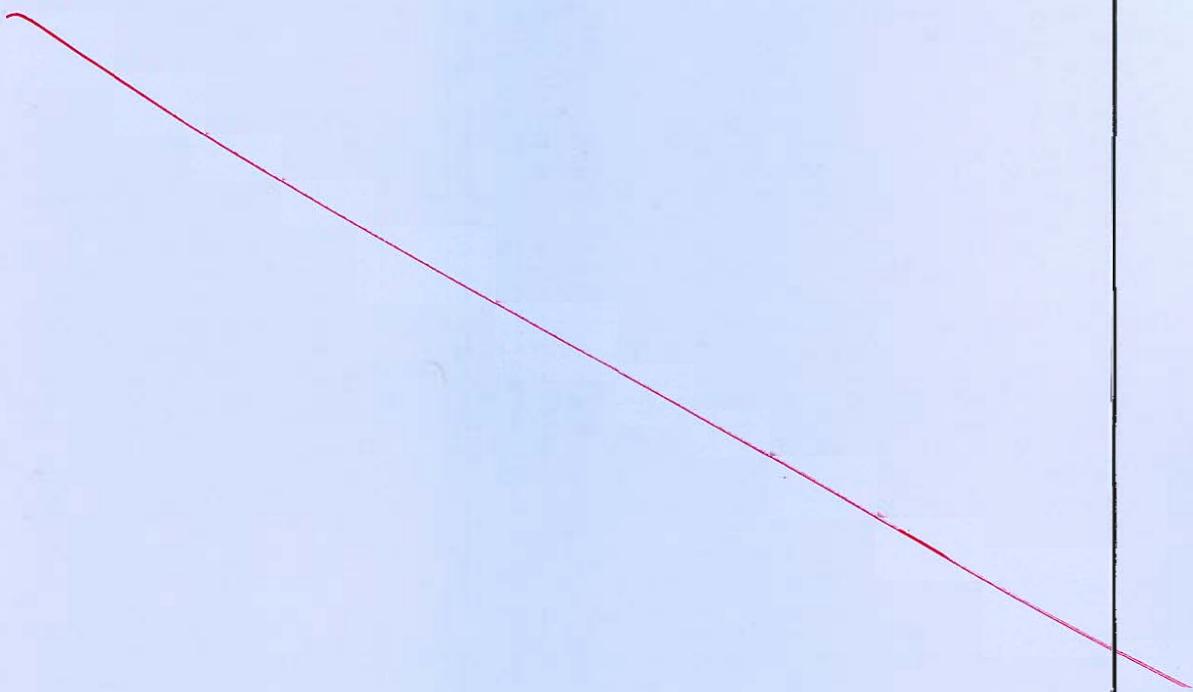

- Q.4 (a) It is proposed to produce 1500 kg of ice per hour from liquid water at 0°C in summer when the ambient atmospheric temperature is 42°C . It is planned to use a heat engine to operate the refrigeration plant. Hot water at 110°C which is produced by solar heating, may be used as a source to supply energy as heat to the heat engine and the engine uses the ambient atmospheric air as sink. Calculate
- the power required by the refrigeration plant
 - the ratio of the energy extracted as heat from the freezing water to the energy absorbed as heat by the heat engine and
 - the rate at which energy is rejected to the ambient atmosphere by both the devices.

The enthalpy of fusion of water at 0°C is 333.43 kJ/kg .


[20 marks]

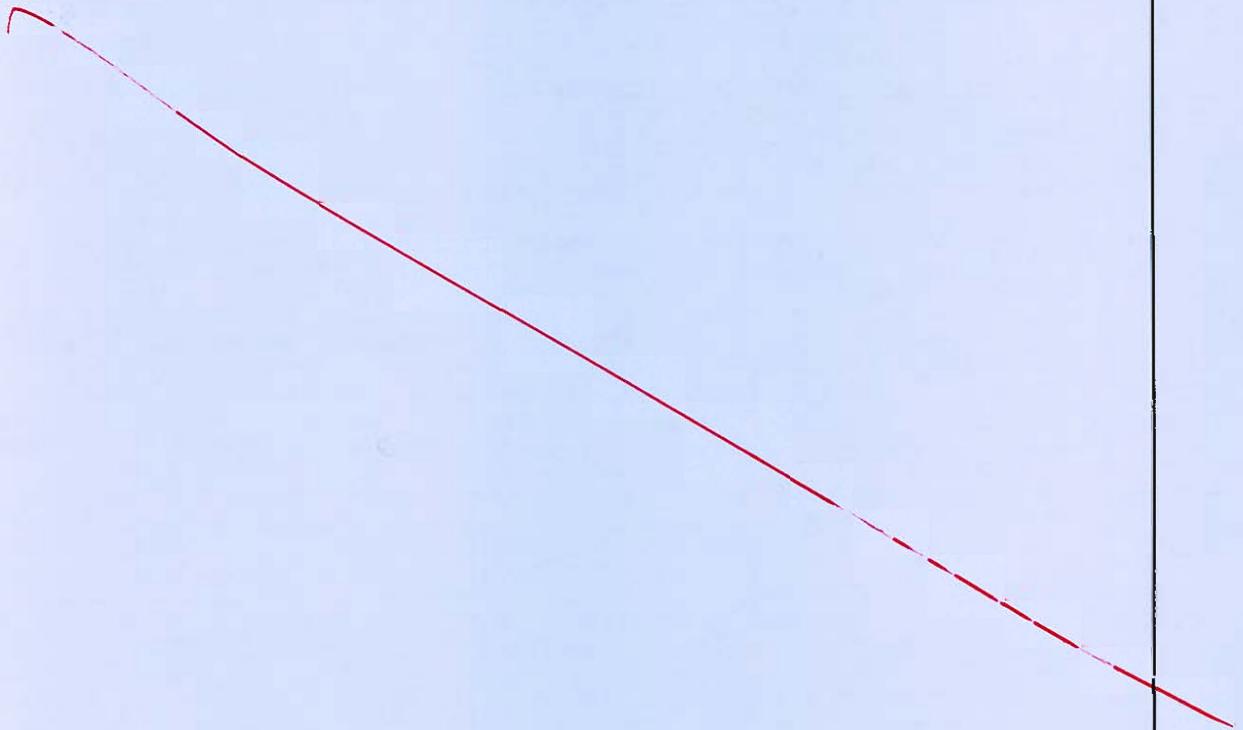


Q.4 (b) A tank having a volume of 0.95 m^3 initially contains water as a two phase liquid-vapour mixture at 300°C and a quality of 0.8. Saturated water vapour at 300°C is slowly withdrawn through a pressure regulating valve at the top of the tank as energy is transferred by heat to maintain the pressure constant in the tank. This continues until the tank is filled with saturated vapour at 300°C . Determine the amount of heat transfer. Neglect all kinetic and potential energy effects.

[Refer steam table attached]


[20 marks]

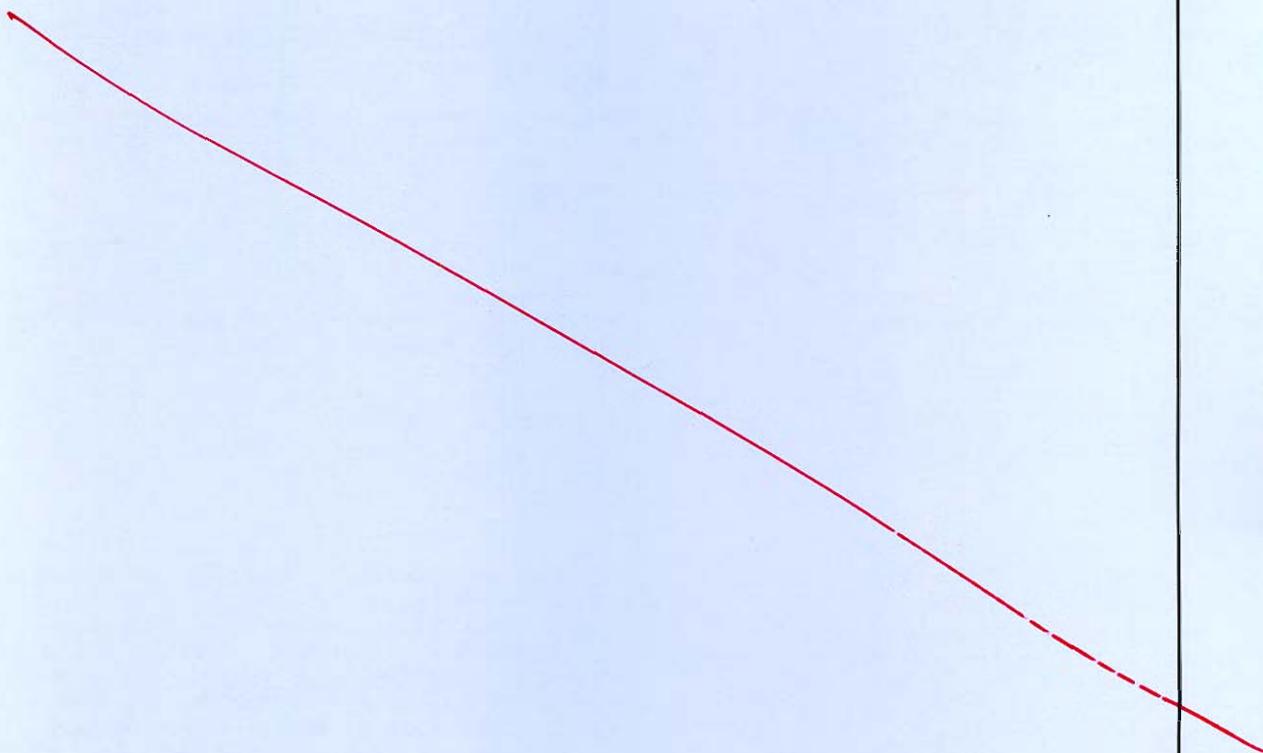


- Q.4 (c) In a laboratory, hot water stream at any desired temperature T can be produced by mixing cold water at 40°C (State 1) with hot water stream leaving the electric heater at 90°C (State 2) as shown in figure. Determine the entropy generation rate for producing a hot water stream of 1.5 kg/min at 60°C (State 3) by this arrangement. Neglect the small effect of pressure on subcooled water properties.
[Refer steam table attached]

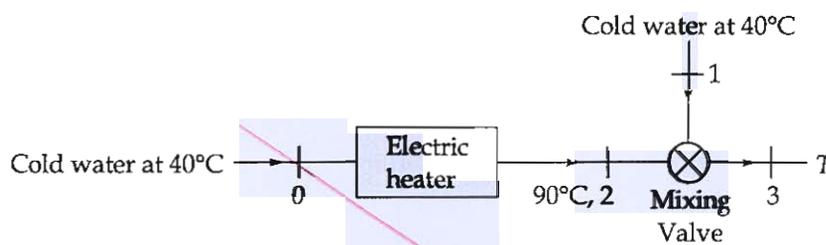

[20 marks]

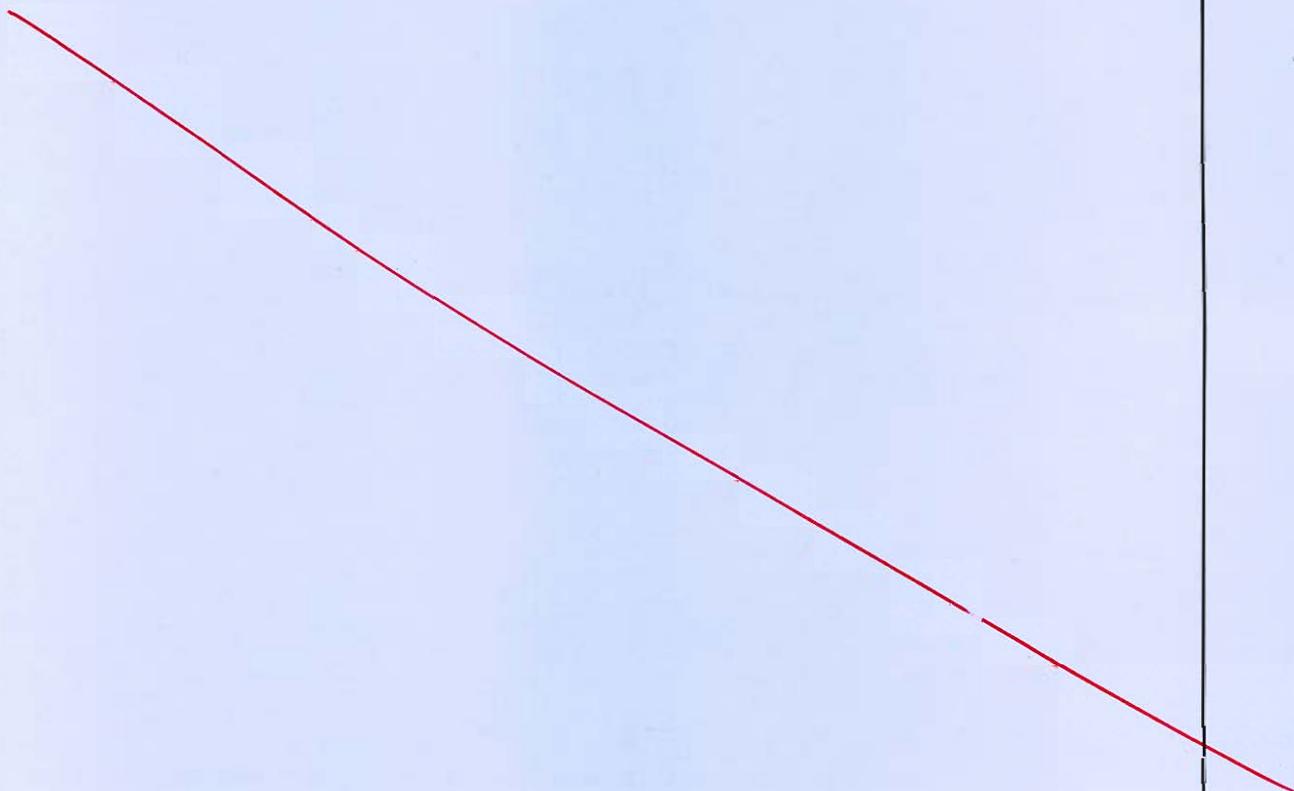

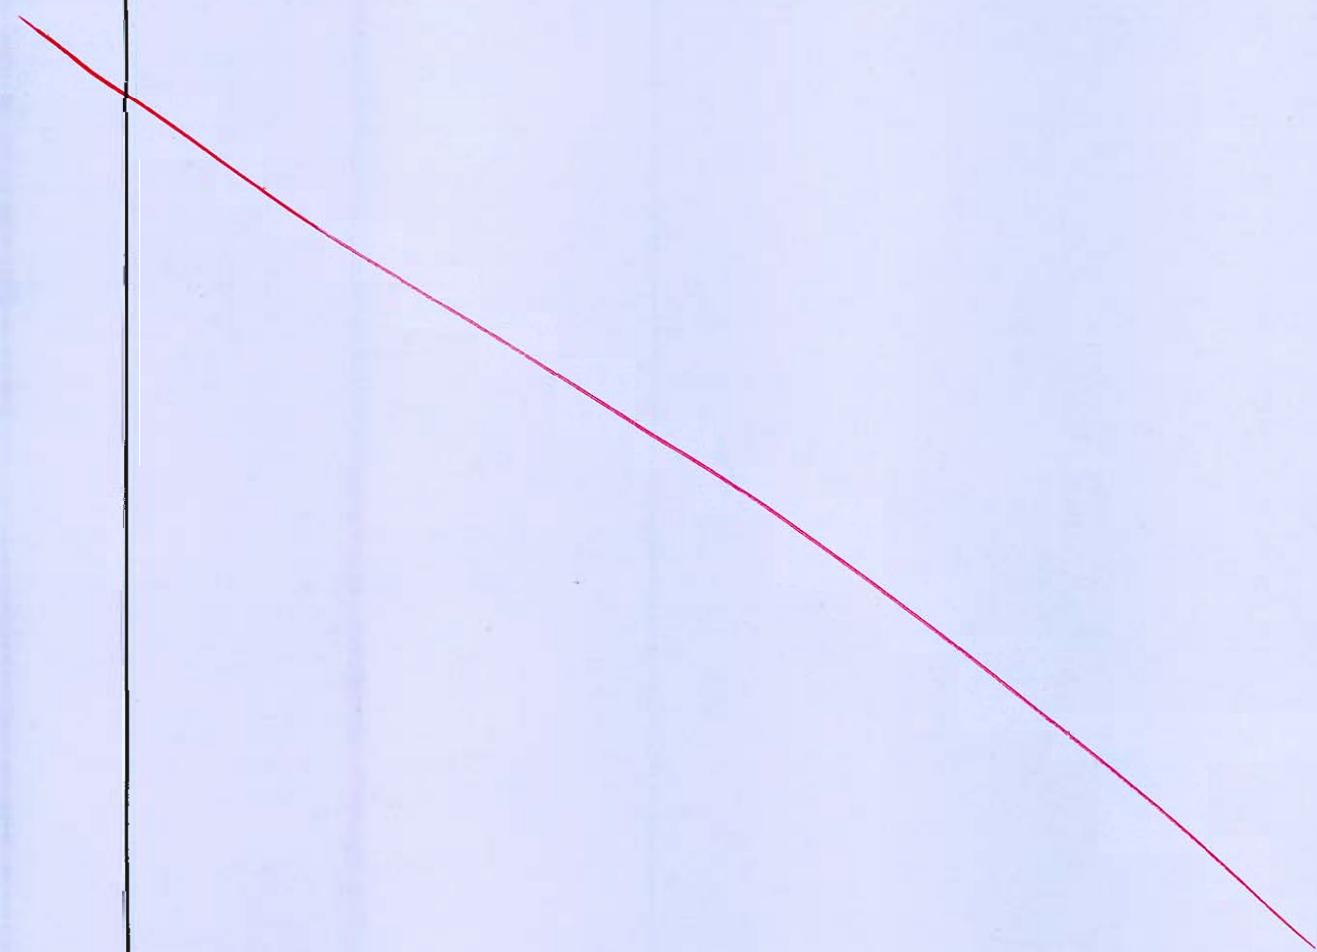

Saturated Water and Steam (Temperature-based)

T °C	P _{sat} MPa	v _g m ³ /kg	u _g kJ/kg	h _g kJ/kg	s _g kJ/kg K	v _f m ³ /kg	u _f kJ/kg	h _f kJ/kg	s _f kJ/kg K	v _g m ³ /kg	u _g kJ/kg	h _g kJ/kg	s _g kJ/kg K
0.01	0.0006117	0.00100021	205.391	0	2374.9	0.00	2500.9	2500.9	0	0.1555	9.1555	8.7066	8.7066
1	0.0006571	0.00100015	192.139	4.18	2376.2	4.18	2502.7	2498.6	0.01526	9.1291	9.1128	8.7070	8.7070
2	0.0007060	0.00100011	179.758	8.39	2377.7	8.39	2504.6	2496.2	0.03061	9.1027	9.0720	8.7073	8.7073
3	0.0007581	0.00100008	168.008	12.60	2379.0	12.60	2506.4	2493.8	0.04589	9.0765	9.0396	8.7075	8.7075
4	0.0008135	0.00100007	157.116	16.81	2380.4	16.81	2508.2	2491.4	0.06110	9.0505	8.9894	8.7077	8.7077
5	0.0008726	0.00100008	147.011	21.02	2381.8	21.02	2510.1	2489.0	0.07625	9.0248	8.9486	8.7078	8.7078
6	0.0009354	0.00100011	137.633	25.22	2383.2	25.22	2511.9	2486.7	0.09134	8.9993	8.9080	8.7079	8.7079
7	0.0010021	0.00100014	128.923	29.43	2384.5	29.43	2513.7	2484.3	0.10637	8.9713	8.8677	8.7080	8.7080
8	0.0010730	0.00100020	120.829	33.63	2385.8	33.63	2515.6	2481.9	0.12133	8.9491	8.8278	8.7081	8.7081
9	0.0011483	0.00100026	113.301	37.82	2387.3	37.82	2517.4	2479.6	0.13621	8.9243	8.7881	8.7082	8.7082
10	0.0012282	0.00100035	106.303	42.02	2388.6	42.02	2519.2	2477.2	0.15109	8.8998	8.7487	8.7083	8.7083
11	0.0013130	0.00100044	99.787	46.22	2390.0	46.22	2521.0	2474.8	0.16587	8.8754	8.7096	8.7084	8.7084
12	0.0014028	0.00100055	93.719	50.41	2391.4	50.41	2522.9	2472.5	0.18061	8.8513	8.6707	8.7085	8.7085
13	0.0014981	0.00100067	88.061	54.60	2392.8	54.60	2524.7	2470.1	0.19528	8.8274	8.6321	8.7086	8.7086
14	0.0015990	0.00100080	82.793	58.79	2394.1	58.79	2526.5	2467.7	0.20990	8.8037	8.5938	8.7087	8.7087
15	0.0017058	0.00100094	77.875	62.98	2395.5	62.98	2528.3	2465.4	0.22446	8.7803	8.5558	8.7088	8.7088
16	0.0018188	0.00100110	73.286	67.17	2396.9	67.17	2530.2	2463.0	0.23897	8.7570	8.5180	8.7089	8.7089
17	0.0019384	0.00100127	69.001	71.36	2398.2	71.36	2532.0	2460.6	0.25343	8.7339	8.4805	8.7090	8.7090
18	0.0020647	0.00100145	64.998	75.54	2399.6	75.54	2533.8	2458.3	0.26783	8.7111	8.4433	8.7091	8.7091
19	0.0021983	0.00100164	61.256	79.73	2400.9	79.73	2535.6	2456.0	0.28218	8.6884	8.4063	8.7092	8.7092
20	0.0023393	0.00100184	57.757	83.91	2402.3	83.91	2537.4	2453.7	0.29648	8.6660	8.3695	8.7093	8.7093
21	0.0024882	0.00100205	54.483	88.10	2403.7	88.10	2539.3	2451.4	0.31073	8.6437	8.3330	8.7094	8.7094
22	0.0026453	0.00100228	51.418	92.28	2405.1	92.28	2541.1	2449.1	0.32503	8.6217	8.2967	8.7095	8.7095
23	0.0028111	0.00100254	48.548	96.46	2406.4	96.46	2542.9	2446.8	0.33908	8.5998	8.2607	8.7096	8.7096
24	0.0029858	0.00100282	45.858	100.65	2407.8	100.65	2544.7	2444.5	0.35318	8.5781	8.2250	8.7097	8.7097
25	0.0031699	0.00100310	43.337	104.83	2409.1	104.83	2546.5	2442.2	0.36722	8.5566	8.1894	8.7098	8.7098
26	0.0033639	0.00100339	40.973	109.01	2410.5	109.01	2548.3	2439.9	0.38123	8.5353	8.1541	8.7099	8.7099
27	0.0035681	0.00100369	38.751	113.19	2411.8	113.19	2550.1	2437.6	0.39518	8.5142	8.1191	8.7100	8.7100
28	0.0037831	0.00100400	36.672	117.37	2413.2	117.37	2551.9	2435.3	0.40908	8.4933	8.0842	8.7101	8.7101
29	0.0040092	0.00100431	34.716	121.55	2414.5	121.55	2553.7	2433.0	0.42294	8.4725	8.0496	8.7102	8.7102
30	0.0042470	0.00100464	32.878	125.73	2415.9	125.73	2555.5	2430.7	0.43675	8.4520	8.0152	8.7103	8.7103
31	0.0044969	0.00100497	31.151	129.91	2417.2	129.91	2557.3	2428.4	0.45052	8.4316	7.9810	8.7104	8.7104
32	0.0047596	0.00100531	29.526	134.09	2418.5	134.09	2559.2	2426.1	0.46424	8.4113	7.9471	8.7105	8.7105
33	0.0050354	0.00100567	27.998	138.26	2419.8	138.26	2561.0	2423.7	0.47792	8.3913	7.9134	8.7106	8.7106
34	0.0053251	0.00100605	26.560	142.41	2421.1	142.41	2562.8	2421.3	0.49155	8.3714	7.8799	8.7107	8.7107
35	0.0056290	0.00100645	25.205	146.62	2422.4	146.62	2564.5	2418.9	0.50513	8.3517	7.8466	8.7108	8.7108
36	0.0059479	0.00100686	23.929	150.80	2423.7	150.80	2566.3	2416.5	0.51867	8.3321	7.8135	8.7109	8.7109
37	0.0062828	0.00100729	22.727	154.98	2425.0	154.98	2568.1	2414.1	0.53217	8.3127	7.7806	8.7110	8.7110
38	0.0066348	0.00100773	21.593	159.16	2426.3	159.16	2569.9	2411.7	0.54562	8.2935	7.7479	8.7111	8.7111
39	0.0070042	0.00100818	20.524	163.34	2427.6	163.34	2571.7	2409.3	0.55903	8.2745	7.7154	8.7112	8.7112
40	0.0073919	0.00100865	19.515	167.52	2428.9	167.52	2573.5	2406.9	0.57240	8.2555	7.6831	8.7113	8.7113

Saturated Water and Steam (Temperature-based), Contd.

T °C	P _{sat} MPa	v _g m ³ /kg	u _g kJ/kg	h _g kJ/kg	s _g kJ/kg K	v _f m ³ /kg	u _f kJ/kg	h _f kJ/kg	s _f kJ/kg K	v _g m ³ /kg	u _g kJ/kg	h _g kJ/kg	s _g kJ/kg K
40	0.0077849	0.00100913	19.515	167.52	2429.4	167.52	2575.3	2406.0	0.57240	8.2555	7.6831	8.7113	8.7113
41	0.0081978	0.00100960	18.563	171.70	2430.7	171.70	2577.3	2404.6	0.58573	8.2368	7.6511	8.7114	8.7114
42	0.0086306	0.00101008	17.694	175.88	2432.1	175.88	2579.4	2403.2	0.59900	8.2182	7.6192	8.7115	8.7115
43	0.0090838	0.00101057	16.811	180.06	2433.4	180.06	2581.6	2401.8	0.61225	8.1998	7.5875	8.7116	8.7116
44	0.0095570	0.00101106	16.011	184.24	2434.7	184.24	2583.9	2399.4	0.62545	8.1815	7.5560	8.7117	8.7117
45	0.0100409	0.00101156	15.292	188.42	2436.1	188.42	2586.3	2397.0	0.63861	8.1633	7.5247	8.7118	8.7118
46	0.0105359	0.00101206	14.634	192.60	2437.4	192.60	2588.8	2394.6	0.65173	8.1453	7.4936	8.7119	8.7119
47	0.0110427	0.00101256	14.035	196.79	2438.8	196.79	2591.3	2392.2	0.66481	8.1275	7.4627	8.7120	8.7120
48	0.0115617	0.00101306	13.492	200.97	2440.1	200.97	2593.8	2389.8	0.67785	8.1098	7.4320	8.7121	8.7121
49	0.0120933	0.00101356	12.999	205.15	2441.4	205.15	2596.3	2387.4	0.69085	8.0922	7.4014	8.7122	8.7122
50	0.0126382	0.00101406	12.552	209.33	2442.7	209.33	2598.8	2385.0	0.70381	8.0748	7.3710	8.7123	8.7123
51	0.0131978	0.00101456	12.151	213.51	2444.1	213.51	2601.3	2382.5	0.71673	8.0576	7.3408	8.7124	8.7124
52	0.0137721	0.00101506	11.793	217.70	2445.4	217.70	2603.8	2380.1	0.72961	8.0404	7.3108	8.7125	8.7125
53	0.0143619	0.00101556	11.477	221.88	2446.7	221.88	2606.3	2377.7	0.74245	8.0234	7.2810	8.7126	8.7126
54	0.0149672	0.00101606	11.200	226.06	2448.0	226.06	2608.8	2375.3	0.75525	8.0066	7.2513	8.7127	8.7127
55	0.0155882	0.00101656	10.961	230.24	2449.3	230.24	2611.3	2372.9	0.76802	7.9898	7.2218	8.7128	8.7128
56	0.0162253	0.00101706	10.756	234.42	2450.6	234.42	2613.8	2370.5	0.78075	7.9732	7.1925	8.7129	8.7129
57	0.0168790	0.00101756	10.580	238.60	2452.0	238.60	2616.3	2368.0	0.79344	7.9568	7.1633	8.7130	8.7130
58	0.0175497	0.00101806	10.433	242.79	2453.2	242.79	2618.8	2365.6	0.80610	7.9409	7.1343	8.7131	8.7131
59	0.0182379	0.00101856	10.312	246.99	2454.4	246.99	2621.3	2363.2	0.81871	7.9242	7.1055	8.7132	8.7132
60	0.0189436	0.00101906	10.212	251.18	2455.6	251.18	2623.8	2360.8	0.83129	7.9081	7.0769	8.7133	8.7133
61	0.0196688	0.00101956	10.130	255.37	2456.8	255.37	2626.3	2358.4	0.84384	7.8922	7.0484	8.7134	8.7134
62	0.0204147	0.00102006	10.063	259.55	2458.0	259.55	2628.8	2356.0	0.85634	7.8761	7.0200	8.7135	8.7135
63	0.0211825	0.00102056	10.009	263.72	2459.2	263.72	2631.3	2353.6	0.86882	7.8607	6.9918	8.7136	8.7136
64	0.0219723	0.00102106	9.966	267.89	2460.4	267.89	2633.8	2351.2	0.88125	7.8451	6.9638	8.7137	8.7137
65	0.0227842	0.00102156	9.933	272.09	2461.6	272.09	2636.3	2348.8	0.89365	7.8296	6.9359	8.7138	8.7138
66	0.0236183	0.00102206	9.909	276.27	2462.8	276.27	2638.8	2346.4	0.90602	7.8142	6.9082	8.7139	8.7139
67	0.0244746	0.00102256	9.893	280.46	2464.0	280.46	2641.3	2344.0	0.91835	7.7989	6.8807	8.7140	8.7140
68	0.0253539	0.00102306	9.885	284.65	2465.2	284.65	2643.8	2341.6	0.93064	7.7839	6.8532	8.7141	8.7141
69	0.0262572	0.00102356	9.884	288.84	2466.4	288.84	2646.3	2339.2	0.94291	7.7689	6.8260	8.7142</	

Saturated Water and Steam (Temperature-based), Contd.

T °C	P _{sat} MPa	v _f m ³ /kg	v _g m ³ /kg	u _f kJ/kg	u _g kJ/kg	h _f kJ/kg	h _g kJ/kg	s _f kJ/kg.K	s _g kJ/kg.K
80	0.01714	0.00102905	3.3052	334.96	2181.5	335.01	2643.0	1.0756	7.6111
81	0.018367	0.00102972	3.2789	339.16	2182.8	339.21	2641.7	2305.5	1.0874
82	0.019738	0.00103038	3.1581	343.36	2184.1	343.41	2640.4	2302.9	1.0993
83	0.021276	0.00103106	3.0425	347.55	2185.3	347.61	2639.1	2300.4	1.1111
84	0.022983	0.00103174	2.9318	351.75	2186.6	351.81	2637.7	2297.9	1.1229
85	0.024867	0.00103243	2.8258	355.95	2187.8	356.01	2636.3	2295.4	1.1346
86	0.026932	0.00103312	2.7241	360.16	2189.1	360.22	2635.0	2292.8	1.1463
87	0.029186	0.00103382	2.6271	364.36	2190.3	364.42	2633.6	2290.2	1.1580
88	0.031637	0.00103452	2.5340	368.56	2191.5	368.63	2632.3	2287.6	1.1696
89	0.034295	0.00103524	2.4447	372.76	2192.7	372.83	2630.9	2285.1	1.1813
90	0.037182	0.00103595	2.3591	376.97	2193.9	377.04	2629.5	2282.5	1.1929
91	0.040320	0.00103668	2.2770	381.17	2195.2	381.25	2628.1	2279.9	1.2044
92	0.043728	0.00103741	2.1982	385.38	2196.4	385.46	2626.8	2277.3	1.2160
93	0.047426	0.00103814	2.1227	389.59	2197.6	389.67	2625.4	2274.7	1.2275
94	0.051431	0.00103888	2.0502	393.80	2198.8	393.88	2624.0	2272.1	1.2389
95	0.055868	0.00103963	1.9806	398.00	2199.9	398.09	2622.6	2269.5	1.2501
96	0.060771	0.00104038	1.9137	402.21	2201.2	402.30	2621.2	2266.9	1.2618
97	0.066180	0.00104114	1.8496	406.43	2202.4	406.52	2619.8	2264.3	1.2732
98	0.072130	0.00104191	1.7879	410.63	2203.6	410.73	2618.4	2261.7	1.2846
99	0.078782	0.00104268	1.7287	414.85	2204.8	414.95	2617.0	2259.0	1.2959
100	0.086182	0.00104346	1.6718	419.06	2206.0	419.17	2615.6	2256.4	1.3072
101	0.094369	0.00104425	1.6171	423.28	2207.2	423.39	2614.1	2253.8	1.3185
102	0.103407	0.00104504	1.5641	427.50	2208.4	427.61	2612.7	2251.1	1.3297
103	0.113357	0.00104583	1.5130	431.71	2209.6	431.83	2611.3	2248.5	1.3410
104	0.124281	0.00104664	1.4632	435.93	2210.7	436.05	2610.0	2245.8	1.3522
105	0.136252	0.00104744	1.4148	440.14	2211.9	440.27	2608.7	2243.1	1.3633
106	0.149345	0.00104826	1.3679	444.37	2213.0	444.50	2607.4	2240.4	1.3745
107	0.163635	0.00104908	1.3300	448.59	2214.2	448.73	2606.1	2237.7	1.3856
108	0.179207	0.00104991	1.2922	452.81	2215.4	452.95	2604.8	2235.1	1.3967
109	0.186163	0.00105074	1.2480	457.03	2216.5	457.18	2603.5	2232.4	1.4078
110	0.193488	0.00105158	1.2093	461.27	2217.7	461.42	2602.1	2229.6	1.4188
111	0.201286	0.00105243	1.1720	465.49	2218.8	465.65	2600.6	2226.9	1.4298
112	0.209562	0.00105328	1.1361	469.72	2219.9	469.88	2600.1	2224.2	1.4408
113	0.218328	0.00105414	1.1014	473.95	2221.0	474.12	2600.5	2221.5	1.4518
114	0.227597	0.00105500	1.0680	478.18	2222.2	478.35	2600.1	2218.7	1.4628
115	0.237381	0.00105588	1.0358	482.41	2223.3	482.59	2600.6	2216.0	1.4737
116	0.247694	0.00105675	1.0052	486.65	2224.4	486.83	2600.1	2213.2	1.4846
117	0.258550	0.00105764	0.9756	490.89	2225.5	491.08	2600.5	2210.5	1.4954
118	0.269964	0.00105853	0.9458	495.12	2226.6	495.32	2600.0	2207.7	1.5063
119	0.281946	0.00105942	0.9181	499.36	2227.8	499.56	2600.5	2204.9	1.5171
120	0.294507	0.00106033	0.8921	503.60	2228.8	503.81	2600.9	2202.1	1.5279

Saturated Water and Steam (Temperature-based), Contd.

T °C	P _{sat} MPa	v _f m ³ /kg	v _g m ³ /kg	u _f kJ/kg	u _g kJ/kg	h _f kJ/kg	h _g kJ/kg	s _f kJ/kg.K	s _g kJ/kg.K
280	6.1160	0.00133281	0.030153	1228.3	2779.9	1236.9	2779.9	1.5130	3.0685
281	6.5189	0.00133602	0.029657	1233.4	2780.4	1242.1	2778.7	1.5136	3.0777
282	6.9124	0.00133922	0.029169	1238.5	2781.6	1247.3	2777.5	1.5141	3.0869
283	7.3060	0.00134242	0.028680	1243.7	2782.7	1252.5	2776.3	1.5146	3.0961
284	7.7008	0.00134563	0.028219	1248.7	2783.7	1257.7	2775.1	1.5151	3.1053
285	8.1000	0.00134890	0.027756	1253.9	2784.8	1263.0	2773.9	1.5156	3.1145
286	8.5047	0.00135213	0.027309	1259.1	2785.8	1268.3	2772.7	1.5161	3.1237
287	8.9149	0.00135543	0.026853	1264.3	2786.8	1273.6	2771.5	1.5166	3.1329
288	9.3306	0.00135878	0.026413	1269.5	2787.8	1278.9	2770.4	1.5171	3.1421
289	9.7519	0.00136217	0.025981	1274.6	2788.7	1284.2	2769.3	1.5176	3.1513
290	10.1788	0.00136560	0.025555	1279.8	2789.6	1289.5	2768.2	1.5181	3.1605
291	10.6123	0.00136907	0.025136	1285.1	2790.4	1294.8	2767.1	1.5186	3.1697
292	11.0525	0.00137258	0.024724	1290.4	2791.2	1300.1	2766.0	1.5191	3.1789
293	11.5000	0.00137613	0.024319	1295.6	2792.0	1305.4	2764.9	1.5196	3.1881
294	11.9549	0.00137972	0.023921	1300.9	2792.8	1310.7	2763.8	1.5201	3.1973
295	12.4174	0.00138335	0.023529	1306.2	2793.6	1316.0	2762.7	1.5206	3.2065
296	12.8875	0.00138702	0.023143	1311.5	2794.4	1321.3	2761.6	1.5211	3.2157
297	13.3653	0.00139073	0.022763	1316.8	2795.2	1326.6	2760.5	1.5216	3.2249
298	13.8508	0.00139448	0.022389	1322.1	2796.0	1331.9	2759.4	1.5221	3.2341
299	14.3441	0.00139827	0.022022	1327.5	2796.8	1337.2	2758.3	1.5226	3.2433
300	14.8453	0.00140204	0.021660	1332.9	2797.6	1342.5	2757.2	1.5231	3.2525
301	15.3545	0.00140584	0.021301	1338.3	2798.4	1347.8	2756.1	1.5236	3.2617
302	15.8718	0.00140968	0.020948	1343.8	2799.2	1353.1	2755.0	1.5241	3.2709
303	16.3973	0.00141356	0.020600	1349.2	2799.9	1358.4	2753.9	1.5246	3.2801
304	16.9311	0.00141748	0.020258	1354.7	2800.7	1363.7	2752.8	1.5251	3.2893
305	17.4734	0.00142144	0.019923	1360.2	2801.4	1369.0	2751.7	1.5256	3.2985
306	18.0243	0.00142544	0.019593	1365.7	2802.1	1374.3	2750.6	1.5261	3.3077
307	18.5839	0.00142948	0.019269	1371.2	2802.8	1379.6	2749.5	1.5266	3.3169
308	19.1523	0.00143356	0.018950	1376.7	2803.5	1384.9	2748.4	1.5271	3.3261
309	19.7296	0.00143768	0.018637	1382.1	2804.2	1390.2	2747.3	1.5276	3.3353
310	20.3159	0.00144184	0.018329	1387.6	2804.9	1395.5	2746.2	1.5281	3.3445
311	20.9113	0.00144604	0.018025	1393.1	2805.6	1400.8	2745.1	1.5286	3.3537
312	21.5168	0.00145028	0.017724	1398.6	2806.3	1406.1	2744.0	1.5291	3.3629
313	22.1325	0.00145456	0.017426	1404.1	2807.0	1411.4	2742.9	1.5296	3.3721
314	22.7585	0.00145888	0.017131	1409.6	2807.7	1416.7	2741.8	1.5301	3.3813
315	23.3949	0.00146324	0.016839	1415.1	2808.4	1422.0	2740.7	1.5306	3.3905
316	24.0419	0.00146764	0.016550	1420.6	2809.1	1427.3	2739.6	1.5311	3.4000
317	24.6995	0.00147208	0.016264	1426.1	2809.8	1432.6	2738.5	1.5316	3.4095
318	25.3678	0.00147656	0.015981	1431.6	2810.5	1437.9	2737.4	1.5321	3.4190
319	26.0469	0.00148108	0.015701	1437.1	2811.2	1443.2	2736.3	1.5326	3.4285
320	26.7369	0.00148564	0.015424	1442.6	2811.9	1448.5	2735.2	1.5331	3.4380

Saturated Water and Steam (Pressure-based), Contd.

p MPa	T_{sat} °C	Volume, m^3/kg v_f	Volume, m^3/kg v_g	Energy, kJ/kg u_f	Energy, kJ/kg u_g	Enthalpy, kJ/kg h_f	Enthalpy, kJ/kg h_g	Entropy, kJ/(kg K) s_f	Entropy, kJ/(kg K) s_g
0.050	81.317	0.00102993	3.2400	340.49	2483.2	310.51	2645.2	1.0912	7.5930
0.055	83.709	0.00103151	2.9635	350.53	2486.2	350.59	2649.2	1.1191	7.5606
0.060	85.926	0.00103307	2.7317	359.85	2489.0	359.91	2652.9	1.1451	7.5311
0.065	87.993	0.00103452	2.5346	368.53	2491.6	368.60	2656.3	1.1696	7.5040
0.070	89.92	0.00103590	2.3648	376.68	2493.9	376.75	2659.4	1.1921	7.4790
0.075	91.738	0.00103723	2.2170	384.36	2496.1	384.41	2662.4	1.2132	7.4557
0.080	93.486	0.00103850	2.0871	391.63	2498.2	391.63	2665.2	1.2330	7.4339
0.085	95.125	0.00103972	1.9720	398.53	2500.2	398.62	2667.8	1.2518	7.4145
0.090	96.687	0.00104091	1.8694	405.11	2502.1	405.20	2670.3	1.2696	7.3973
0.095	98.178	0.00104205	1.7772	411.38	2503.9	411.48	2672.7	1.2866	7.3816
0.10	99.606	0.00104315	1.6939	417.40	2505.5	417.50	2674.9	1.3028	7.3688
0.11	102.292	0.00104527	1.5495	428.73	2508.8	428.84	2679.2	1.3330	7.3269
0.12	104.784	0.00104727	1.4284	439.23	2511.7	439.36	2683.1	1.3609	7.2977
0.13	107.109	0.00104917	1.3253	449.05	2514.3	449.19	2686.6	1.3868	7.2709
0.14	109.292	0.00105099	1.2366	458.27	2516.9	458.42	2690.0	1.4110	7.2461
0.15	111.349	0.00105273	1.1595	466.97	2519.2	467.13	2693.1	1.4337	7.2230
0.16	113.297	0.00105440	1.0911	475.21	2521.4	475.38	2696.0	1.4551	7.2014
0.17	115.148	0.00105600	1.0312	483.00	2523.5	483.22	2698.8	1.4753	7.1812
0.18	116.911	0.00105756	0.9747	490.51	2525.5	490.70	2701.4	1.4945	7.1621
0.19	118.596	0.00105906	0.92921	497.65	2527.3	497.85	2703.9	1.5127	7.1440
0.20	120.210	0.00106052	0.88568	504.49	2529.1	504.70	2706.2	1.5302	7.1269
0.21	121.759	0.00106193	0.84361	511.07	2530.8	511.29	2708.5	1.5469	7.1106
0.22	123.250	0.00106330	0.80300	517.40	2532.4	517.63	2710.6	1.5628	7.0951
0.23	124.686	0.00106464	0.77704	523.50	2533.9	523.71	2712.7	1.5782	7.0803
0.24	126.072	0.00106594	0.74668	529.38	2535.4	529.64	2714.6	1.5930	7.0661
0.25	127.411	0.00106722	0.71866	535.07	2536.8	535.34	2716.5	1.6072	7.0524
0.26	128.708	0.00106846	0.69273	540.59	2538.2	540.87	2718.3	1.6210	7.0394
0.27	129.967	0.00106968	0.66865	545.95	2539.5	546.24	2720.0	1.6343	7.0268
0.28	131.185	0.00107086	0.64624	551.14	2540.8	551.41	2721.7	1.6471	7.0146
0.29	132.370	0.00107203	0.62533	556.19	2542.0	556.40	2723.3	1.6596	7.0029
0.30	133.522	0.00107317	0.60576	561.11	2543.2	561.43	2724.9	1.6717	6.9916
0.31	134.644	0.00107429	0.58741	565.89	2544.3	566.22	2726.4	1.6835	6.9807
0.32	135.737	0.00107539	0.57017	570.56	2545.3	570.90	2727.8	1.6950	6.9701
0.33	136.802	0.00107647	0.55400	575.10	2546.3	575.46	2729.3	1.7060	6.9598
0.34	137.842	0.00107753	0.53886	579.51	2547.3	579.91	2730.6	1.7168	6.9498
0.35	138.857	0.00107857	0.52471	583.88	2548.2	584.26	2732.0	1.7274	6.9401
0.36	139.849	0.00107960	0.51159	588.13	2549.1	588.52	2733.2	1.7377	6.9307
0.37	140.819	0.00108061	0.49933	592.28	2550.0	592.68	2734.5	1.7477	6.9216
0.38	141.769	0.00108161	0.48792	596.34	2550.9	596.75	2735.7	1.7575	6.9126
0.39	142.698	0.00108259	0.47732	600.32	2551.8	600.71	2736.9	1.7671	6.9030
0.40	143.608	0.00108355	0.46758	604.22	2552.7	604.55	2738.1	1.7765	6.8935

Saturated Water and Steam (Pressure-based), Contd.

p MPa	T_{sat} °C	Volume, m^3/kg v_f	Volume, m^3/kg v_g	Energy, kJ/kg u_f	Energy, kJ/kg u_g	Enthalpy, kJ/kg h_f	Enthalpy, kJ/kg h_g	Entropy, kJ/(kg K) s_f	Entropy, kJ/(kg K) s_g
0.40	143.608	0.00108355	0.46758	604.22	2552.7	604.55	2738.1	1.7765	6.8935
0.42	145.375	0.00108541	0.44165	611.79	2554.8	612.25	2742.3	1.7916	6.8791
0.44	147.076	0.00108729	0.42274	619.10	2556.6	619.58	2746.4	1.8046	6.8657
0.46	148.716	0.00108918	0.40542	626.14	2558.2	626.64	2750.4	1.8177	6.8531
0.48	150.300	0.00109108	0.38950	632.95	2559.7	633.47	2754.3	1.8308	6.8414
0.50	151.831	0.00109295	0.37481	639.54	2561.1	640.09	2758.1	1.8438	6.8307
0.52	153.311	0.00109483	0.36120	645.93	2562.4	646.50	2761.8	1.8567	6.8207
0.54	154.753	0.00109678	0.34858	652.13	2563.6	652.72	2765.5	1.8695	6.8114
0.56	156.159	0.00109874	0.33682	658.16	2564.7	658.77	2769.1	1.8822	6.8025
0.58	157.536	0.00109995	0.32585	664.01	2565.7	664.65	2772.6	1.8948	6.7941
0.60	158.886	0.00110090	0.31558	669.72	2566.6	670.38	2776.1	1.9073	6.7862
0.62	160.112	0.00110212	0.30596	675.28	2567.4	675.96	2779.6	1.9197	6.7788
0.64	161.365	0.00110392	0.29691	680.70	2568.1	681.41	2783.0	1.9320	6.7718
0.66	162.587	0.00110509	0.28840	686.00	2568.7	686.73	2786.3	1.9442	6.7650
0.68	163.781	0.00110653	0.28036	691.17	2570.0	691.92	2789.5	1.9563	6.7584
0.70	164.946	0.00110796	0.27277	696.22	2571.1	697.00	2792.8	1.9683	6.7521
0.72	166.086	0.00110936	0.26559	701.17	2572.1	701.97	2796.0	1.9802	6.7461
0.74	167.200	0.00111075	0.25879	706.02	2573.0	706.81	2799.2	1.9920	6.7403
0.76	168.291	0.00111211	0.25233	710.76	2573.8	711.61	2802.4	1.0038	6.7347
0.78	169.360	0.00111346	0.24618	715.41	2574.5	716.28	2805.6	1.0155	6.7293
0.80	170.406	0.00111478	0.24031	719.97	2575.0	720.86	2808.7	1.0271	6.7241
0.82	171.433	0.00111609	0.23477	724.41	2575.8	725.36	2811.9	1.0387	6.7191
0.84	172.440	0.00111739	0.22946	728.84	2576.6	729.78	2815.0	1.0502	6.7143
0.86	173.428	0.00111867	0.22438	733.15	2577.2	734.11	2818.1	1.0617	6.7096
0.88	174.398	0.00111993	0.21953	737.38	2577.8	738.37	2821.2	1.0731	6.7051
0.90	175.350	0.00112118	0.21489	741.55	2578.3	742.56	2824.3	1.0845	6.7007
0.92	176.287	0.00112242	0.21044	745.65	2578.9	746.68	2827.4	1.0958	6.6964
0.94	177.207	0.00112364	0.20617	749.67	2579.4	750.73	2830.5	1.1071	6.6922
0.96	178.112	0.00112483	0.20208	753.61	2579.9	754.72	2833.6	1.1183	6.6881
0.98	179.002	0.00112601	0.19814	757.55	2580.4	758.65	2836.7	1.1295	6.6841
1.00	179.878	0.00112719	0.19436	761.39	2580.9	762.52	2839.8	1.1406	6.6801
1.05	182.089	0.00113011	0.18552	770.75	2581.4	771.91	2849.0	1.1587	6.6761
1.10	184.062	0.00113299	0.17745	779.78	2581.9	780.82	2858.2	1.1758	6.6720
1.15	186.013	0.00113577	0.17006	788.51	2582.4	789.82	2867.3	1.1916	6.6680
1.20	187.937	0.00113850	0.16326	796.96	2582.9	798.33	2876.3	1.2073	6.6641
1.25	189.849	0.00114118	0.15699	805.15	2583.4	806.58	2885.3	1.2228	6.6602
1.30	191.745	0.00114380	0.15119	813.11	2583.9	814.60	2894.3	1.2381	6.6563
1.35	193.617	0.00114638	0.14580	820.84	2584.4	822.39	2903.3	1.2532	6.6524
1.40	195.469	0.00114892	0.14078	828.36	2584.9	829.97	2912.3	1.2681	6.6485
1.45	197.305	0.00115141	0.13609	835.68	2585.4	837.35	2921.3	1.2828	6.6446
1.50	198.247	0.00115387	0.13171	842.83	2585.9	844.56	2930.3	1.2973	6.6407

Saturated Water and Steam (Pressure-based), Contd.

p MPa	T_{sat} °C	v_f	v_g	u_f	u_g	h_f	h_g	s_f	s_g	Entropy, kJ/(kg K)
1.50	198.287	0.0015387	0.13171	812.88	2393.4	814.56	2731.0	1.946	2.3113	6.130
1.55	199.818	0.0015629	0.12760	819.80	2391.4	851.59	2731.9	1.943	2.3291	6.4313
1.60	201.370	0.0015868	0.12374	826.61	2391.8	888.46	2732.8	1.941	2.3435	6.4199
1.65	202.856	0.0016103	0.12010	833.25	2395.5	925.71	2733.7	1.928	2.3575	6.4089
1.70	204.307	0.0016336	0.11667	839.76	2396.2	962.71	2734.5	1.927	2.3711	6.3981
1.75	205.725	0.0016565	0.11343	846.13	2396.7	999.47	2735.2	1.917	2.3845	6.3877
1.80	207.112	0.0016792	0.11037	852.37	2397.2	1035.91	2735.9	1.914	2.3975	6.3775
1.85	208.469	0.0017016	0.10746	858.49	2397.8	1072.06	2736.6	1.905	2.4102	6.3675
1.90	209.798	0.0017238	0.10470	864.48	2398.3	1107.92	2737.2	1.900	2.4227	6.3578
1.95	211.101	0.0017458	0.10208	870.37	2398.7	1143.51	2737.8	1.895	2.4348	6.3483
2.0	212.377	0.0017675	0.099585	876.15	2399.1	1178.85	2738.3	1.890	2.4468	6.3390
2.1	214.858	0.0018103	0.094938	917.39	2399.9	1199.87	2739.3	1.870	2.4699	6.3210
2.2	217.249	0.0018523	0.090098	928.26	2400.6	1200.87	2800.1	1.860	2.4921	6.3038
2.3	219.557	0.0018936	0.086815	938.79	2401.1	1211.53	2800.8	1.850	2.5136	6.2872
2.4	221.789	0.0019343	0.083214	949.01	2401.6	1221.87	2801.4	1.840	2.5343	6.2712
2.5	223.950	0.0019743	0.079949	958.92	2402.0	1231.91	2801.9	1.830	2.5543	6.2558
2.6	226.046	0.0020138	0.076809	968.55	2402.4	1241.66	2802.3	1.820	2.5736	6.2409
2.7	228.080	0.0020528	0.073783	977.93	2402.7	1251.18	2802.7	1.812	2.5921	6.2264
2.8	230.057	0.0020913	0.070871	987.07	2402.9	1260.46	2802.9	1.804	2.6100	6.2124
2.9	231.980	0.0021293	0.068068	995.99	2403.1	1269.51	2803.1	1.803	2.6283	6.1988
3.0	233.853	0.0021669	0.065361	1004.6	2403.2	1278.35	2803.2	1.791	2.6455	6.1856
3.1	235.679	0.0022042	0.062701	1013.2	2403.2	1287.0	2803.2	1.786	2.6623	6.1727
3.2	237.459	0.0022410	0.060085	1021.5	2403.2	1295.5	2803.1	1.777	2.6787	6.1602
3.3	239.198	0.0022776	0.057561	1029.6	2403.1	1303.7	2803.0	1.769	2.6946	6.1479
3.4	240.897	0.0023138	0.055126	1037.6	2403.1	1311.8	2802.9	1.761	2.7102	6.1360
3.5	242.557	0.0023497	0.052768	1045.5	2402.9	1319.8	2802.6	1.752	2.7254	6.1243
3.6	244.182	0.0023851	0.050486	1053.1	2402.8	1327.6	2802.4	1.744	2.7403	6.1129
3.7	245.772	0.0024201	0.048261	1060.7	2402.6	1335.3	2802.1	1.736	2.7549	6.1018
3.8	247.330	0.0024549	0.046092	1068.1	2402.3	1342.8	2801.7	1.728	2.7691	6.0908
3.9	248.857	0.0024898	0.043976	1075.3	2402.1	1350.2	2801.3	1.721	2.7831	6.0801
4.0	250.351	0.0025256	0.041916	1082.5	2401.7	1357.5	2800.8	1.713	2.7968	6.0696
4.1	251.823	0.0025601	0.040025	1089.6	2401.3	1364.7	2800.3	1.705	2.8102	6.0592
4.2	253.261	0.0025944	0.038232	1096.4	2401.0	1371.7	2799.8	1.698	2.8231	6.0491
4.3	254.680	0.0026286	0.036532	1103.3	2400.6	1378.7	2799.2	1.690	2.8356	6.0391
4.4	256.070	0.0026626	0.034926	1110.3	2400.2	1385.5	2798.6	1.683	2.8476	6.0293
4.5	257.437	0.0026965	0.033405	1117.5	2399.7	1392.2	2797.9	1.675	2.8591	6.0197
4.6	258.780	0.0027303	0.031969	1124.8	2399.2	1398.8	2797.3	1.668	2.8701	6.0102
4.7	260.101	0.0027638	0.030610	1132.5	2398.6	1405.3	2796.5	1.661	2.8809	6.0009
4.8	261.402	0.0027973	0.029320	1140.5	2398.1	1411.8	2795.8	1.653	2.8917	5.9917
4.9	262.681	0.0028306	0.028096	1148.2	2397.5	1418.3	2795.0	1.646	2.9025	5.9826
5.0	263.941	0.0028639	0.026936	1156.2	2397.0	1424.8	2794.2	1.639	2.9132	5.9737

T °C	v m ³ /kg	u kJ/kg	h kJ/kg	s kJ/kg K	T °C	v m ³ /kg	u kJ/kg	h kJ/kg	s kJ/kg K
*0	0.001000016	-0.01	0.06	-0.00015	270	2.4993	2764.5	3014.1	8.1091
5	0.001000003	21.02	21.12	0.07625	280	2.5159	2779.8	3031.4	8.1159
10	0.001000030	42.02	42.12	0.15108	290	2.5324	2795.1	3048.7	8.1188
15	0.001000090	62.98	63.08	0.22445	300	2.6388	2810.6	3074.5	8.2172
20	0.00100180	83.91	84.01	0.29616	310	2.6853	2826.2	3091.7	8.2520
25	0.00100296	104.82	104.92	0.36720	320	2.7317	2841.7	3114.9	8.2861
30	0.00100437	125.72	125.82	0.43673	330	2.7782	2857.3	3135.1	8.3202
35	0.00100600	146.62	146.72	0.50510	340	2.8246	2873.0	3155.5	8.3536
40	0.00100785	167.52	167.62	0.57237	350	2.8710	2888.7	3175.8	8.3866
45	0.00100988	188.41	188.51	0.63858	360	2.9173	2904.6	3196.3	8.4191
50	0.00101211	209.32	209.42	0.70377	370	2.9637	2920.6	3216.7	8.4512
55	0.00101452	230.23	230.33	0.76798	380	3.0100	2936.3	3237.3	8.4829
60	0.00101709	251.15	251.25	0.83125	390	3.0564	2952.3	3257.9	8.5142
65	0.00101981	272.08	272.18	0.89361	400	3.1027	2968.3	3278.6	8.5452
70	0.00102271	293.02	293.12	0.95509	410	3.1490	2984.4	3299.3	8.5757
75	0.00102581	313.98	314.08	1.01557	420	3.1953	3000.6	3320.1	8.6059
80	0.00102903	334.95	335.05	1.0755	430	3.2416	3016.7	3341.0	8.6358
85	0.00103241	355.95	356.05	1.1346	440	3.2879	3033.1	3361.9	8.6653
90	0.00103594	376.96	377.06	1.1928	450	3.3342	3049.4	3382.8	8.6946
95	0.00103962	398.00	398.10	1.2504	460	3.3805	3065.8	3403.9	8.7235
99.606	0.00104315	417.40	417.50	1.3028	470	3.4267	3082.3	3425.0	8.7521
99.606	1.6939	2505.5	2674.9	7.3588	480	3.4730	3098.9	3446.2	8.7804
100	1.6959	2506.2	2675.8	7.3610	490	3.5193	3115.5	3467.4	8.8084
105	1.7204	2544.1	2686.1	7.3885	500	3.5655	3132.1	3488.7	8.8361
110	1.7447	2521.8	2696.3	7.4155	520	3.6580	3165.8	3531.6	8.8908
115	1.7690	2529.6	2706.5	7.4418	540	3.7505	3199.6	3574.7	8.9445
120	1.7932	2537.3	2716.6	7.4678	560	3.8430	3233.7	3618.0	8.9972
125	1.8172	2545.0	2726.7	7.4932	580	3.9355	3268.2	3661.7	9.0489
130	1.8412	2552.6	2736.7	7.5183	600	4.0279	3302.8	3705.6	9.0998
135	1.8652	2560.2	2746.7	7.5429	620	4.1203	3337.8	3749.8	9.1499
140	1.8891	2567.8	2756.7	7.5672	640	4.2127	3373.0	3794.3	9.1991
145	1.9129	2575.4	2766.7	7.5911	660	4.3052	3408.5	3839.0	9.2476
150	1.9367	2582.9	2776.6	7.6148	680	4.3976	3444.2	3884.0	9.2954
155	1.9604	2590.5	2786.5	7.6380	700	4.4900	3480.4	3929.1	9.3424
160	1.9841	2598.1	2796.4	7.6610	720	4.5824	3516.8	3975.0	9.3888
165	2.0077	2605.5	2806.3	7.6838	740	4.6747	3553.4	4020.9	9.4345
170	2.0313	2613.1	2816.2	7.7062	760	4.7671	3590.3	4067.0	9.4797
175	2.0549	2620.6	2826.1	7.7284	780	4.8595	3627.6	4113.5	9.5242
180	2.0785	2628.1	2836.0	7.7503	800	4.9519	3665.0	4160.2	9.5684
185	2.1020	2635.6	2845.8	7.7719	820	5.0443	3702.8	4207.2	9.6115
190	2.1255	2643.1	2855.7	7.7934	840	5.1366	3740.8	4254.5	9.6544
195	2.1490	2650.7	2865.6	7.8146	860	5.2290	3779.2	4302.1	9.6968
200	2.1724	2658.3	2875.5	7.8356	880	5.3213	3817.8	4349.9	9.7386
210	2.2193	2673.3	2895.2	7.8769	900	5.4137	3856.6	4398.0	9.7800
220	2.2661	2688.4	2915.0	7.9171	920	5.5061	3895.8	4446.1	9.8209
230	2.3128	2703.5	2934.8	7.9572	940	5.5984	3935.2	4495.0	9.8613
240	2.3595	2718.7	2954.6	7.9962	960	5.6908	3974.8	4543.9	9.9013
250	2.4062	2733.9	2974.5	8.0346	980	5.7831	4014.8	4593.1	9.9408
260	2.4528	2749.1	2994.4	8.0723	1000	5.8754	4055.1	4642.6	9.9800
270	2.4993	2764.3	3014.3	8.1091					

Water/Steam at $p = 0.30$ MPa ($T_{sat} = 133.522^\circ\text{C}$)

T °C	ρ m ³ /kg	u kJ/kg	h kJ/kg	s kJ/kg K	T °C	ρ m ³ /kg	u kJ/kg	h kJ/kg	s kJ/kg K
0	0.001000006	-0.01	0.25	-0.00013	270	0.82810	2760.1	3008.5	7.5943
5	0.001000091	21.01	21.32	0.07625	280	0.81888	2775.6	3028.8	7.6314
10	0.001000176	42.02	42.31	0.15106	290	0.80962	2791.3	3049.2	7.6678
15	0.001000261	62.97	63.27	0.22412	300	0.80034	2807.0	3069.6	7.7037
20	0.001000346	83.87	84.19	0.29612	310	0.80101	2822.7	3090.0	7.7398
25	0.001000431	104.80	105.10	0.36715	320	0.80167	2838.4	3110.4	7.7758
30	0.001000516	125.70	126.00	0.43666	330	0.80233	2854.1	3130.9	7.8080
35	0.001000601	146.60	146.90	0.50533	340	0.80298	2870.0	3151.4	7.8417
40	0.001000686	167.49	167.79	0.57229	350	0.80363	2885.9	3172.0	7.8750
45	0.001000771	188.39	188.69	0.63849	360	0.80428	2901.8	3192.6	7.9078
50	0.001000856	209.29	209.59	0.70388	370	0.80493	2917.8	3213.2	7.9401
55	0.001000941	230.20	230.50	0.76838	380	0.80558	2933.8	3233.9	7.9721
60	0.001001026	251.11	251.42	0.83114	390	0.80623	2949.9	3254.7	8.0036
65	0.001001111	272.03	272.34	0.89350	400	0.80688	2966.1	3275.5	8.0347
70	0.001001196	292.98	293.29	0.95497	410	0.80753	2982.2	3296.3	8.0655
75	0.001001281	313.93	314.24	1.01564	420	0.80818	2998.4	3317.2	8.0959
80	0.001001366	334.89	335.20	1.07544	430	0.80883	3014.7	3338.2	8.1256
85	0.001001451	355.89	356.20	1.13444	440	0.80948	3031.1	3359.2	8.1546
90	0.001001536	376.91	377.22	1.1927	450	0.81013	3047.5	3380.3	8.1839
95	0.001001621	397.94	398.25	1.2504	460	0.81078	3064.0	3401.4	8.2127
100	0.001001706	419.01	419.32	1.3077	470	0.81143	3080.5	3422.6	8.2411
105	0.001001791	440.10	440.41	1.3633	480	0.81208	3097.2	3443.9	8.2711
110	0.001001876	461.21	461.53	1.4187	490	0.81273	3114.0	3465.2	8.3027
115	0.001001961	482.32	482.69	1.4736	500	0.81338	3130.6	3486.6	8.3271
120	0.001002046	503.50	503.88	1.5278	510	0.81403	3147.2	3508.1	8.3519
125	0.001002131	524.80	525.12	1.5815	520	0.81468	3163.8	3529.8	8.3767
130	0.001002216	546.08	546.40	1.6346	530	0.81533	3180.5	3551.6	8.4016
135	0.001002301	567.34	567.66	1.6871	540	0.81598	3197.2	3573.5	8.4264
140	0.001002386	588.59	588.91	1.7391	550	0.81663	3214.0	3595.5	8.4512
145	0.001002471	609.82	610.14	1.7906	560	0.81728	3230.8	3617.6	8.4760
150	0.001002556	631.04	631.36	1.8416	570	0.81793	3247.6	3639.8	8.5008
155	0.001002641	652.24	652.56	1.8921	580	0.81858	3264.5	3662.1	8.5256
160	0.001002726	673.43	673.75	1.9421	590	0.81923	3281.4	3684.5	8.5504
165	0.001002811	694.60	694.92	1.9916	600	0.81988	3298.4	3707.0	8.5752
170	0.001002896	715.76	716.08	2.0406	610	0.82053	3315.4	3729.6	8.6000
175	0.001002981	736.91	737.23	2.0891	620	0.82118	3332.4	3752.3	8.6248
180	0.001003066	758.04	758.36	2.1371	630	0.82183	3349.4	3775.1	8.6496
185	0.001003151	779.16	779.48	2.1846	640	0.82248	3366.4	3798.0	8.6744
190	0.001003236	800.27	800.59	2.2316	650	0.82313	3383.4	3821.0	8.6992
195	0.001003321	821.37	821.69	2.2781	660	0.82378	3400.4	3844.1	8.7240
200	0.001003406	842.46	842.78	2.3241	670	0.82443	3417.4	3867.2	8.7488
205	0.001003491	863.54	863.86	2.3696	680	0.82508	3434.4	3890.4	8.7736
210	0.001003576	884.61	884.93	2.4146	690	0.82573	3451.4	3913.7	8.7984
215	0.001003661	905.67	905.99	2.4591	700	0.82638	3468.4	3937.1	8.8232
220	0.001003746	926.72	927.04	2.5031	710	0.82703	3485.4	3960.6	8.8480
225	0.001003831	947.76	948.08	2.5466	720	0.82768	3502.4	3984.2	8.8728
230	0.001003916	968.79	969.11	2.5896	730	0.82833	3519.4	4007.8	8.8976
235	0.001004001	989.81	990.13	2.6321	740	0.82898	3536.4	4031.5	8.9224
240	0.001004086	1010.82	1011.14	2.6741	750	0.82963	3553.4	4055.3	8.9472
245	0.001004171	1031.82	1032.14	2.7156	760	0.83028	3570.4	4079.2	8.9720
250	0.001004256	1052.81	1053.13	2.7566	770	0.83093	3587.4	4103.2	8.9968
255	0.001004341	1073.79	1074.11	2.7971	780	0.83158	3604.4	4127.3	9.0216
260	0.001004426	1094.76	1095.08	2.8371	790	0.83223	3621.4	4151.5	9.0464
265	0.001004511	1115.72	1116.04	2.8766	800	0.83288	3638.4	4175.8	9.0712
270	0.001004596	1136.67	1136.99	2.9156	810	0.83353	3655.4	4200.2	9.0960
275	0.001004681	1157.61	1157.93	2.9541	820	0.83418	3672.4	4224.7	9.1208
280	0.001004766	1178.54	1178.86	2.9921	830	0.83483	3689.4	4249.2	9.1456
285	0.001004851	1199.46	1199.78	3.0296	840	0.83548	3706.4	4273.8	9.1704
290	0.001004936	1220.37	1220.69	3.0666	850	0.83613	3723.4	4298.4	9.1952
295	0.001005021	1241.27	1241.59	3.1031	860	0.83678	3740.4	4323.1	9.2200
300	0.001005106	1262.16	1262.48	3.1391	870	0.83743	3757.4	4347.8	9.2448
305	0.001005191	1283.04	1283.36	3.1746	880	0.83808	3774.4	4372.6	9.2696
310	0.001005276	1303.91	1304.23	3.2096	890	0.83873	3791.4	4397.4	9.2944
315	0.001005361	1324.78	1325.10	3.2441	900	0.83938	3808.4	4422.2	9.3192
320	0.001005446	1345.64	1345.96	3.2781	910	0.84003	3825.4	4447.1	9.3440
325	0.001005531	1366.49	1366.81	3.3116	920	0.84068	3842.4	4472.0	9.3688
330	0.001005616	1387.33	1387.65	3.3446	930	0.84133	3859.4	4497.0	9.3936
335	0.001005701	1408.16	1408.48	3.3771	940	0.84198	3876.4	4522.0	9.4184
340	0.001005786	1428.98	1429.30	3.4091	950	0.84263	3893.4	4547.0	9.4432
345	0.001005871	1449.79	1450.11	3.4406	960	0.84328	3910.4	4572.0	9.4680
350	0.001005956	1470.59	1470.91	3.4716	970	0.84393	3927.4	4597.0	9.4928
355	0.001006041	1491.38	1491.70	3.5021	980	0.84458	3944.4	4622.0	9.5176
360	0.001006126	1512.16	1512.48	3.5321	990	0.84523	3961.4	4647.0	9.5424
365	0.001006211	1532.93	1533.25	3.5616	1000	0.84588	3978.4	4672.0	9.5672

Water/Steam at $p = 4.0$ MPa ($T_{sat} = 250.354^\circ\text{C}$)

T °C	ρ m ³ /kg	u kJ/kg	h kJ/kg	s kJ/kg K	T °C	ρ m ³ /kg	u kJ/kg	h kJ/kg	s kJ/kg K
0	0.00097819	0.03	4.02	0.00009	270	0.0536930	2636.1	2871.2	6.2016
5	0.00097813	21.00	21.39	0.07617	280	0.0531970	2650.9	2902.9	6.2595
10	0.00097807	41.92	42.31	0.15072	290	0.0527170	2670.1	2933.9	6.3133
15	0.00097801	62.80	63.20	0.22385	300	0.0522500	2700.2	2961.7	6.3639
20	0.00097795	83.67	84.07	0.29564	310	0.0517940	2730.5	2989.4	6.4118
25	0.00097789	104.52	104.92	0.36619	320	0.0513450	2760.8	3016.6	6.4576
30	0.00097783	125.36	125.76	0.43553	330	0.0509000	2791.1	3043.2	6.5014
35	0.00097777	146.20	146.60	0.50371	340	0.0504600	2821.4	3069.3	6.5435
40	0.00097771	167.04	167.44	0.57085	350	0.0500250	2851.7	3094.9	6.5843
45	0.00097765	187.89	188.29	0.63691	360	0.0495950	2882.0	3120.1	6.6238
50	0.00097759	208.74	209.14	0.70190	370	0.0491700	2912.3	3144.9	6.6621
55	0.00097753	229.59	229.99	0.76601	380	0.0487500	2942.6	3169.3	6.6991
60	0.00097747	250.44	250.84	0.82918	390	0.0483350	2972.9	3193.3	6.7348
65	0.00097741	271.29	271.69	0.89141	400	0.0479250	3003.2	3216.9	6.7693
70	0.00097735	292.14	292.54	0.95277	410	0.0475200	3033.5	3240.1	6.8027
75	0.00097729	312.99	313.39	1.01333	420	0.0471200	3063.8	3262.9	6.8351
80	0.00097723	333.84	334.24	1.07300	430	0.0467250	3094.1	3285.3	6.8665
85	0.00097717	354.69	355.09	1.13189	440	0.0463350	3124.4	3307.3	6.8970
90	0.00097711	375.54	375.94	1.19000	450	0.0459500	3154.7	3328.9	6.9266
95	0.00097705	396.39	396.79	1.24735	460	0.0455700	3185.0	3350.1	6.9553
100	0.00097699	417.24	417.64	1.30392	470	0.0451950	3215.3	3370.9	6.9831
105	0.00097693	438.09	438.49	1.35971	480	0.0448250	3245.6	3391.3	7.0101
110	0.00097687	458.94	459.34	1.41472	490	0.0444600	3275.9	3411.3	7.0363
115	0.00097681	479.79	480.19	1.46895	500	0.0441000	3306.2	3430.9	7.0617
120	0.00097675	500.64	501.04	1.52240	510	0.0437450	3336.5	3450.1	7.0863
125	0.00097669	521.49	521.89	1.57507	520	0.0433950	3366.8	3468.9	7.1101
130	0.00097663	542.34	542.74	1.62696	530	0.0430500			

Section : B

- Q.5 (a) A hollow shaft of outside diameter 60 mm and inside diameter 0.4 times the outside diameter, is subjected to a torque of T (Nm) and a bending moment of $0.5T$ (Nm). The tensile yield stress of the shaft material is 260 MPa. For the given application, taking factor of safety to be 2, what will be the maximum permissible value of T to avoid failure according to Tresca's failure theory?

[12 marks]


$$D_o = 60 \text{ mm}$$

$$D_i = 24 \text{ mm}$$

$$\sigma_y = 260 \text{ MPa}$$

$$n = 2$$

12

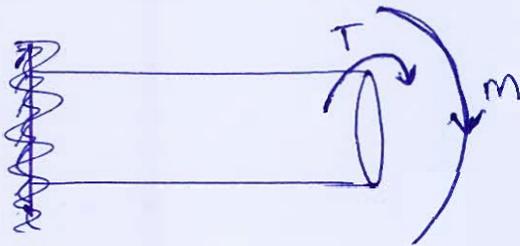

$$\tau_{xy} = \frac{16 T}{\pi d^3 (1 - k^4)}$$

$$k = \frac{D_i}{D_o}$$

$$\tau_{xy} = \frac{16 T}{\pi (60)^3 (1 - 0.4^4)} = 2.42 \times 10^{-5} T = x$$

$$\sigma_x = \frac{32 (0.5T)}{\pi (60)^3 (1 - 0.4^4)} = 2.42 \times 10^{-5} T = x$$

$$\sigma_1, \sigma_2 = \frac{\sigma_x}{2} \pm \sqrt{\left(\frac{\sigma_x}{2}\right)^2 + (\tau_{xy})^2}$$

$$= \frac{x}{2} \pm \sqrt{\frac{x^2}{4} + x^2}$$

$$= \frac{x}{2} \pm \sqrt{\frac{5}{4}} x$$

$$\sigma_1 = \left(\frac{1}{2} + \sqrt{\frac{5}{4}}\right) x \quad \sigma_2 = \left(\frac{1}{2} - \sqrt{\frac{5}{4}}\right) x$$

$$\sigma_1 = 3.916 \times 10^{-5} T \quad \sigma_2 = -1.496 \times 10^{-5} T$$

Acc to Tresca's failure theory

$$\tau_{max} = \frac{\sigma_1 - \sigma_2}{2} \leq \left(\frac{\sigma_y - 0}{2n}\right)$$


$$5.412 \times 10^{-5} T \leq \frac{260}{2}$$

$$T \leq 24.02 \times 10^5 \text{ N}\cdot\text{mm}$$

$$T \leq 2402.07 \text{ N}\cdot\text{m}$$

→ max permissible value of T .

- Q.5 (b) A rope is looped over two fixed posts each of 24 cm diameter as shown in figure below. If the coefficient of friction $\mu = \frac{7}{8\pi}$, then determine the maximum and minimum values of P that will prevent the motion of the load $W = 7 \text{ kN}$.

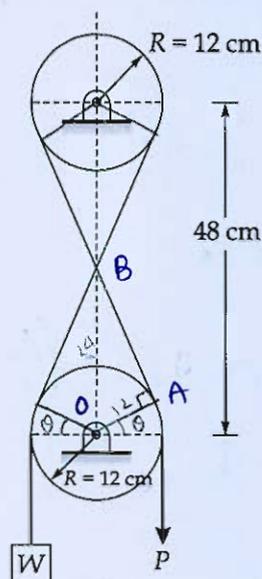


12

[12 marks]

from the $\triangle OAB$, from above figure.
 $OA = 12 \text{ cm}$ (Radius of fixed post)
 $OB = 24 \text{ cm}$

$$\cos(\angle BOA) = \frac{OA}{OB} = \frac{12}{24}$$

$$\angle BOA = 60^\circ = \frac{\pi}{3}$$

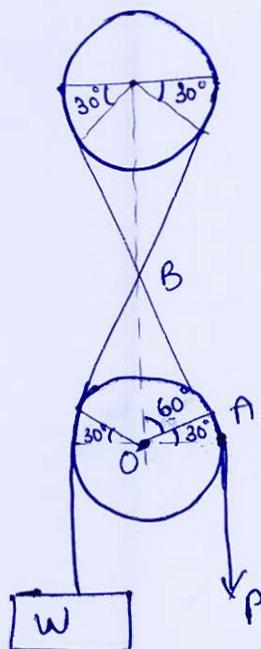

Total angle of wrap by the rope
over fixed posts = $180^\circ + 30^\circ + 30^\circ$
 $+ 30^\circ + 30^\circ$
 $= 300^\circ$

$$\theta_{\text{wrap}} = 300 \times \frac{\pi}{180} = \frac{5}{3} \pi$$

$$W = 7 \text{ kN}$$

for P to be maximum

$$\frac{P}{W} = e^{\mu \theta_{\text{wrap}}} = e^{\frac{7}{8\pi} \times \frac{5\pi}{3}} = e^{35/24}$$

$$P = 7 \text{ kN} \cdot e^{35/24}$$

$$P_{\text{max}} = 30.09 \text{ kN}$$

for P to be minimum

$$\frac{W}{P} = e^{35/24}$$

$$P_{\text{min}} = 1.628 \text{ kN}$$

- Q.5 (c) Two pieces of materials A and B have the same bulk modulus, but the Young's modulus of B is 2% greater than that for A. Obtain the value of modulus of rigidity for the material B in terms of Young's modulus and modulus of rigidity for material A.

[12 marks]

Given, $k_A = k_B \rightarrow \textcircled{1}$ $E_B = 1.02 E_A \rightarrow \textcircled{2}$

~~$2 \times G (1 + \nu)$~~

$$E = \frac{9KG}{3K+G} \rightarrow \textcircled{a}$$

from $\textcircled{2}, \textcircled{a} \Rightarrow$ $\frac{9K_B G_B}{3K_B + G_B} = 1.02 \frac{9K_A G_A}{3K_A + G_A}$

$$G_B = \frac{1.02 G_A (3K_B + G_B)}{3K_A + G_A}$$

$$G_B = \frac{1.02 G_A}{3K_A + G_A} (3K_A) + \frac{1.02 G_A}{(3K_A + G_A)} (G_B)$$

$$(G_B) - \frac{1.02 G_A}{(3K_A + G_A)} (G_B) = \frac{1.02 G_A \times 3 K_A}{(3K_A + G_A)}$$

$$G_B \left[\frac{3K_A + G_A - 1.02 G_A}{(3K_A + G_A)} \right] = \frac{3.06 G_A K_A}{(3K_A + G_A)}$$

$$G_B = \frac{3.06 G_A K_A}{3K_A - 0.02 G_A}$$


$G_B \rightarrow$ rigidity modulus of B.

$G_A \rightarrow$ " " " A.

$K \rightarrow$ Bulk modulus

$E \rightarrow$ Youngs modulus.

- Q.5 (d) Determine the centroid of the area under the curve $y = a \cos\left(\frac{\pi x}{2b}\right)$ between $x = 0$ and $x = b$ as shown in figure below.

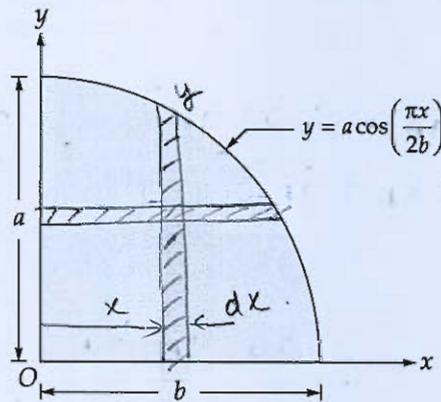

[12 marks]

$$x_c = \frac{\int_0^b y \cdot x \cdot dx}{\int_0^b y \cdot dx}$$

$$x_c = \frac{\int_0^b a \cos\left(\frac{\pi x}{2b}\right) x \cdot dx}{\int_0^b a \cos\left(\frac{\pi x}{2b}\right) \cdot dx} \rightarrow (i)$$

Denominator of (i)

$$\int_0^b a \cos\left(\frac{\pi x}{2b}\right) \cdot dx$$

$$= a \left[\frac{\sin\left(\frac{\pi x}{2b}\right)}{\frac{\pi}{2b}} \right]_0^b$$

$$= \frac{2ab}{\pi} [1 - 0]$$

$$= \frac{2ab}{\pi} \rightarrow \textcircled{1}$$

8

Numerator of (i)

$$\int_0^b a \cos\left(\frac{\pi x}{2b}\right) x \cdot dx.$$

$$\text{let } \theta = \frac{\pi x}{2b} \quad x = \frac{2b}{\pi} \theta.$$

$$dx = \frac{2b}{\pi} d\theta.$$

$$= a \times \left(\frac{2b}{\pi}\right)^2 \int_0^{\frac{\pi}{2}} \cos\theta \times \theta \cdot d\theta.$$

$$\int \theta \cos\theta \cdot d\theta$$

$$u \int \cos\theta \cdot d\theta - \int \cos\theta \cdot du$$

$$= \frac{a 4b^2}{\pi^2} \left[\theta \sin\theta - (-\cos\theta) \right]_0^{\frac{\pi}{2}}$$

$$= \frac{4ab^2}{\pi^2} \left[\theta \sin\theta + \cos\theta \right]_0^{\frac{\pi}{2}}$$

$$= \frac{4ab^2}{\pi^2} \left[\frac{\pi}{2} - 1 \right] \quad \text{--- (2)}$$

$$x_c = \frac{\frac{4ab^2}{\pi^2} \left(\frac{\pi}{2} - 1 \right)}{\frac{2ab}{\pi}}$$

$$\frac{\frac{4ab^2}{\pi^2} \left(\frac{\pi}{2} - 1 \right)}{\frac{2ab}{\pi}} = \frac{2b}{\pi} \left(\frac{\pi}{2} - 1 \right)$$

$$x_c = \frac{2b}{\pi} \left(\frac{\pi}{2} - 1 \right)$$

$$x_c = b \left(1 - \frac{2}{\pi} \right)$$

- Q.5 (e) A copper cylinder 945 mm long, 420 mm internal diameter and 10 mm thickness with flat ends, is initially full of oil at atmospheric pressure. Calculate the volume of oil which must be pumped into the cylinder in order raise the pressure to 6 MPa above atmospheric pressure. For copper, take $E = 100$ GPa and $\mu = 0.3$. Take bulk modulus of oil as 2600 MPa. Neglect the deformation of the end plates.

[12 marks]

- Q.6 (a) (i) A seamless spherical shell is of 87.5 cm internal diameter and 6 mm thickness. It is filled with fluid under pressure until its volume increases by 64 cm^3 . Calculate the fluid pressure by taking $E = 205 \text{ GPa}$ and Poisson's ratio = 0.32.
- (ii) A body is under action of two principal stresses of 50 MPa and -80 MPa and the third principle stress being zero. The elastic limit in simple tension and compression is 210 MPa. Calculate the factor of safety based on the elastic limit according to
- (1) Maximum shear stress theory
 - (2) Maximum strain energy theory
 - (3) Maximum shear strain energy theory
- Take poisson's ratio as 0.25.

[8 + 12 marks]


(i) $D_i = 87.5 \text{ cm} = 875 \text{ mm}$

$t = 6 \text{ mm}$

8

$\frac{D_i}{t} = 145.83 > 20 \rightarrow$ Thin ~~plate~~ sp. shell.

let P be pressure of fluid.



$$\sigma(\pi dt) = P \frac{\pi}{4} d^2$$

$$\sigma = \frac{Pd}{4t} = \frac{P \times 875}{4 \times 6}$$

$$\sigma_h = 36.4583 P$$

$$\epsilon_n = \frac{\delta d}{d} = \frac{1}{E} (\sigma_h - \mu \sigma_h)$$

$$= \frac{1}{205 \times 10^3} (\sigma_h - 0.32 \sigma_h)$$

$$\frac{\delta d}{d} = \frac{0.68 \times 36.4583 P}{205 \times 10^3}$$

$$\epsilon_v = \frac{\delta V}{V} = 3 \times \epsilon_n = \frac{3 \times 0.68 \times 36.4583 P}{205 \times 10^3}$$

$$\frac{64 \times 10^3}{\frac{4}{3} \pi \left(\frac{875}{2}\right)^3} = \left[\frac{3 \times 0.68 \times 36.4583}{205 \times 10^3} \right] P$$

fluid pressure. \rightarrow $P = 0.5029 \text{ mPa}$

(ii)

$$\sigma_1 = 50$$

$$\sigma_2 = -80$$

$$\sigma_3 = 0$$

$$\sigma_y = 210 \text{ mPa}$$

$n =$ factor of safety

(i) MSS T

$$\left(\frac{\sigma_1 - \sigma_2}{2} \right) = \left(\frac{\sigma_y}{n} \right)$$

$$130 = \frac{210}{n}$$

$$n = \frac{210}{130}$$

$$n = 1.6154$$

(2) max. strain Energy theory.

$$\frac{1}{2E} (\sigma_1^2 + \sigma_2^2 - 2\mu\sigma_1\sigma_2) = \frac{1}{2E} \left(\frac{\sigma_y}{n} \right)^2$$

$$50^2 + (-80)^2 - 2(0.25)(50)(-80) = \left(\frac{210}{n} \right)^2$$

$$104.403 = \frac{210}{n}$$

$$n = 2.0114$$

(3) maximum shear strain Energy theory.


$$\frac{1}{12G} [(\sigma_1 - \sigma_2)^2 + (\sigma_2 - \sigma_3)^2 + (\sigma_3 - \sigma_1)^2] = \frac{1}{12G} \left(2 \left(\frac{\sigma_y}{n} \right)^2 \right)$$

$$\sigma_3 = 0$$

$$\sigma_1^2 + \sigma_2^2 - \sigma_1\sigma_2 = \left(\frac{\sigma_y}{n} \right)^2$$


$$113.578 = \frac{210}{n}$$

$$n = 1.849$$

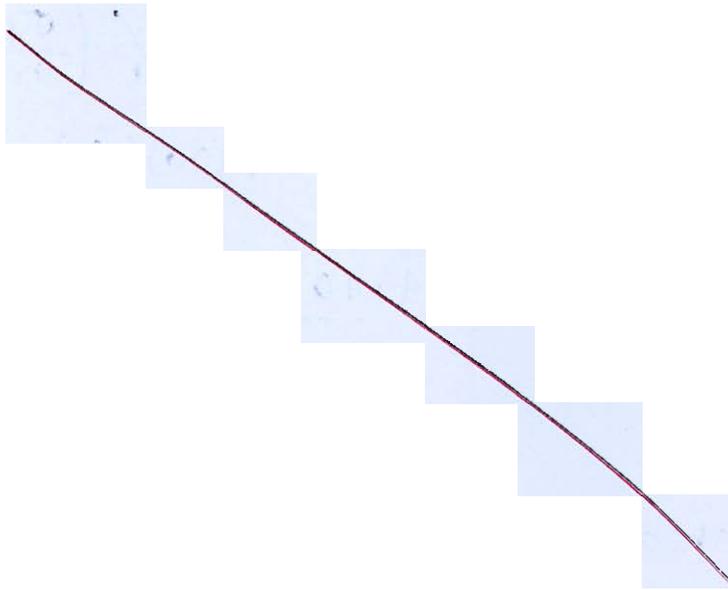

- Q.6 (b) A cantilever beam of length 'L' is loaded by a uniformly varying load, the load at free end is zero and maximum load of w at the fixed end. The free end is propped to the level of fixed end. Assuming EI to be constant, calculate the reaction at prop and equation to the elastic curve along with the slope at the propped end.

[20 marks]

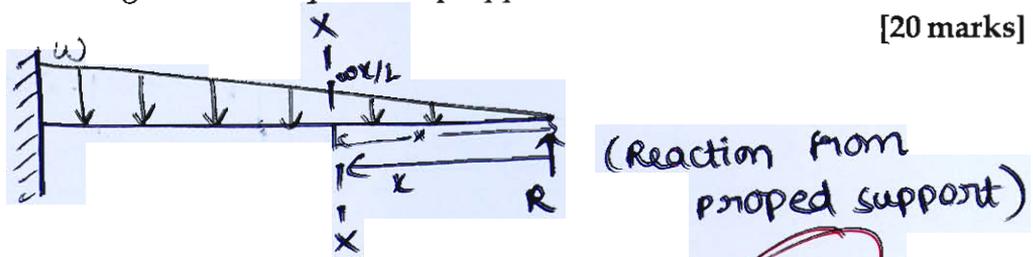

$$M_x = Rx - \frac{1}{2} \left(\frac{wx}{L} \right) x \left(\frac{x}{3} \right)$$

$$M_x = Rx - \frac{wx^3}{6L} \rightarrow \text{①}$$

$$EI \frac{d^2y}{dx^2} = M(x)$$

[Double integration method]

$$EI \frac{d^2y}{dx^2} = Rx - \frac{wx^3}{6L}$$

$$EI \frac{dy}{dx} = \frac{Rx^2}{2} - \frac{wx^4}{24L} + C_1$$

$$\text{at } x = L, \quad \frac{dy}{dx} = 0$$

$$0 = \frac{RL^2}{2} - \frac{WL^4}{24L} + C_1$$

$$C_1 = \frac{WL^3}{24} - \frac{RL^2}{2} \rightarrow \textcircled{1}$$

$$EI \cdot y = \frac{Rx^3}{6} - \frac{Wx^5}{120L} + C_1x + C_2 \quad \textcircled{a}$$

$$\text{at } x = L, \quad y = 0$$

$$0 = \frac{RL^3}{6} - \frac{WL^5}{120L} + C_1L + C_2$$

$$\frac{WL^4}{120} - \frac{RL^3}{6} - C_1L = C_2 \rightarrow \textcircled{2}$$

$$\frac{WL^4}{120} - \frac{RL^3}{6} - \left(\frac{WL^3}{24} - \frac{RL^2}{2} \right) L = C_2$$

$$\frac{WL^4}{120} - \frac{WL^4}{24} - \frac{RL^3}{6} + \frac{RL^3}{2} = C_2$$

$$-\frac{WL^4}{30} + \frac{RL^3}{3} = C_2 \rightarrow \textcircled{3}$$

$$\text{at } x = 0, \quad y = 0 \Rightarrow \text{from } \textcircled{a} \quad \boxed{C_2 = 0}$$

$$\frac{RL^3}{3} = \frac{WL^4}{30} \Rightarrow R = \frac{WL}{10}$$

① Reaction at the prop

$$\boxed{R = \frac{WL}{10}}$$

② slope at propped end ($x = 0$)

$$\frac{dy}{dx} = \frac{1}{EI} \quad C_1 = \left(\frac{WL^3}{24} - \frac{WL^3}{20} \right) \frac{1}{EI}$$

slope at propped end. $\leftarrow \frac{dy}{dx} = -\frac{1}{120} \left(\frac{wL^3}{EI} \right) \text{ (ACW)}$

Equation of elastic curve,

$$EI \cdot y = \frac{Rx^3}{6} - \frac{wx^5}{120L} + C_1x + C_2 \rightarrow 0$$


$$= \frac{wLx^3}{60} - \frac{wx^5}{120L} + \left(\frac{-wL^3}{120} \right) x$$


$$y = \frac{1}{EI} \left[\frac{wLx^3}{60} - \frac{wx^5}{120L} - \frac{wL^3}{120} x \right]$$

→ Equation of elastic curve.

- Q.6 (c) Two steel plugs fit freely into the ends of a steel tubular distance piece 420 mm long and drawn together by a steel bolt 520 mm long and nut, the nut being tight fit in the beginning. The nut is further tightened by $\frac{1}{5}$ turn to draw the pieces together, the pitch of the bolt thread being 2.5 mm. The pieces are then subjected to forces of 60 kN tending to pull them apart. The area of cross-section of the bolt is 700 mm² and that of the tube is 500 mm². Young's modulus of steel is 200 GPa. Calculate the stresses in the bolt and the tube.

[20 marks]

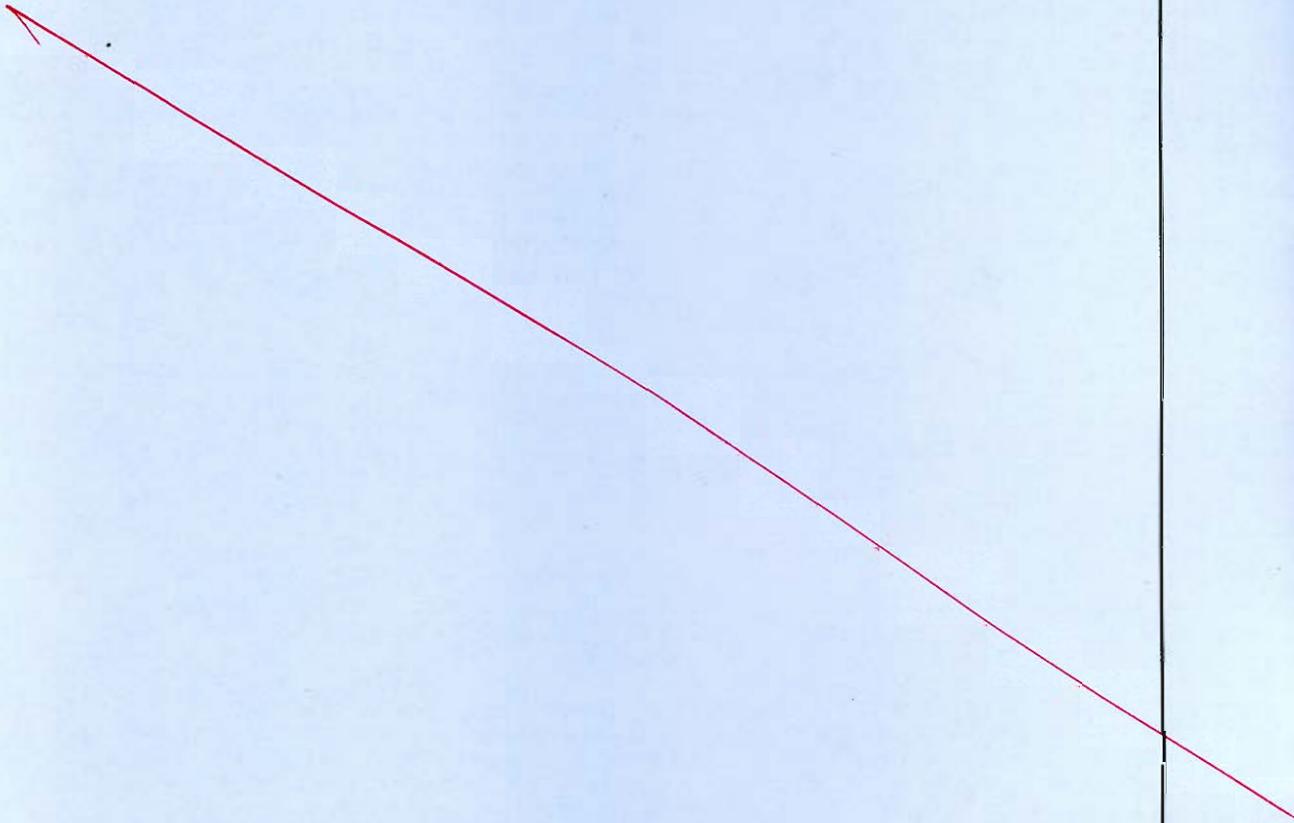

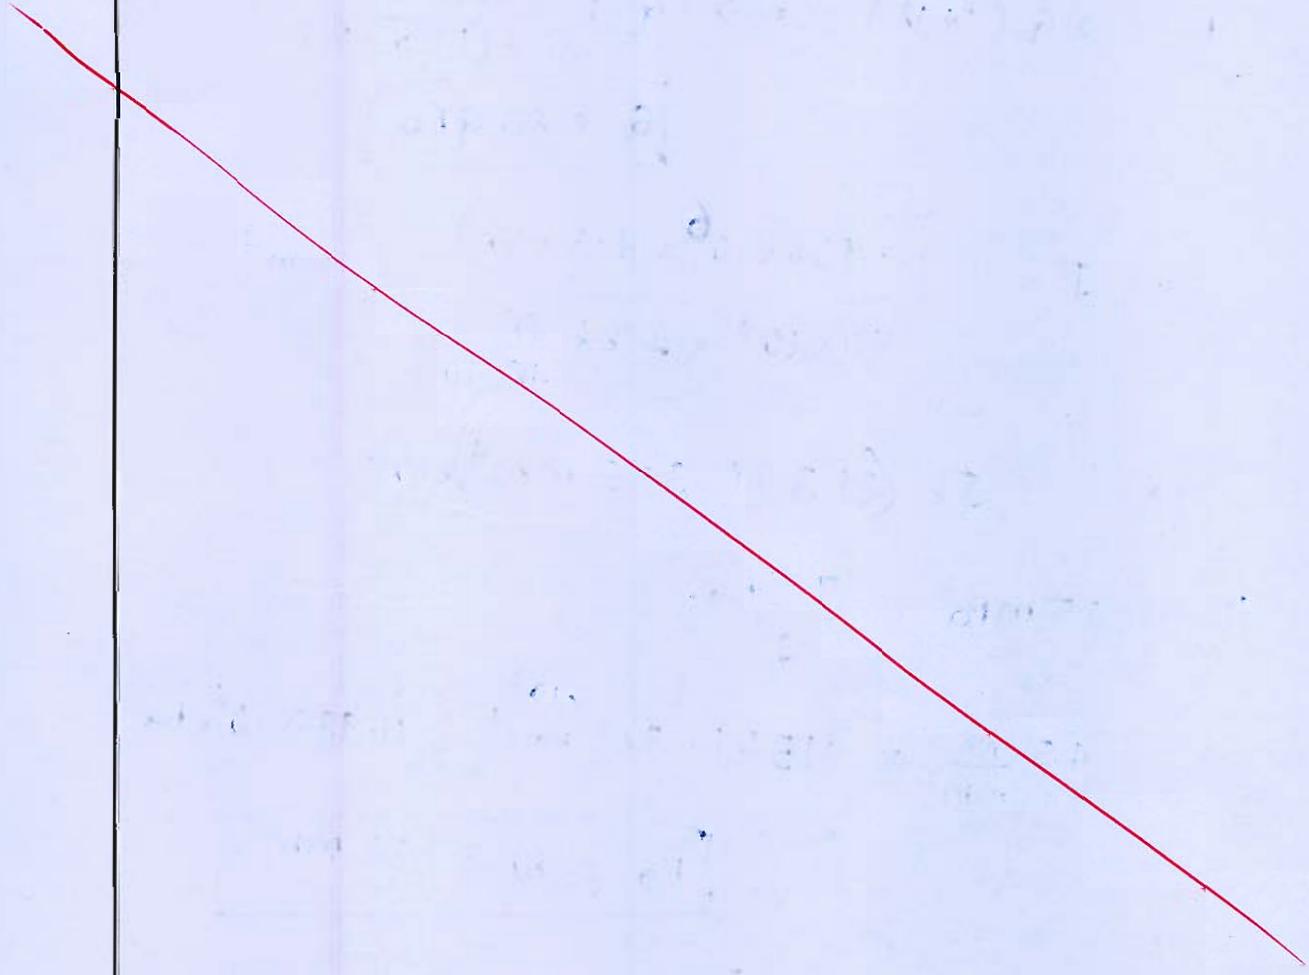

- Q.7 (a) A hollow steel shaft 4.5 m long is to transmit 150 kW of power at 120 rpm. The total angle of twist is not to exceed 1.8° in this length and the allowable shear stress is 45 MPa. Calculate the inside and outside diameters of the shaft. Assume modulus of elasticity as 200 GPa and Poisson's ratio as 0.25.

[20 marks]

$$L = 4.5 \text{ m}$$

$$P = 150 \text{ kW}$$

$$N = 120 \text{ rpm}$$

$$P = T \cdot \omega \rightarrow \textcircled{1}$$

$$\theta = \frac{TL}{GJ} \rightarrow \textcircled{2}$$



$$150 \frac{\text{kJ}}{\text{s}} = T \times \left(\frac{2\pi \times 120}{60} \right) \frac{\text{rad}}{\text{s}}$$

$$T = 11.936 \text{ kN}\cdot\text{m}$$

$$\frac{11.936 \times 10^6 \text{ N}\cdot\text{mm} \times 4.5 \times 10^3 \text{ mm}}{GJ} = 1.8 \times \frac{\pi}{180}$$

$$E = 2G(1+\nu) \Rightarrow G = \frac{200}{2(1+0.25)}$$

$$G = 80 \text{ GPa}$$

$$J = \frac{11.936 \times 10^6 \times 4.5 \times 10^3}{80 \times 10^3 \times 1.8 \times \frac{\pi}{180}} \text{ mm}^4$$

$$J = (21371.325 \text{ mm}^4) \times 10^3$$

$$\tau = 45 \text{ MPa} = \frac{T R_o}{J}$$

$$45 \frac{\text{N}}{\text{mm}^2} \times 21371.325 \times 10^3 \text{ mm}^4 = 11.936 \times 10^6 \times R_o$$

$$R_o = 80.5722 \text{ mm}$$

$$D_o = 161.1443 \text{ mm}$$

$$\frac{\pi}{32} (d_o^4 - d_i^4) = 21371325 \text{ mm}^4 = J$$

$$d_i^4 = -\frac{J \cdot 32}{\pi} + d_o^4$$


Inner dia
-meter

$$d_i = 146.18 \text{ mm}$$


outer diameter


$$D_o = 161.1443 \text{ mm}$$

- Q.7 (b) A wire length 30 cm is tied to point D on the surface of a sphere of radius 20 cm. Then the wire is tied to point C which is the intersection of two smooth walls, the walls being at right angles to each other as shown in figure below. If the weight of the sphere is 500 N, then determine the tension in the wire and the reactions from the wall. Assume all contact surface are smooth.

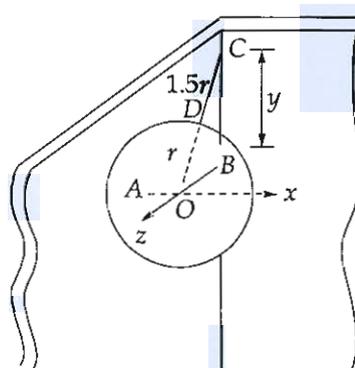


[20 marks]

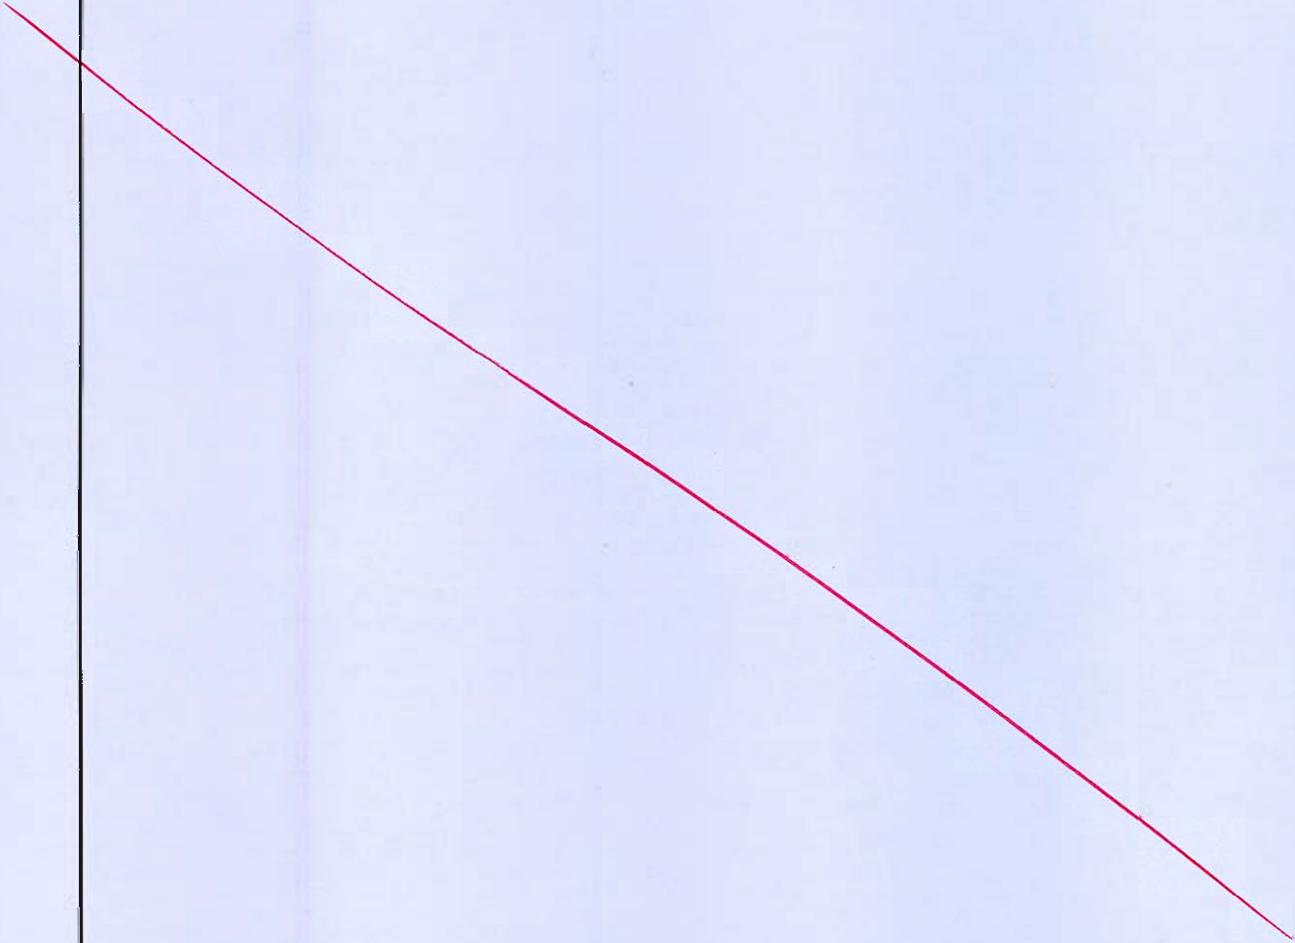

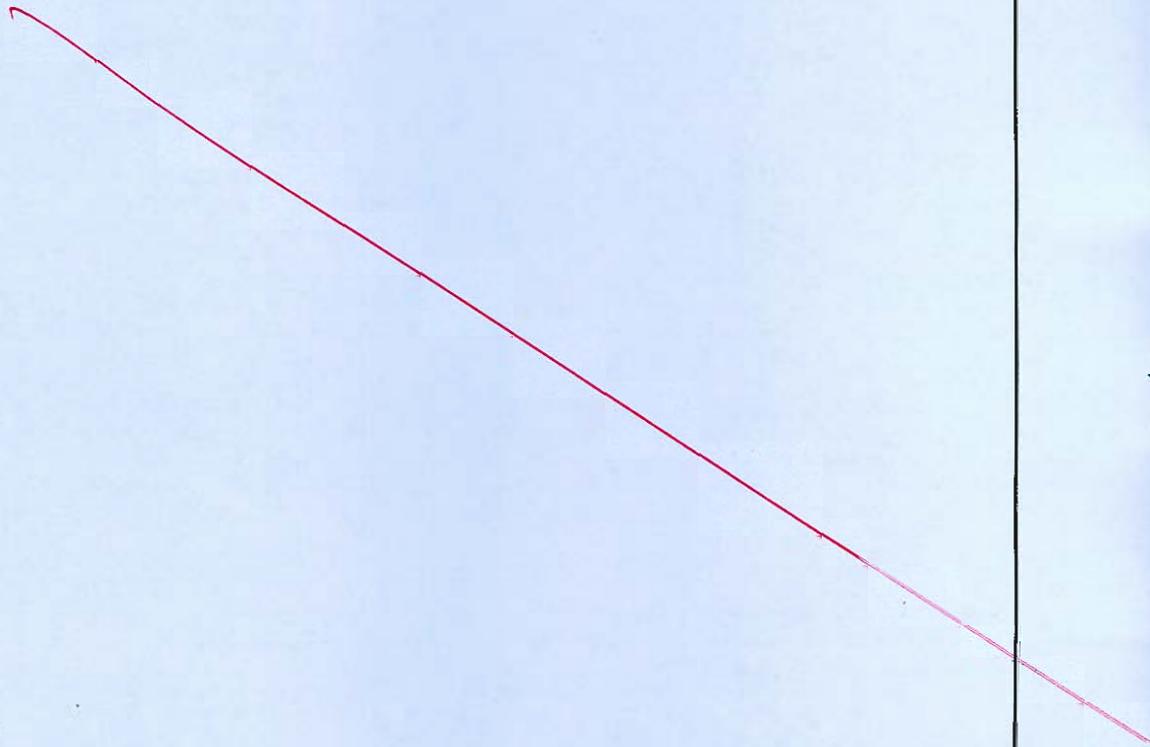


Q.7 (c) The compression flange of a cast iron girder is 140 mm and 20 mm deep, the tension flange 260 mm wide and 40 mm and the web 300 mm × 20 mm. Calculate the load per metre run which may be carried over a 5 m span by a beam simply supported at the ends, if maximum permissible stresses are 95 MPa in compression and 35 MPa in tension.


[20 marks]

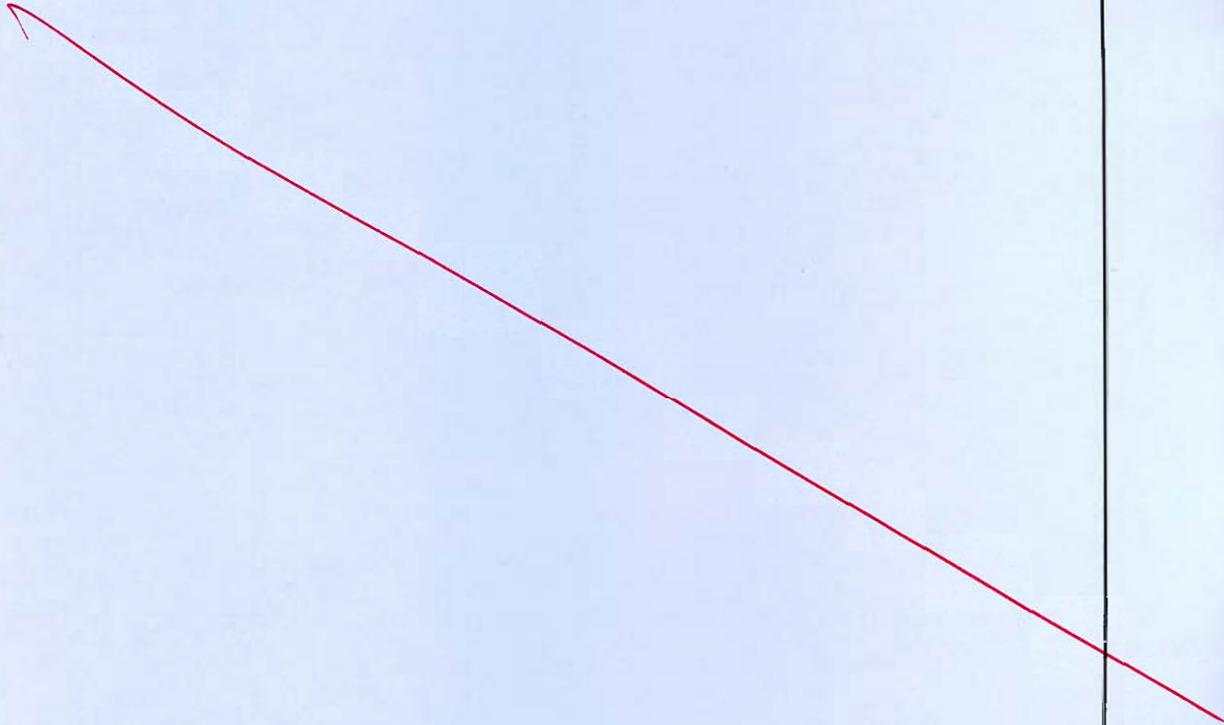



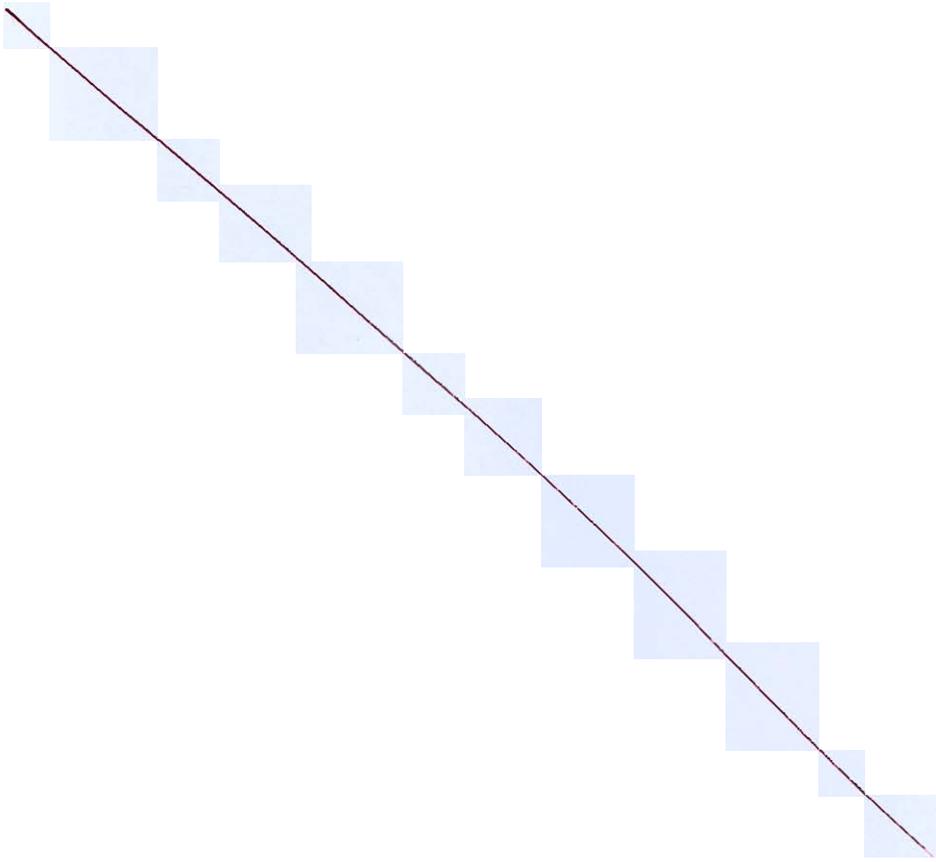

- Q.8 (a) (i) A block 'A' weighing 840 N is raised up with the help of two 8° wedge 'B' and 'C' of negligible weights as shown in figure. If the coefficient of static friction is 0.25 for all surfaces of contact, then evaluate the smallest force P to be applied to raise the block A
- (ii) A vehicle of mass 680 kg, is moving with a velocity 34 m/s. A force of 255 N acts on it for 3 minutes. Find the final velocity of the vehicle:
- (1) When the force acts in the direction of motion, and
 - (2) When the force acts in the opposite direction of the motion.
- Comment your view on final result.

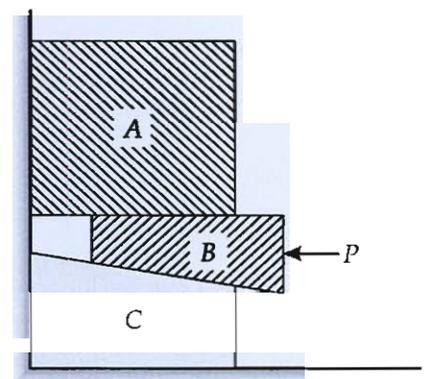

[14 +6 = 20 marks]

(ii) (1)

$$m = 680 \text{ kg}$$

$$F = 255 \text{ N}$$

$$a = 0.375 \text{ m/s}^2$$


$$t = 180 \text{ s}$$

$$v = u + at$$

$$v = 34 + 0.375(180)$$

$$v = 101.5 \text{ m/s}$$

$$\rightarrow u \quad \rightarrow v$$



Newton's second law
 $\Sigma F = ma$

~~101.5~~

(2)

when force acts opposite to the direction of motion.

$$v = u - at$$

$$v = -33.5 \text{ m/s}$$

when the force acts opposite to the direction of motion the vehicle decelerates and finally changes its direction and then increases its velocity from zero.

*Not considered
for evaluation.
Read instructions*

[Faint, illegible handwritten text, possibly bleed-through from the reverse side of the page.]

[Faint, illegible handwritten text, possibly bleed-through from the reverse side of the page.]




Q.8 (b) A gun metal bar of 30 mm diameter is completely enclosed in a steel tube, 30 mm internal diameter and 45 mm external diameter. A pin, 12 mm in diameter is fitted transversely to the axis of the bar near each end, to secure the bar to the tube. Calculate the intensity of stresses induced in bar, tube and pin, when the temperature of the whole assembly is raised by 42°C .

Take : For gun metal : $\alpha_g = 20 \times 10^{-6}/^{\circ}\text{C}$
 $E_g = 0.91 \times 10^5 \text{ N/mm}^2$
For Steel : $\alpha_B = 12 \times 10^{-6}/^{\circ}\text{C}$
 $E_s = 2 \times 10^5 \text{ N/mm}^2$


[20 marks]




- Q.8 (c) A simply supported beam with one side overhang is loaded with uniformly distributed load as shown in figure below. Comment your result on the variation of reaction forces at A and B, if ' L ' is less than, equal to and greater than ' a '. Draw shear force and bending moment diagram for $w = 4 \text{ kN/m}$, $L = 8 \text{ m}$ and $a = 4 \text{ m}$.

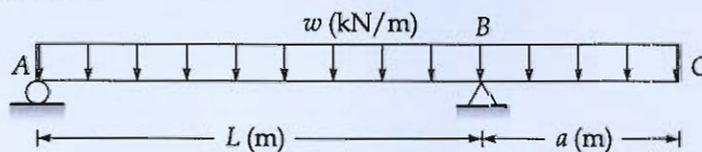

[20 marks]

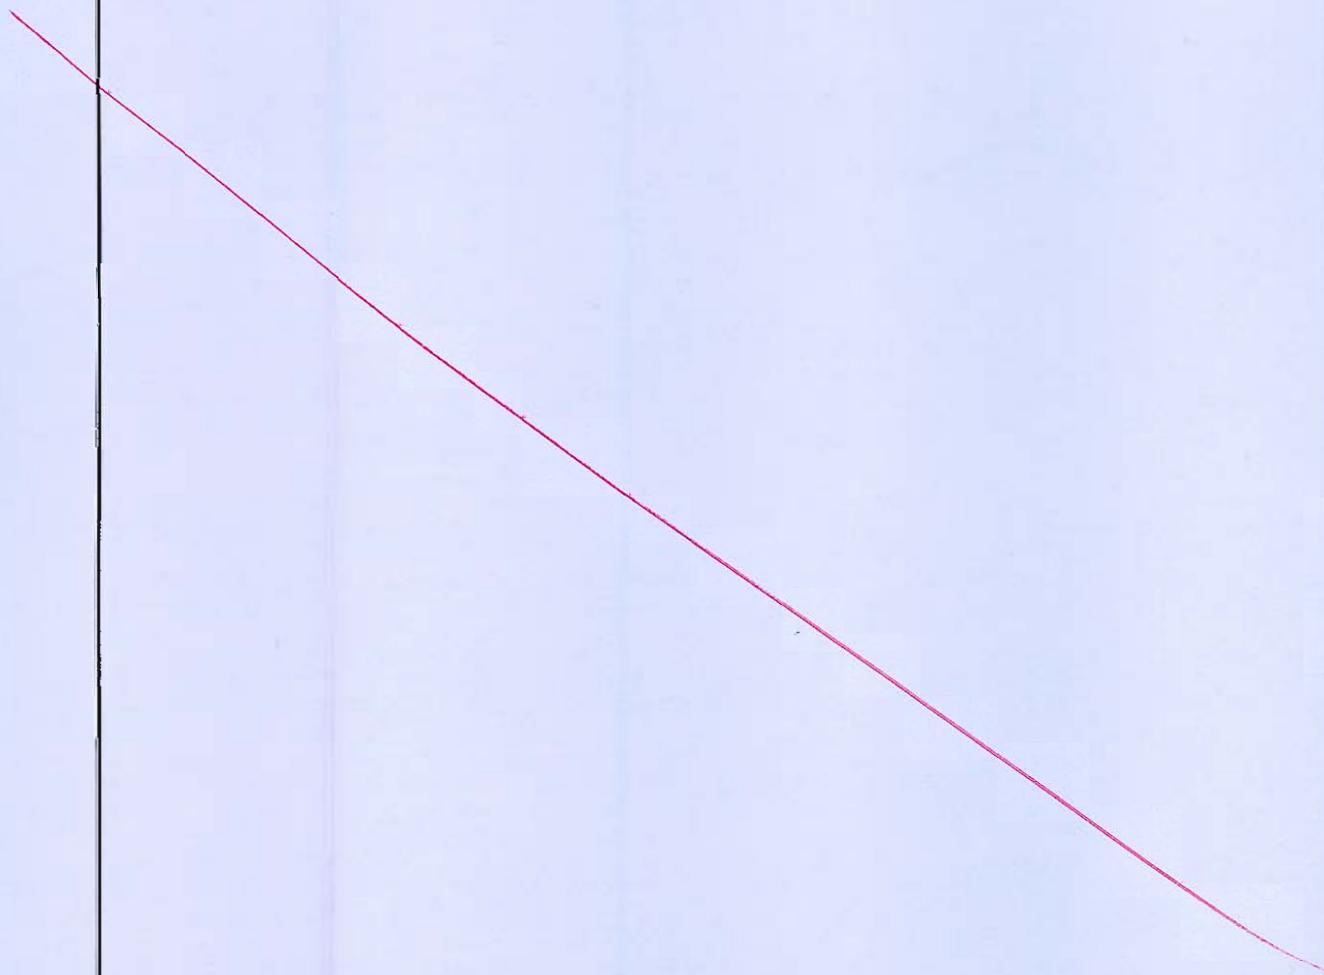

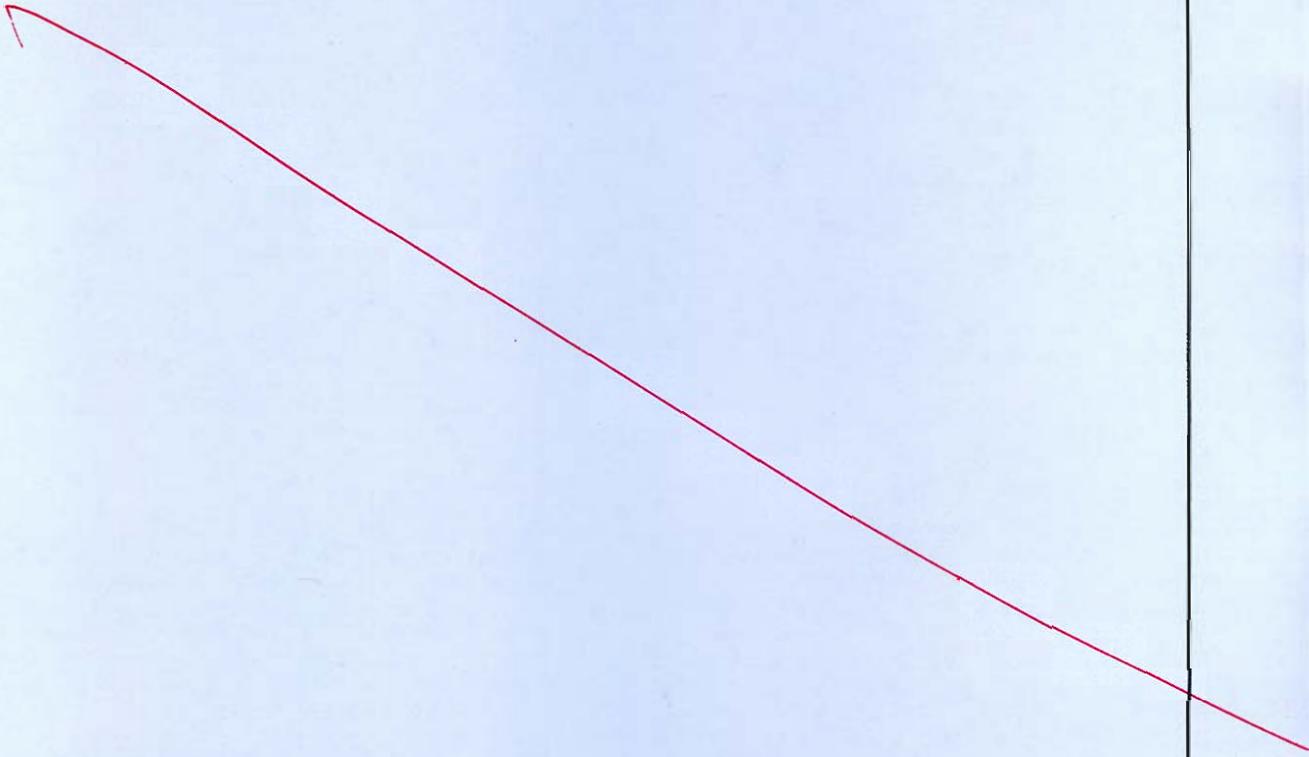

○○○○

Space for Rough Work

Space for Rough Work

Space for Rough Work

