



MADE EASY

India's Best Institute for IES, GATE & PSUs

ESE 2024 : Mains Test Series

UPSC ENGINEERING SERVICES EXAMINATION

Mechanical Engineering

Test-3 : Section A: Fluid Mechanics and Turbo Machinery [All Topics]

Section B : Heat Transfer-1 + Refrigeration and Air-Conditioning-1 [Part Syllabus]

Thermodynamics-2 + Strength of Materials & Mechanics-2 [Part Syllabus]

Name :

Roll No

Test Centres			Student's Signature
Delhi <input checked="" type="checkbox"/>	Bhopal <input type="checkbox"/>	Jaipur <input type="checkbox"/>	
Pune <input type="checkbox"/>	Kolkata <input type="checkbox"/>	Hyderabad <input type="checkbox"/>	

Instructions for Candidates

- Do furnish the appropriate details in the answer sheet (viz. Name & Roll No).
- There are Eight questions divided in TWO sections.
- Candidate has to attempt FIVE questions in all in English only.
- Question no. 1 and 5 are compulsory and out of the remaining THREE are to be attempted choosing at least ONE question from each section.
- Use only black/blue pen.
- The space limit for every part of the question is specified in this Question Cum Answer Booklet. Candidate should write the answer in the space provided.
- Any page or portion of the page left blank in the Question Cum Answer Booklet must be clearly struck off.
- There are few rough work sheets at the end of this booklet. Strike off these pages after completion of the examination.

FOR OFFICE USE

Question No.	Marks Obtained
Section-A	
Q.1	31
Q.2	—
Q.3	12
Q.4	—
Section-B	
Q.5	22
Q.6	32
Q.7	42
Q.8	—
Total Marks Obtained	139

Signature of Evaluator

Naveen

Cross Checked by

IMPORTANT INSTRUCTIONS

CANDIDATES SHOULD READ THE UNDERMENTIONED INSTRUCTIONS CAREFULLY. VIOLATION OF ANY OF THE INSTRUCTIONS MAY LEAD TO PENALTY.

DONT'S

1. Do not write your name or registration number anywhere inside this Question-cum-Answer Booklet (QCAB).
2. Do not write anything other than the actual answers to the questions anywhere inside your QCAB.
3. Do not tear off any leaves from your QCAB, if you find any page missing do not fail to notify the supervisor/invigilator.
4. Do not leave behind your QCAB on your table unattended, it should be handed over to the invigilator after conclusion of the exam.

DO'S


1. Read the Instructions on the cover page and strictly follow them.
2. Write your registration number and other particulars, in the space provided on the cover of QCAB.
3. Write legibly and neatly.
4. For rough notes or calculation, the last two blank pages of this booklet should be used. The rough notes should be crossed through afterwards.
5. If you wish to cancel any work, draw your pen through it or write "Cancelled" across it, otherwise it may be evaluated.
6. Handover your QCAB personally to the invigilator before leaving the examination hall.

#Comments:


- Representation is good.
- Most of the solution is attempted correctly but there is calculation mistakes.
- Improve accuracy.
- Attempt more such questions and improve accuracy & speed.

Section : A

- Q.1 (a) A sector gate in the form of circular arc of radius 5 m retains water to a height of 3 m above its sill as shown in figure. Calculate the magnitude and direction of the resultant force per unit length of the gate. Assume a gate width of 1 m.

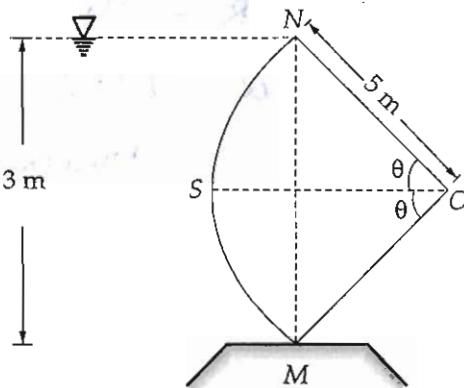

[12 marks]

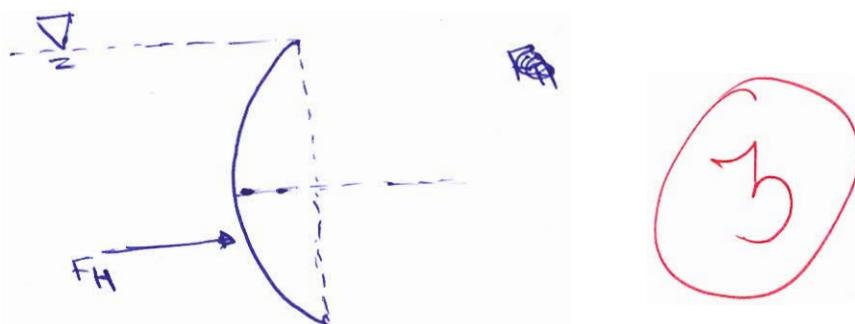

$$F_H = (\rho g \bar{x})_A = 9810(1.5) \left(\frac{2\theta}{360} + 2\pi r \right) \times 1$$

~~$$F_H = 94690.9373 \text{ N}$$~~


$F_V = \text{wt. of water displaced by arc } (NSMN)$

$$F_V = \rho g \left[\frac{2\theta}{360} (\pi R^2) - \frac{1}{2} \times 5^2 \sin(2\theta) \right] \times 1$$

~~$$\sin \theta = \frac{3}{5} \Rightarrow \theta = 36.8698$$~~

$$\sin 2\theta = 0.96$$

~~$$F_V = 40098.2289 \text{ N}$$~~

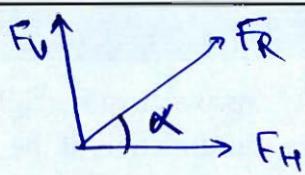

$$F_H = 94690.9373 \text{ N}$$

$$F_V = 40098.2289 \text{ N}$$


$$F_R = 102831.1313 \text{ N}$$

$$\text{at } \alpha = 22.95^\circ \text{ from Horizontal}$$

Refer Solution

- Q.1 (b)** With the aid of a schematic diagram, explain the working principle of pulse jet engine and also draw the ideal and actual P-V diagrams.

[12 marks]

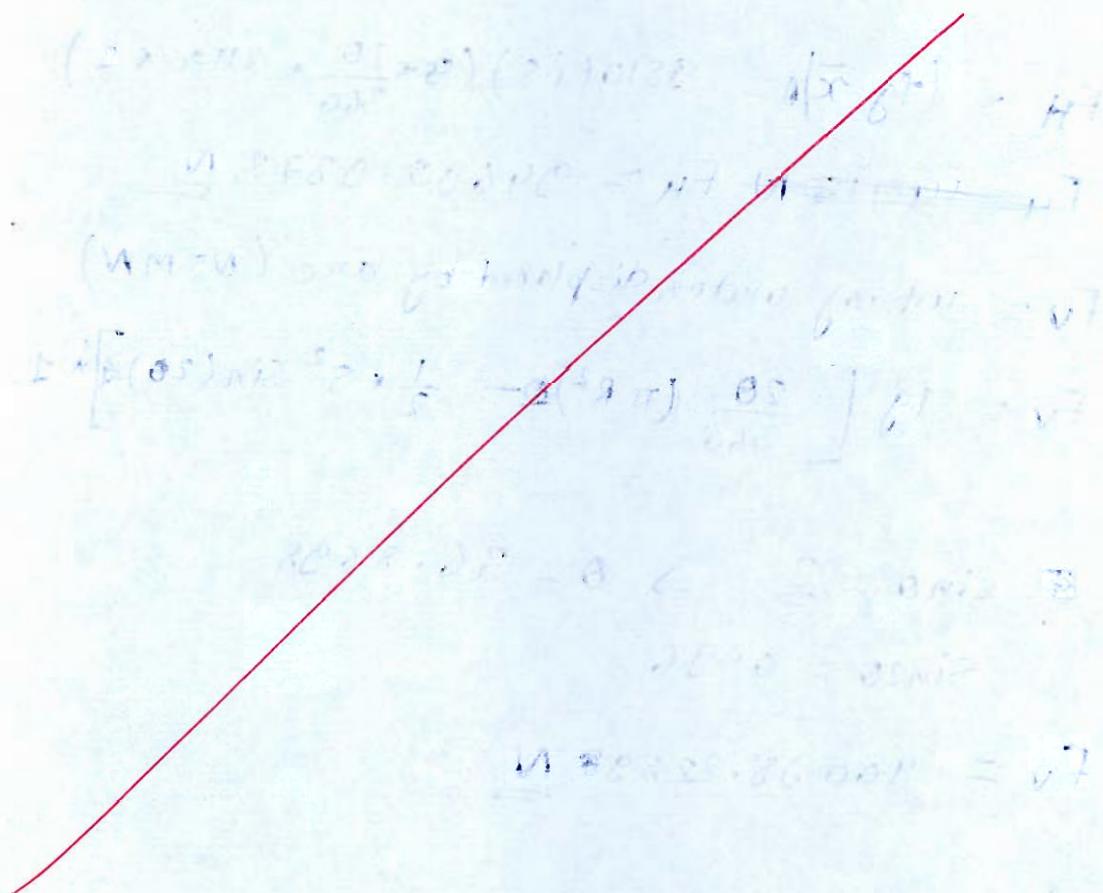


Top left point
Top right point
Bottom right point
Bottom left point
N

Angle - 15°

Top left point without top part
Top right point with bottom part
Bottom right point with top part
Bottom left point with both parts

Angle = 90°

D A C B

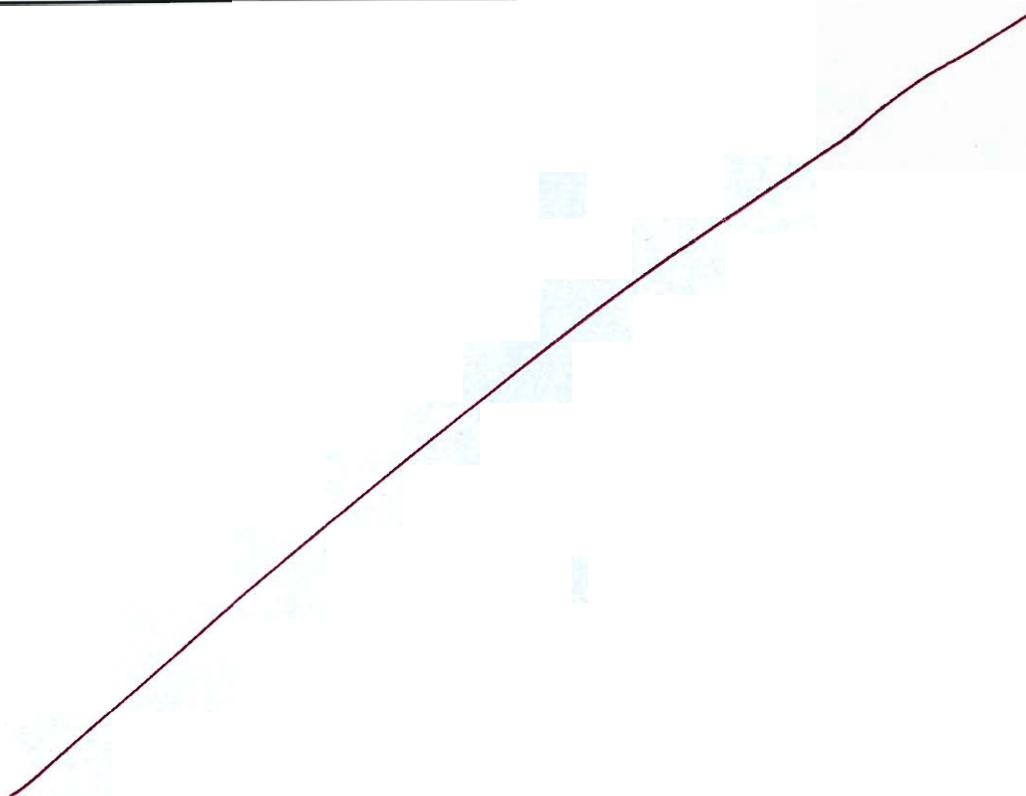

- Q.1 (c) A liquid jet issues out of a nozzle into atmosphere at an angle of 60° above the horizontal and with a velocity of 10 m/s. At the nozzle exit the jet has a diameter of 8 cm. Assuming the jet to be unbroken throughout the trajectory, determine
- the equation of the jet trajectory.
 - the maximum height attained by the jet and its size at that location.

[12 marks]

$$A_{\text{nozzle}} = \frac{\pi}{4} (0.08)^2$$

$$= 5.0265 \times 10^{-3} \text{ m}^2$$

$$u = 10 \text{ m/s.}$$



Eqn of motion in y-dirn.

~~$v_y = u_y + a_y t$~~

~~$\Rightarrow 0 = u \sin 60^\circ - g t$~~

$$t = \frac{u \sin 60^\circ}{g}$$

$$t = \frac{u \sin \theta}{g} \quad \text{--- (1)}$$

16



Now, eqn of motion in x -dirn.

$$\text{Sx} = ux t + \frac{1}{2} ax t^2$$

$$x = u \cos \theta t$$

$$\Rightarrow t = \frac{x}{u \cos \theta}$$

Now, eqn of motion in y -dirn.

$$Sy = uy t + \frac{1}{2} ay t^2$$

$$y = u \sin \theta \cdot \frac{x}{u \cos \theta} + -\frac{1}{2} g \left(\frac{x^2}{u^2 \cos^2 \theta} \right)$$

$$y = x \tan \theta - \frac{g x^2 \sec^2 \theta}{2 u^2}$$

eqn of trajectory.

$$y = 1.732 x - 0.1962 x^2$$

$$\text{i)} y_{\max} \Rightarrow \frac{dy}{dx} = 0 = 1.732 - 2(0.1962) x$$

$$\Rightarrow x = 4.41383$$

$$y_{\max} = 3.8224 \text{ m}$$

at max height $v_y = 0$

$$\therefore m = \rho A u_x = 1000 \times 5.0625 \times 10^{-3} \times 10 \cos 60^\circ$$

$$m = 25.3125 \text{ kg/s}$$


$$dx = ??$$

Incomplete Solution

Q.1 (d)

A single acting reciprocating pump has its piston executing a simple harmonic motion. Show that the ratio of the work done against friction when the air vessels are fitted to that in the absence of air vessels is $3/2\pi^2$.

[12 marks]

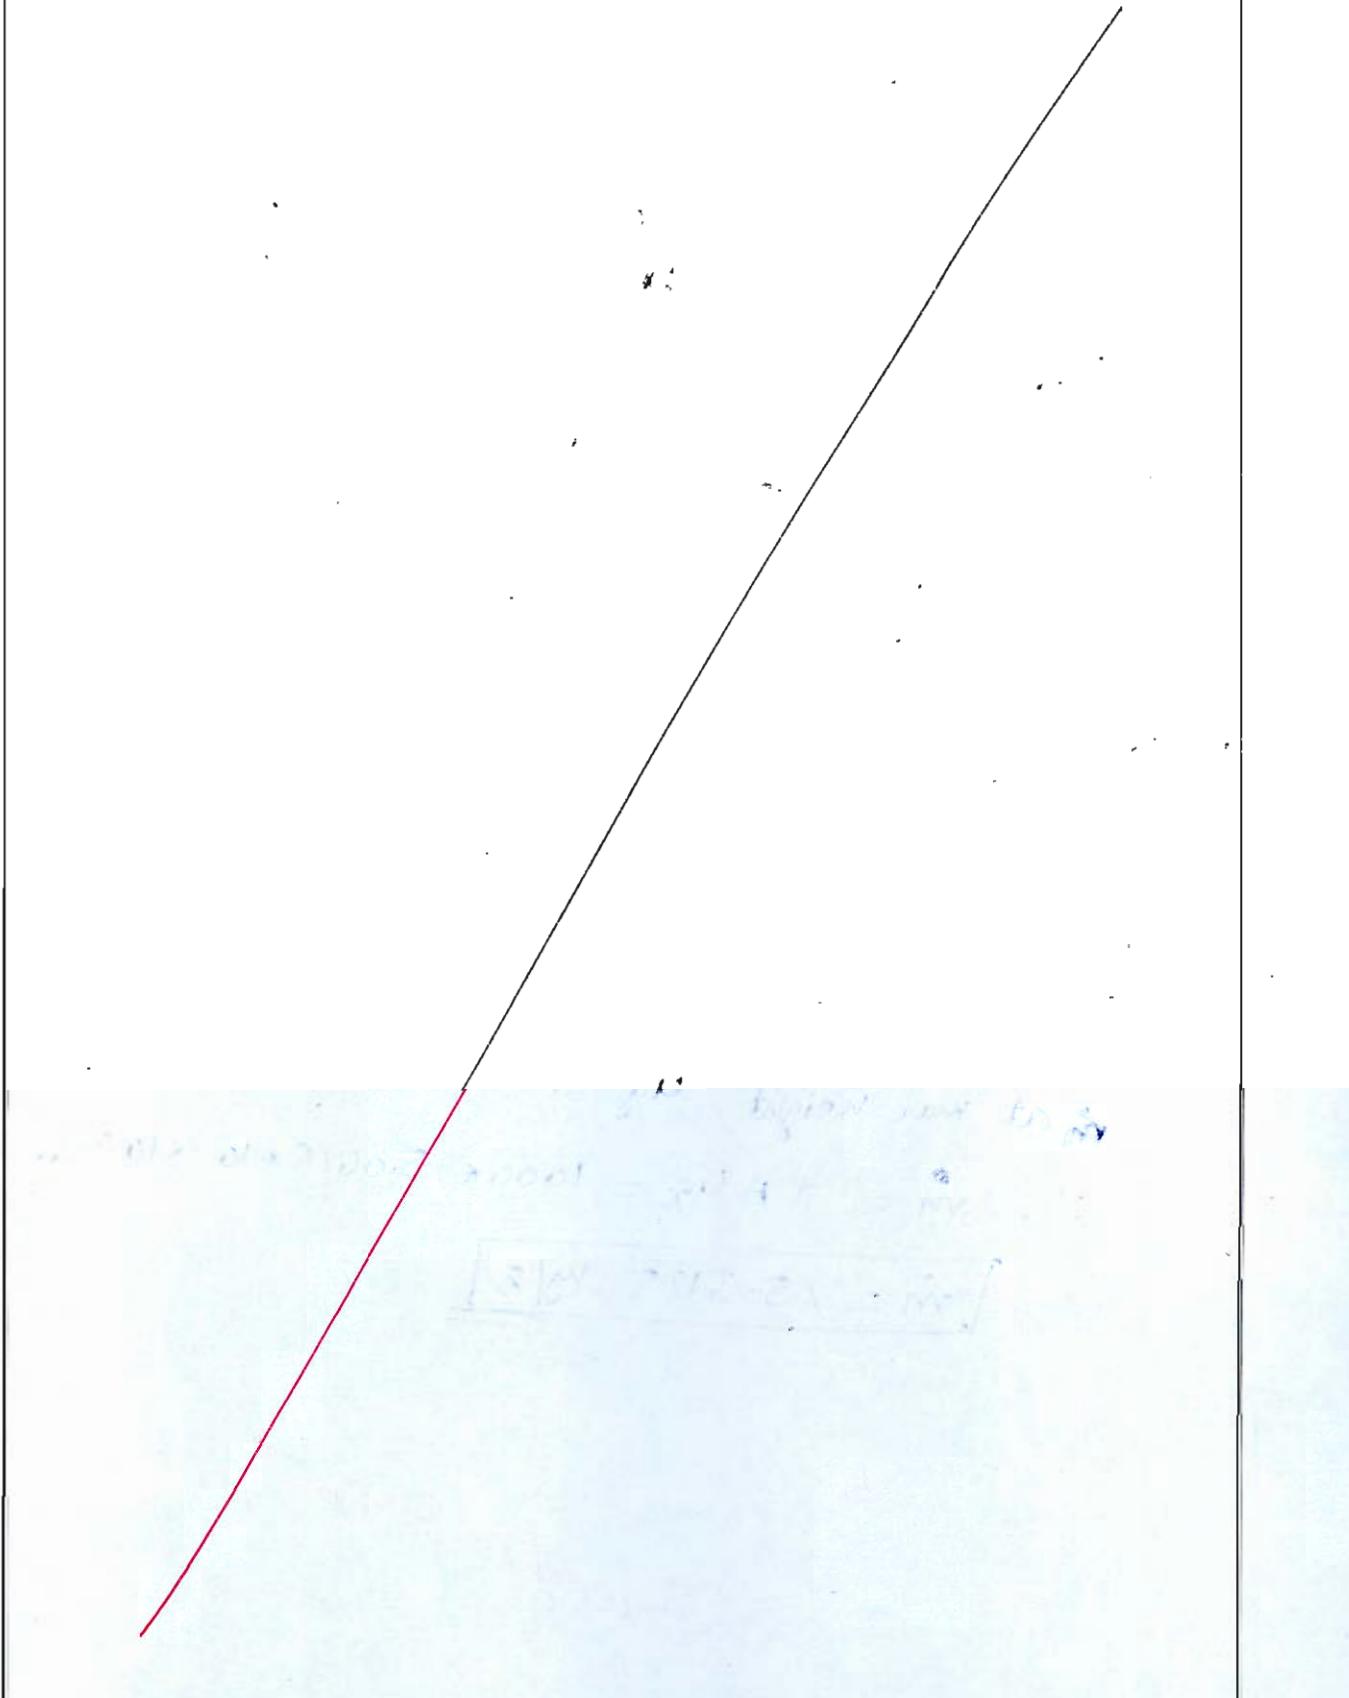

First we will consider the case of a rectangular loop of side a and b .
Let us take the loop to be in the xy -plane with its vertices at $(0,0)$, $(a,0)$, (a,b) and $(0,b)$.
The magnetic field at a point (x,y) due to a current element dI at (x_0, y_0) is given by the formula

$$\frac{\mu_0}{4\pi} \frac{dI}{\sqrt{(x-x_0)^2 + (y-y_0)^2}}$$

where μ_0 is the magnetic permeability of free space. The total magnetic field at (x,y) is the vector sum of the fields due to all the four sides of the rectangle. The field due to the top side is

$$\frac{\mu_0}{4\pi} \frac{dI}{\sqrt{(x-a)^2 + (y-0)^2}} = \frac{\mu_0}{4\pi} \frac{dI}{\sqrt{x^2 - 2ax + a^2 + y^2}}$$

The field due to the bottom side is

$$\frac{\mu_0}{4\pi} \frac{dI}{\sqrt{(x-a)^2 + (y-b)^2}} = \frac{\mu_0}{4\pi} \frac{dI}{\sqrt{x^2 - 2ax + a^2 + y^2 - 2by + b^2}}$$

The field due to the left side is

$$\frac{\mu_0}{4\pi} \frac{dI}{\sqrt{(x-0)^2 + (y-b)^2}} = \frac{\mu_0}{4\pi} \frac{dI}{\sqrt{x^2 + y^2 - 2by + b^2}}$$

The field due to the right side is

$$\frac{\mu_0}{4\pi} \frac{dI}{\sqrt{(x-0)^2 + (y-0)^2}} = \frac{\mu_0}{4\pi} \frac{dI}{\sqrt{x^2 + y^2}}$$

Q.1 (e)

Examine whether or not the following velocity profiles satisfy the essential boundary conditions for velocity distribution in laminar boundary layer on a flat plate.

$$(i) \frac{U}{U_0} = 1 + \left(\frac{y}{\delta}\right) - 2\left(\frac{y}{\delta}\right)^2$$

$$(ii) \frac{U}{U_0} = \sin\left(\frac{\pi y}{2\delta}\right)$$

where u is the velocity at height y above the surface, U_0 is the free stream velocity and δ is the nominal boundary layer thickness.

Essential boundary conditions in Laminar boundary layer on a flat plate are.

[12 marks]

a) $y=0, u=0$ (No slip condition)

b) $y=\delta, \cancel{u=U_0}$

c) $y=\delta, \frac{du}{dy} = 0$

i) $\frac{U}{U_0} = 1 + \left(\frac{y}{\delta}\right) - 2\left(\frac{y}{\delta}\right)^2$

at $y=0, u=U_0 \therefore$ It does not satisfy the boundary condition.

12

ii) $\frac{U}{U_0} = \sin\left(\frac{\pi y}{2\delta}\right)$

a) at $y=0, u=0$,

b) at $y=\delta, u=U_0$

c) $\frac{du}{dy} = U_0 \cos\left(\frac{\pi y}{2\delta}\right) + \cancel{\frac{\pi}{2\delta}}$

at $y=\delta, \frac{du}{dy} = U_0 \cos\left(\frac{\pi}{2\delta} \times \delta\right) + \frac{\pi}{2\delta} = 0$

Hence it satisfies all three essential boundary conditions.


✓


Q.2 (a)

A Pelton wheel has 4 nozzles each 52 mm in diameter with coefficient of velocity 0.98. Bucket speed is 0.46 times the jet speed and bucket mean diameter is 0.85 m. Reduction in relative velocity due to bucket friction is 16% with jet deflection of 165° and having mechanical efficiency of 94%. The water is supplied through a pipeline 360 m long from a reservoir, the level of which is 300 m above the nozzles. If the friction coefficient is 0.0058 and the head lost in friction amounts to 32 m. Calculate :

- (i) the diameter of the pipeline,
- (ii) the bucket power, hydraulic and overall efficiencies of the wheel,
- (iii) the unit speed, the unit power and specific speed.


[20 marks]

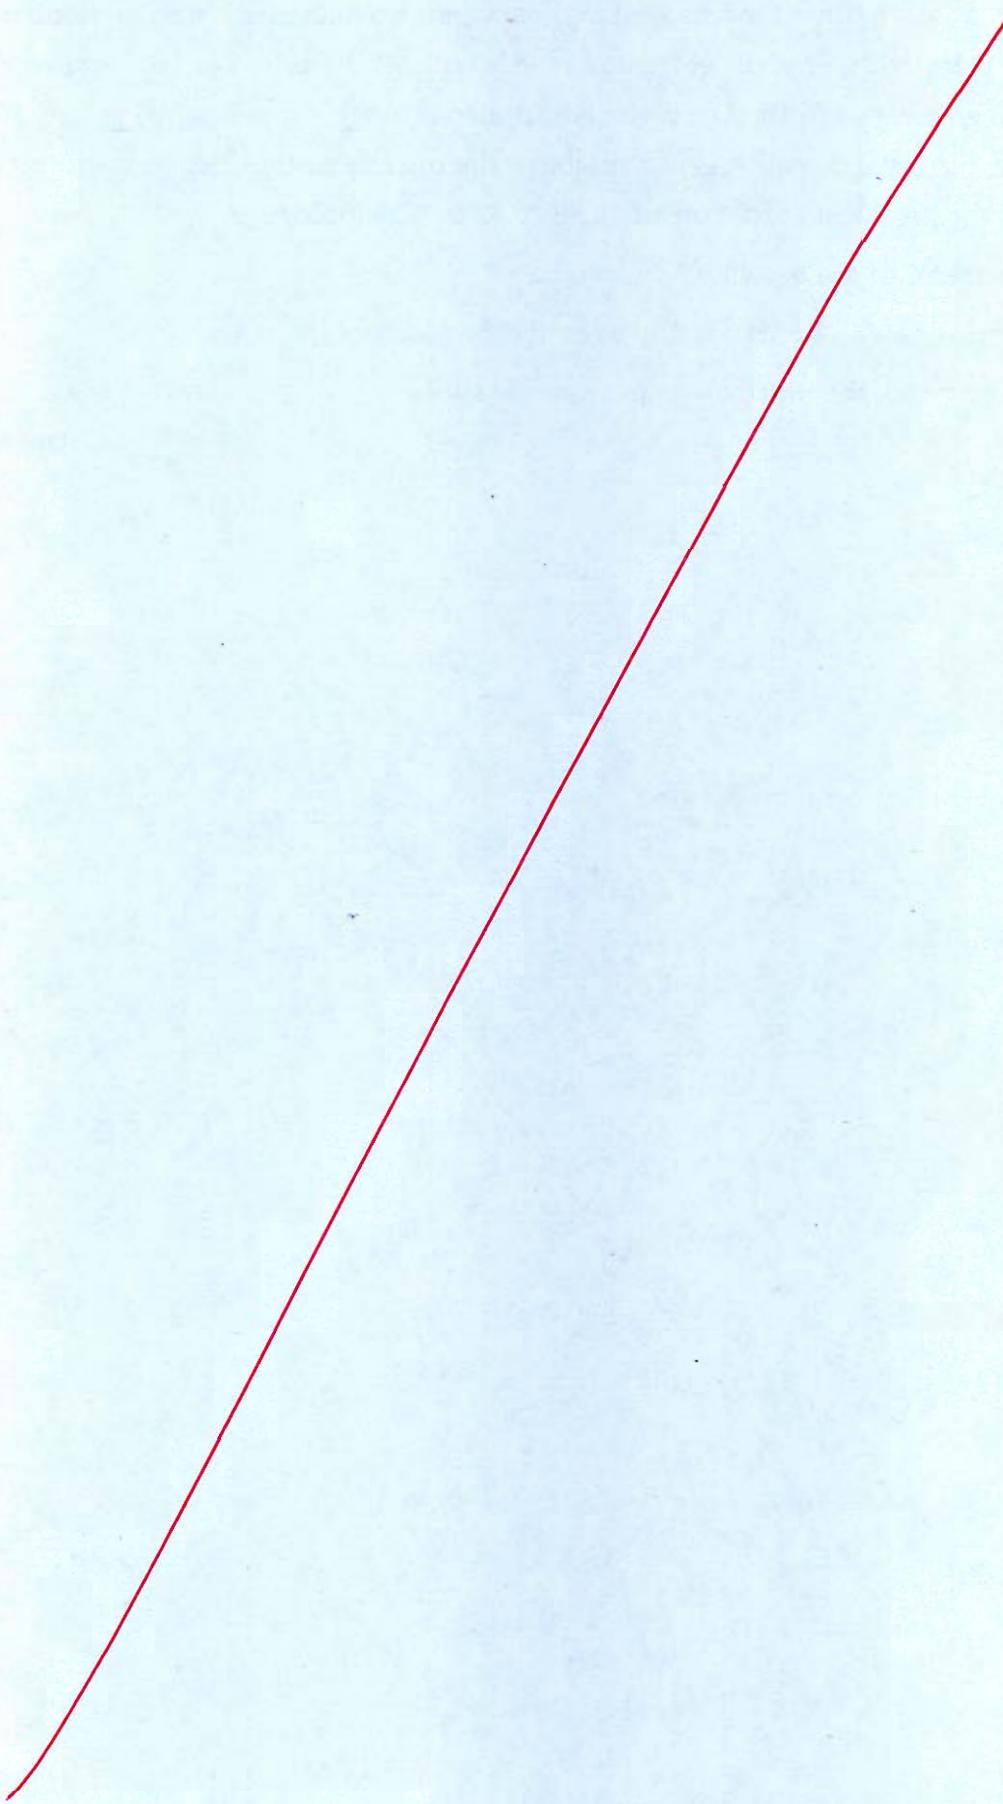




- Q.2 (b) (i) Explain the phenomenon of boundary layer separation. Describe four methods of controlling of boundary layer separation.
- (ii) Two pipes each of length L and diameters D_1 and D_2 are arranged in parallel. The loss of head when a total quantity of water Q flows through them being h_1 . If the pipes are arranged in series the same quantity of water ' Q ' flows through them, the loss of head is h_2 . If $D_1 = 1.5D_2$, determine the ratio of h_1 to h_2 . Neglect minor losses and assume the friction factor f to be constant and to have the same value of for both the pipes.

[8 + 12 marks]



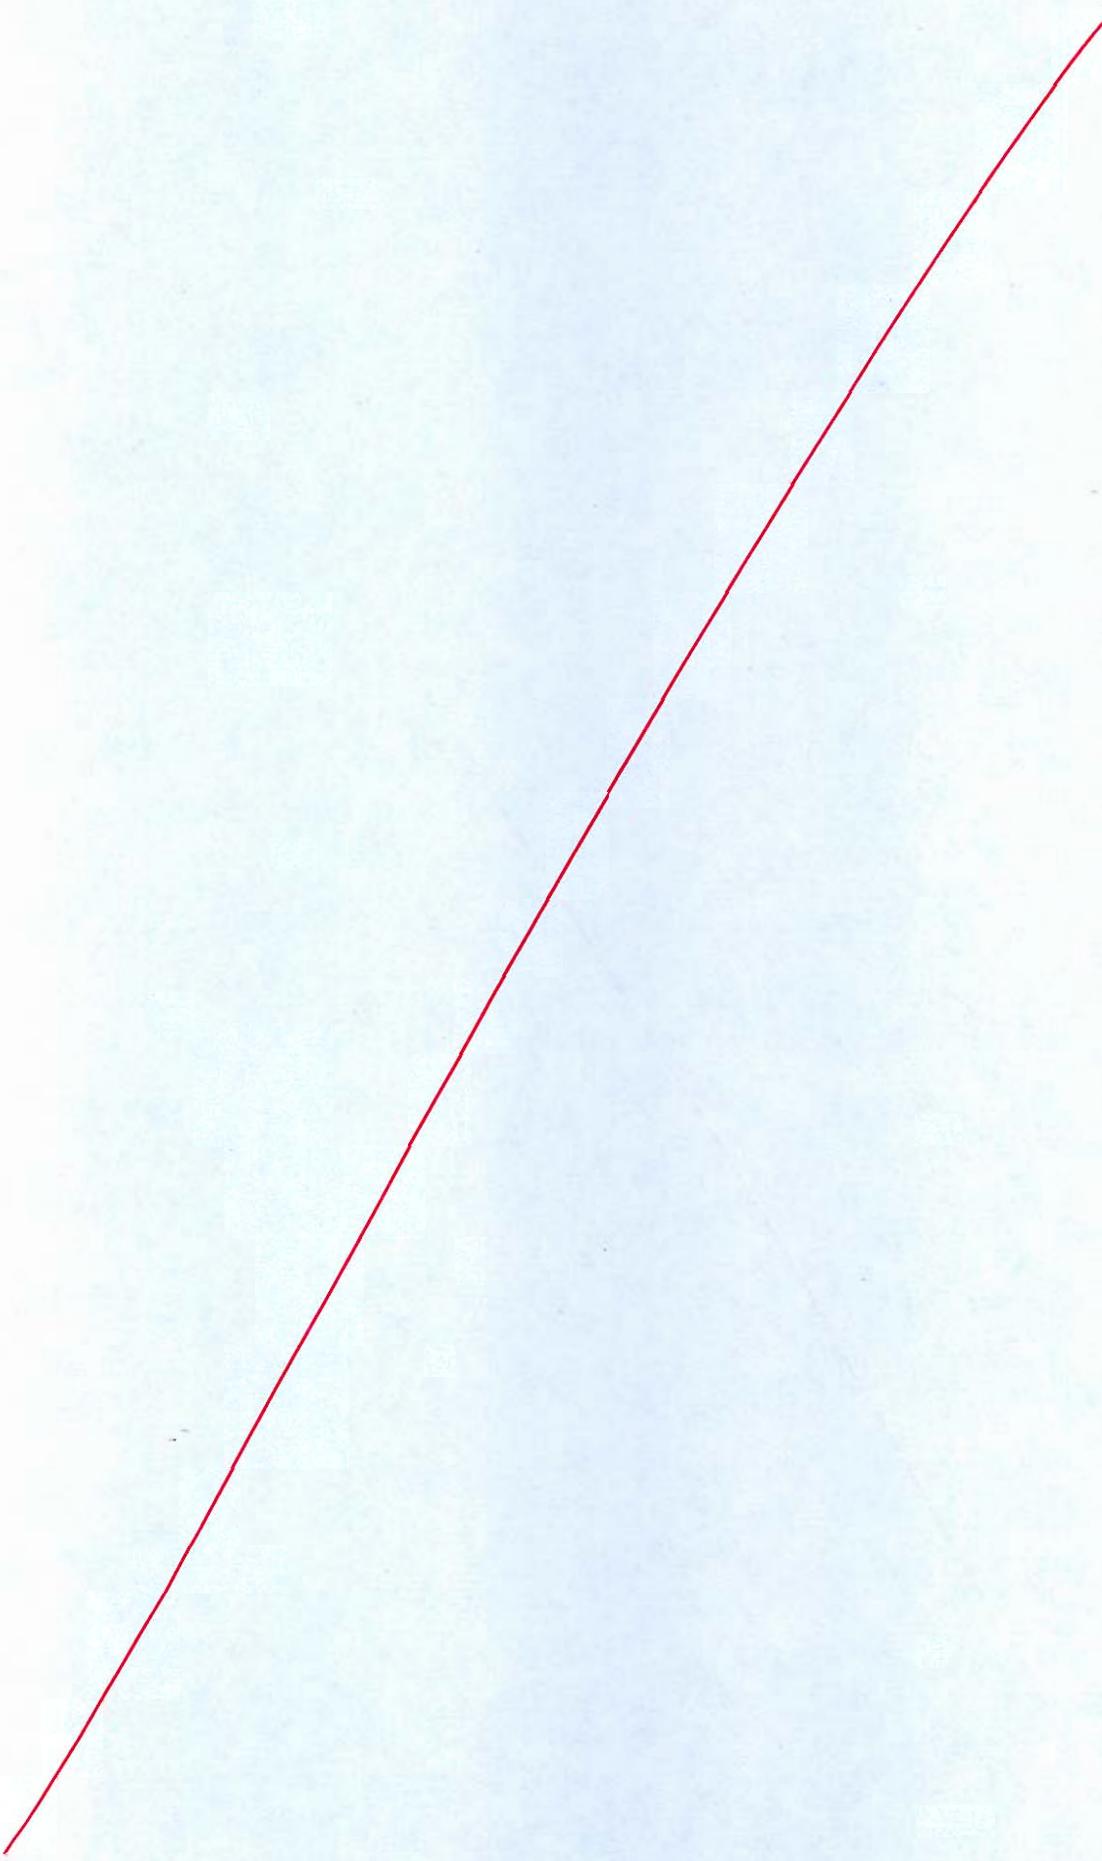


is to convert the given equation into standard form
 $x^2 + y^2 - 6x - 8y + 25 = 0$

$\rightarrow (x-3)^2 + (y-4)^2 = 0$

Efficient way \rightarrow $(x-3)^2 + (y-4)^2 = (-5)^2$

$\rightarrow (x-3)^2 + (y-4)^2 = 25$

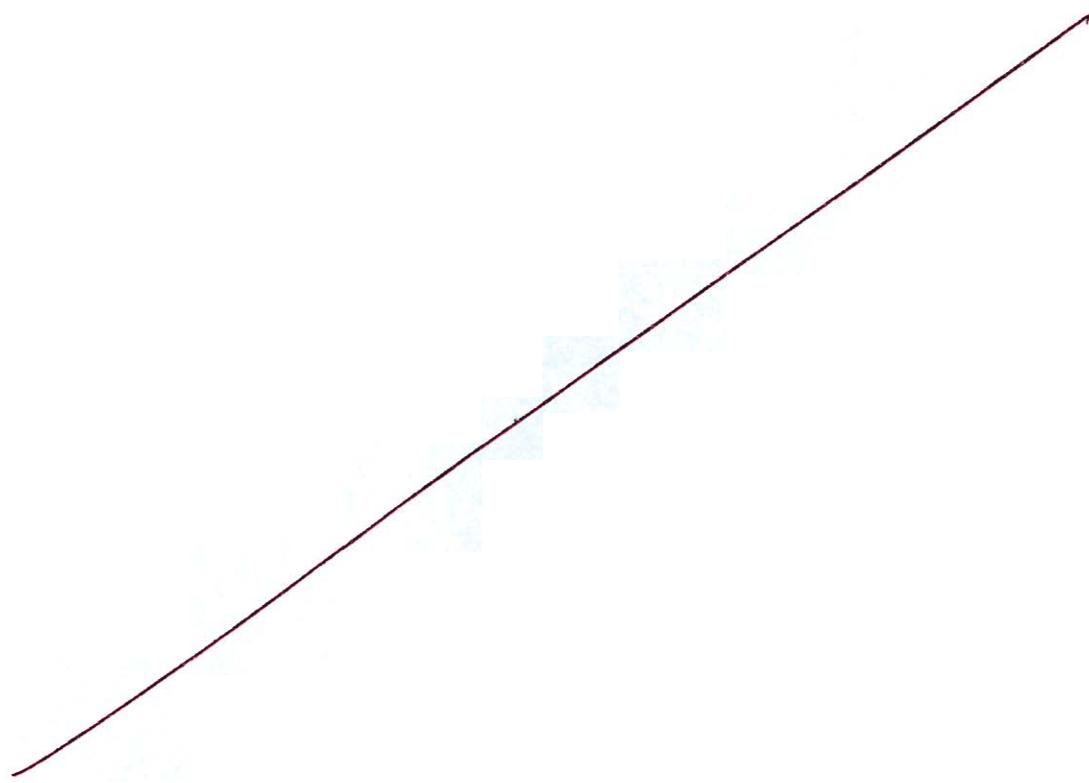

- Q.3 (a) A centrifugal compressor running at 10500 rpm delivers $840 \text{ m}^3/\text{min}$ of free air. The air is compressed from 100 kPa and 7°C to a compression ratio of 4 with an isentropic efficiency of 84%. Impeller has radial blade at outlet and flow velocity of 62 m/s may be assumed to be constant throughout. The slip factor is 0.92. At inlet, blade area coefficient is 0.86. The outer radius of impeller is twice the inner. Determine (i) Final temperature of air, (ii) Theoretical power required, (iii) Diameter of impeller at inlet and outlet, (iv) Breadth of impeller at inlet (v) Blade angle of impeller at inlet and (vi) Blade angle diffuser at inlet. [For air take: $C_p = 1.005 \text{ kJ/kgK}$, $\gamma = 1.4$]

[20 marks]

Given

$P_1 = 100 \text{ kPa}$	$\omega = 10500 \text{ rpm}$
$T_1 = 280 \text{ K}$	$Q = 840 \text{ m}^3/\text{min}$
$\eta_{ise} = 0.84$	

i)
$$\left(\frac{T_{2s}}{T_1}\right) = 4^{\frac{\gamma-1}{\gamma}} \Rightarrow T_{2s} = 416.078 \text{ K}$$

$$\eta_{ise} = \frac{T_{2s} - T_1}{T_2 - T_1} \Rightarrow \boxed{T_2 = 441.997 \text{ K}}$$

(i) ✓



$$u_2 = 62 \text{ m/s.}$$

~~(Power)~~

$$(\text{Power})_{\text{theoretical}} = \frac{\dot{m} \gamma R (T_2 - T_1)}{\gamma - 1}$$

~~isentropic~~ $\dot{m} = \rho Q$

$$\rho = \frac{P}{RT} = \frac{100}{0.287 \times 280} = 1.24 \text{ kg/m}^3$$

$$\dot{m} = \frac{1.24 \times 840}{60} \text{ kg/s}$$

$$\dot{m} = 17.36$$

$(\text{Power})_{\text{theoretical}} = 2824.923 \text{ kW}$ (i)

$$u_2 = \frac{\pi D_2 N}{60} \Rightarrow D_2 = 0.11277 \text{ m}$$

Outlet diameter = 0.11277 m (iii)

$$u_1 = \frac{u_2}{\sqrt{A_2}} = 67.391 = \frac{\pi D_1 N}{60}$$

$$\Rightarrow D_1 = 0.12257 \text{ m}$$

Inlet diameter = 0.12257 m

In complete solution

Answer (a) $\frac{1}{2} \mu$

~~Let m_1 & m_2 be two equal masses~~

~~H-~~

~~Let m_1 & m_2 be two equal masses~~

~~H-~~

~~Let m_1 & m_2 be two equal masses~~

~~H-~~

~~$2E = \frac{1}{2} m v^2$~~

~~or $m_1 v_1^2 + m_2 v_2^2 = 2E$~~

~~Let $m_1 = m_2 = m$~~


~~so $m v_1^2 + m v_2^2 = 2E$~~

~~$m(v_1^2 + v_2^2) = 2E$~~

~~$v_1^2 + v_2^2 = \frac{2E}{m}$~~

~~$v_1^2 + v_2^2 = \frac{2E}{m}$~~

- Q.3 (b) A solid cone of diameter 30 cm and height 20 cm float with its vertex downwards in water as shown in figure. Analyze whether the cone would be stable and float in water with its axis vertical if the specific gravity of cone material is 0.8.

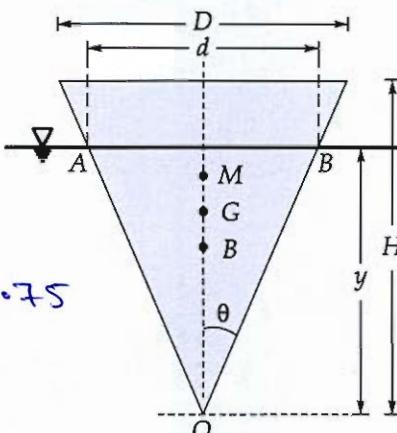

$$\sin \theta = \frac{D}{2H} = 0.75$$

$$D = 0.3 \text{ m}$$

$$H = 0.2 \text{ m}$$

[20 marks]

* Principle of flotation.

$$f_{\text{water}} \times g \times \frac{1}{3} \pi (y \sin \theta)^2 \cdot y = f_{\text{cone}} \times g \times \frac{1}{8} \pi \frac{D^2}{4} \cdot H$$

$$43 \sin^2 \theta = 0.8 \times 0.3^2 + 0.2$$

~~$y = 0.0856 \text{ m}$~~

(5)

$$OB = \frac{y}{2} = 0.09283 \text{ m.}$$

$$OG = \frac{3H}{8} = 0.125 \text{ m}$$

$$BCG = 0.03217$$

$$BM = \frac{I_{\text{min}}}{V_{\text{fd}}} = \frac{\frac{1}{64} \pi (y \sin \theta)^4}{\frac{1}{3} \pi (y \sin \theta)^2 \cdot y} = \frac{3}{64} y \sin^2 \theta$$

$$BM = 0.00489 \quad X$$

$$BM - BCG = -0.02728 < 0$$


It means unstable X

Refer
solution

Cone will be unstable with this vertical in still water.


Q.3 (c) Explain briefly the function of a draft tube. How Kaplan turbine differs with francis turbine. A Kaplan turbine operating under a head of 7.6 m develops 1835 kW with an overall efficiency of 88%. The turbine is set 2.6 m above the tail water level and vacuum gauge inserted at turbine outlet records a suction head of 3.17 m. Calculate the efficiency of the draft tube if it has an inlet diameter of 3.1 m and the loss of head due to friction in the draft tube equals 25% of kinetic head at outlet.

[20 marks]

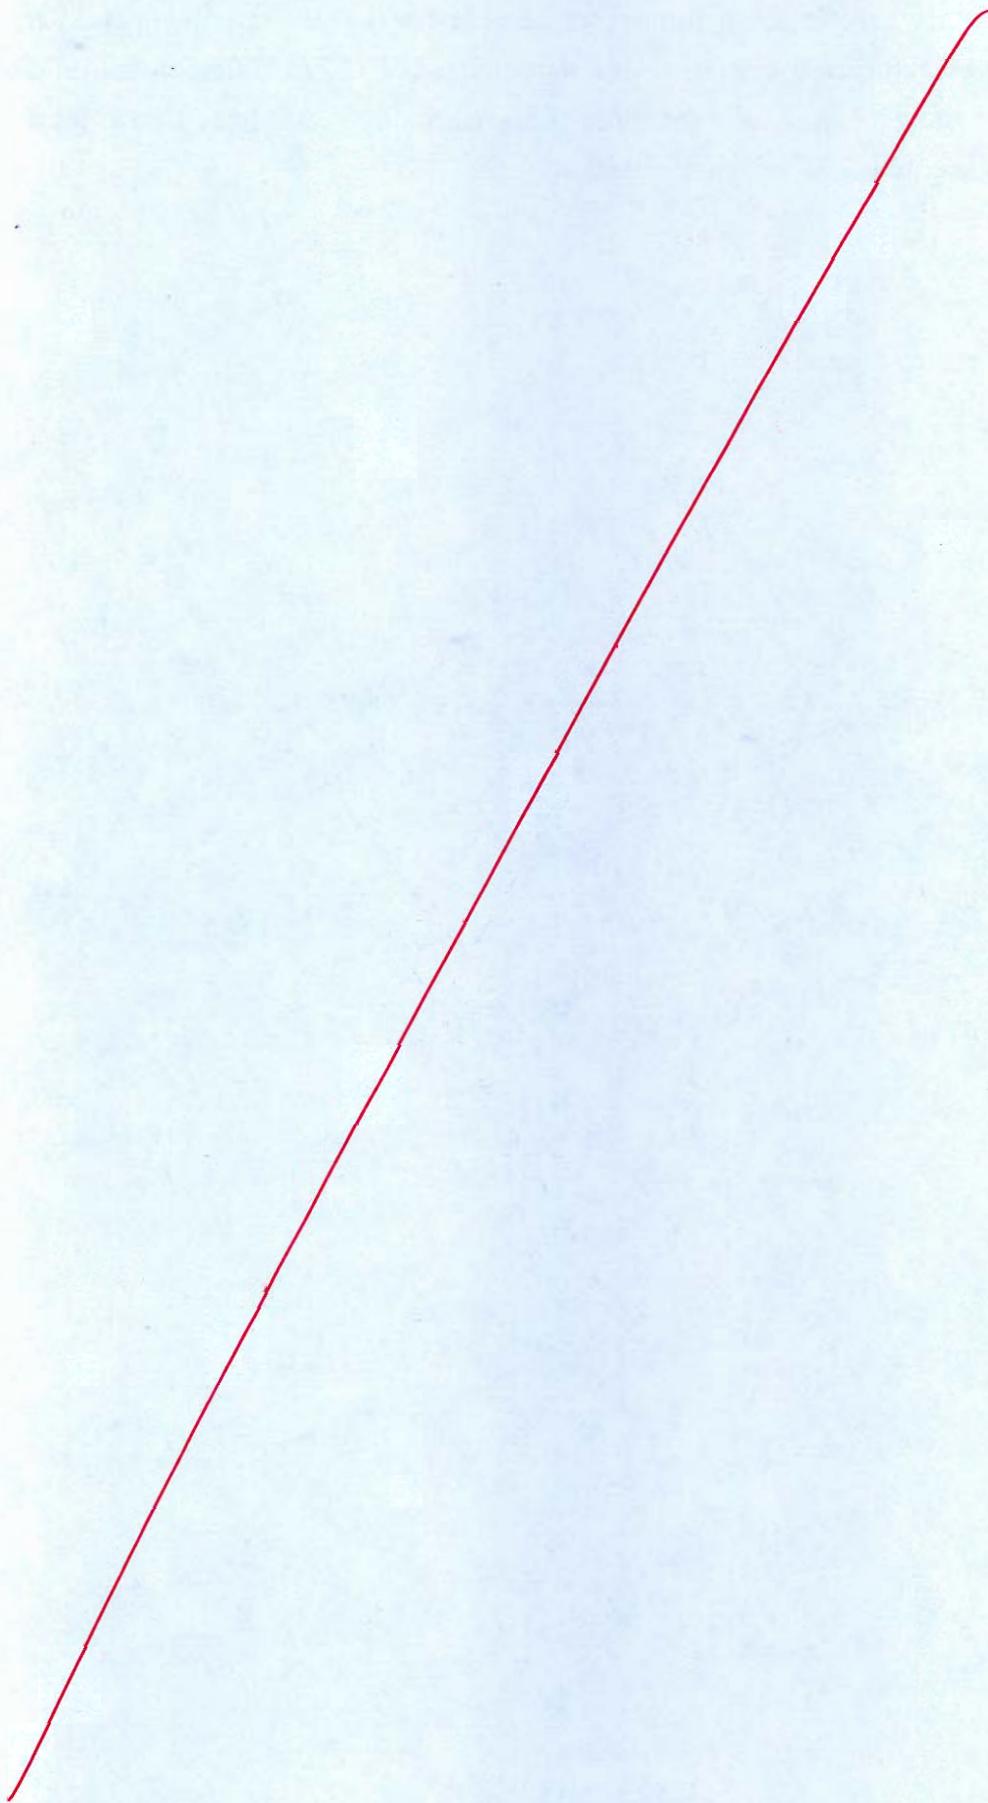

- Q.4 (a)** An axial flow compressor is required to deliver air at the rate 48 kg/s and provide a total pressure ratio of 5 : 1. The inlet stagnation conditions being 290 K and 1 bar. The isentropic efficiency is 88%. The compressor shall have 10 stages with equal rise in total temperature in each stages. The axial velocity of flow is 160 m/s and blade speed is kept at 210 m/s to minimise noise generation. The stage degree of reaction at mean blade height is 50%. Assuming workdone factor as 0.86, calculate all the fluid angles of the first stage. Also, calculate the tip and hub diameter, if hub-tip diameter ratio is 0.82. Also, determine the blade height of the first stage and the speed in rpm. Draw velocity diagram at inlet and outlet of moving blade.
Take $R = 0.287 \text{ kJ/kgK}$ and $c_p = 1.005 \text{ kJ/kgK}$.

[20 marks]

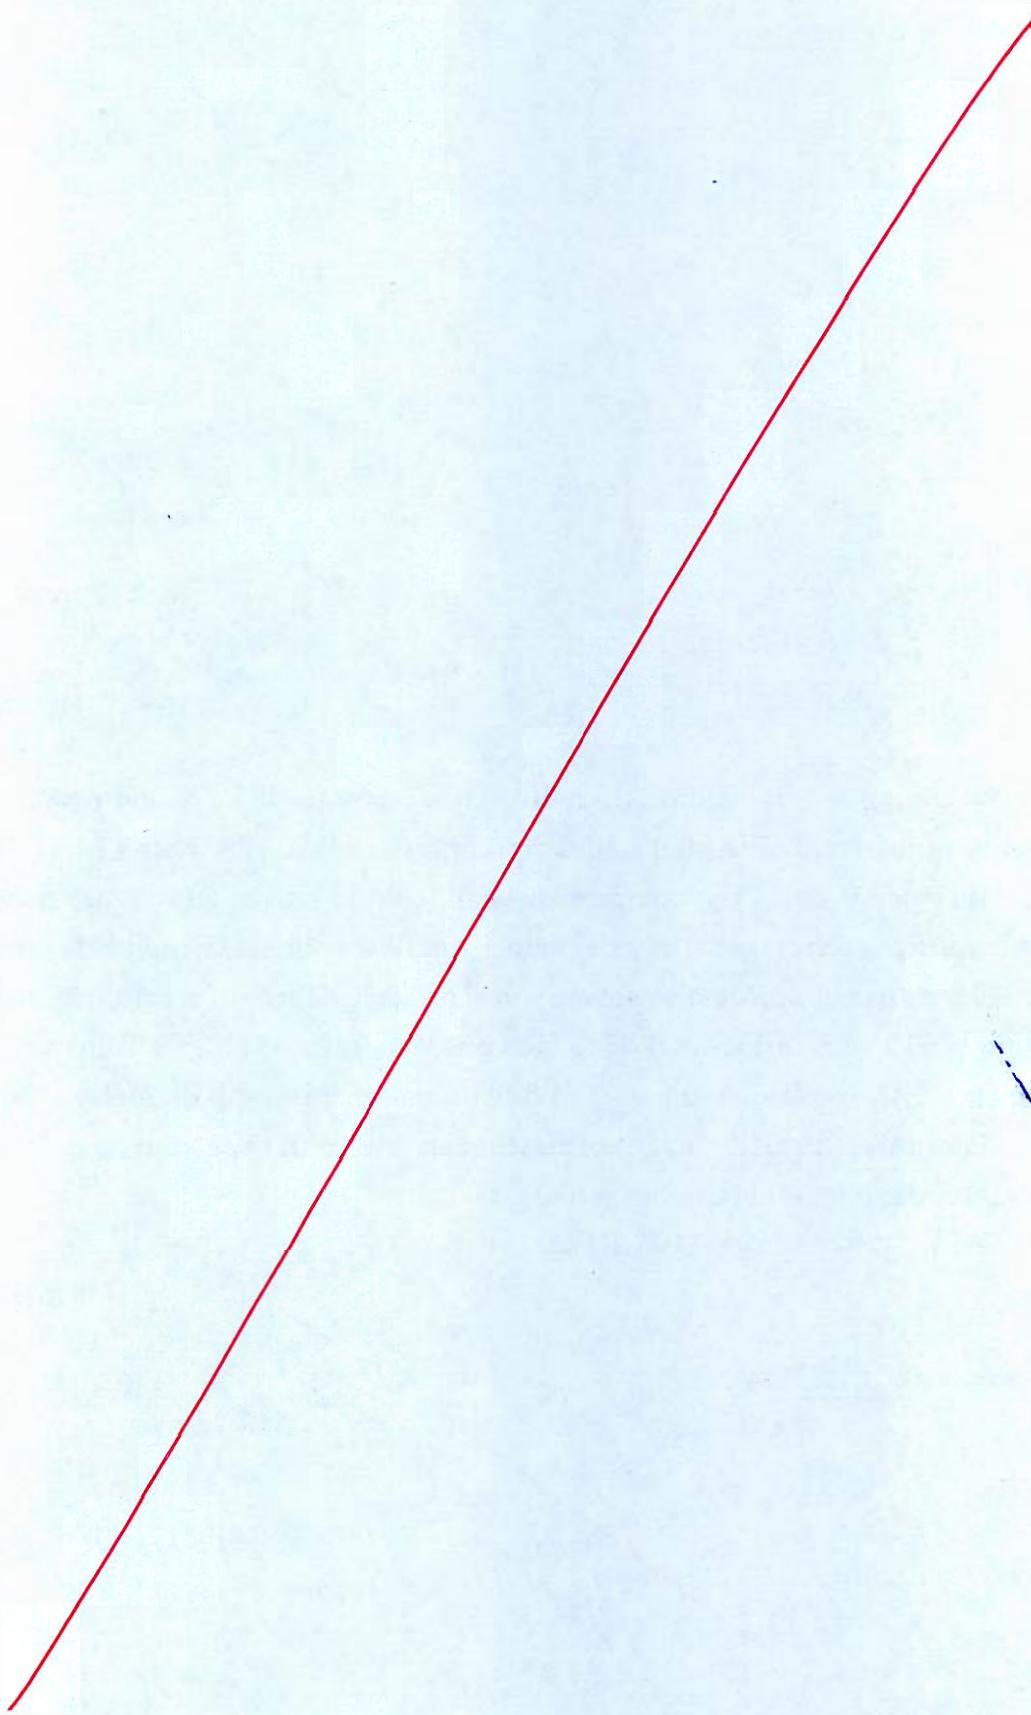


Q.4 (b)

Laminar flow of a fluid of viscosity 0.8 kg/ms and density 1300 kg/m^3 occurs between a pair of plates of extensive width. The plates are 15 mm apart and are inclined at 45° to the horizontal. Pressure guages mounted at two points 1.2 m vertically apart on the upper plate record a pressure of 75 kPa and 250 kPa . The upper plate moves with a velocity of 2 m/s relative to the lower plate but in a direction opposite the fluid flow. Determine

- the velocity and shear stress distribution between the plate.
- the maximum flow velocity, and
- the shear stress on the upper plate.


[20 marks]

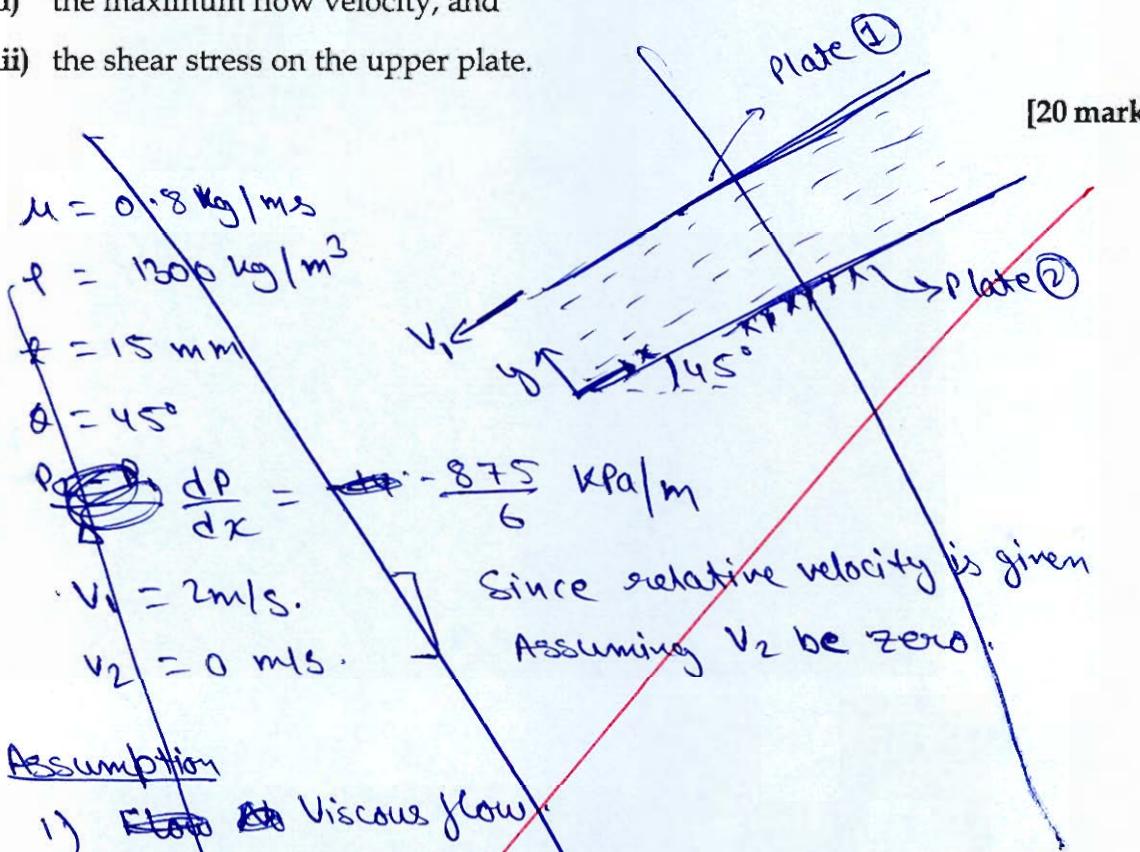Assumption

- 1) ~~Flow~~ ~~Static~~ Viscous flow
- 2) ~~Flow~~ static flow.
- 3) Incompressible fluid
- 4.)


Not Attempted


Do Not Consider it, Please.

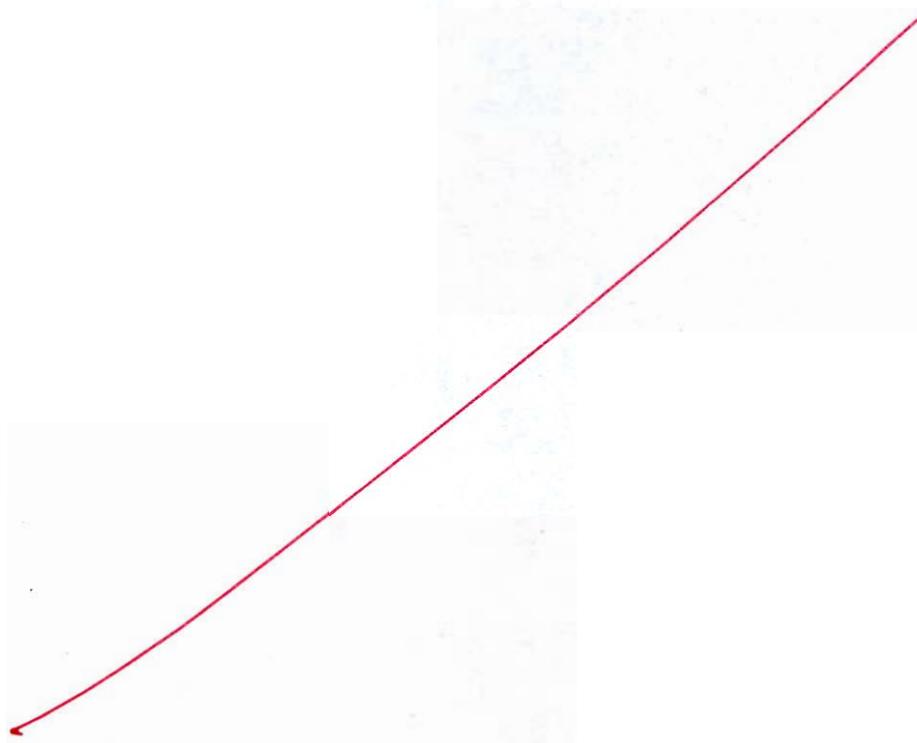

- Q.4 (c)** What are the advantages of using a 50% reaction stage, obtain the maximum blading efficiency of a 50% reaction stage. Show that the diagram work per unit mass of steam for maximum blading efficiency of a 50% reaction stage is U^2 , where U is the mean blade efficiency. Also, draw the velocity diagram of a 50% reaction turbine operating with maximum blading efficiency.

[20 marks]

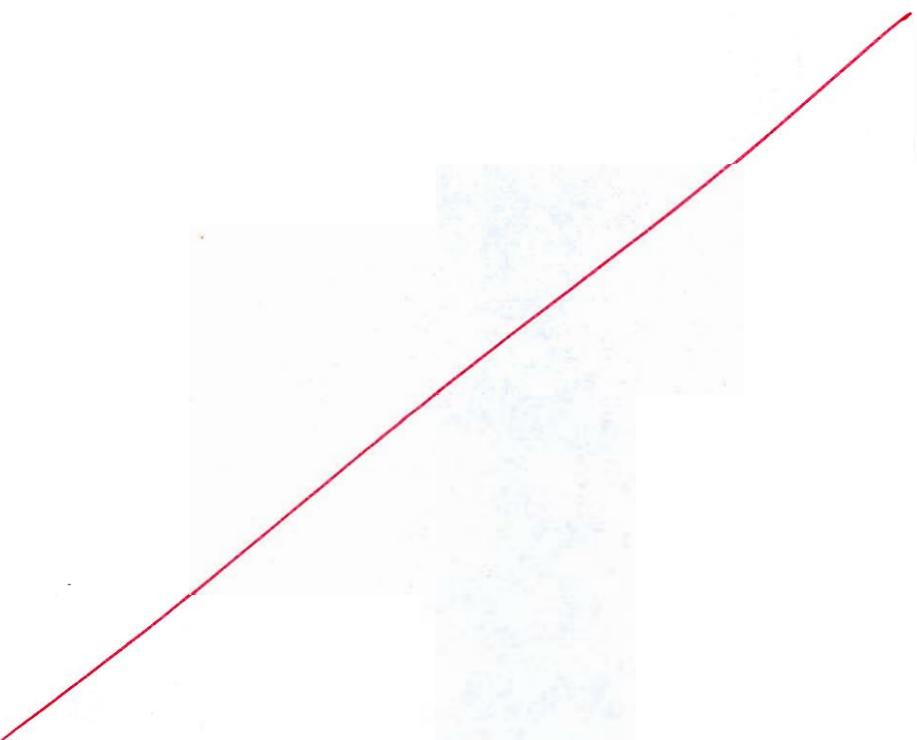

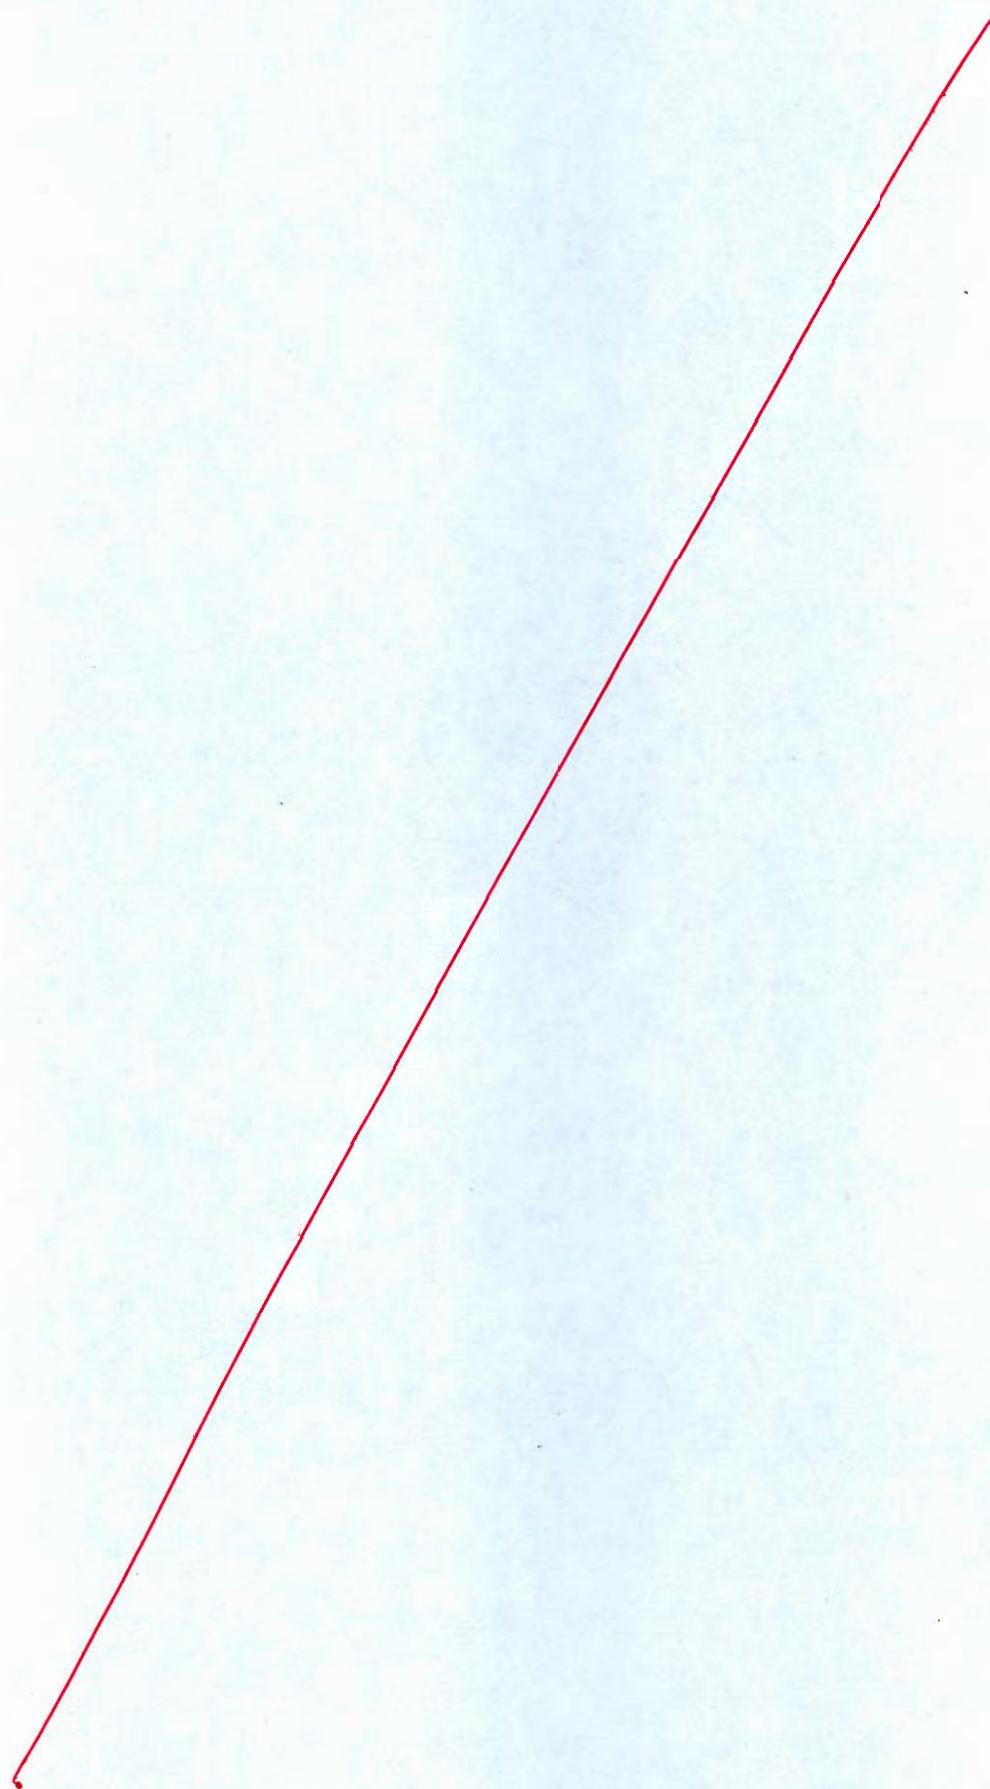

Section : B

- Q.5 (a) A nuclear reactor with its core constructed of parallel vertical plate 2.4 m high and 1.50 m wide has been designed on free convection heating of liquid bismuth. The maximum temperature of the plate surface is limited to 970°C, while the lowest allowable temperature of bismuth is 330°C. Calculate the maximum possible heat dissipation from both sides of each plate. For convective coefficient the appropriate correlation is,


$$Nu = 0.13(Gr \cdot Pr)^{1/3}$$

The thermo-physical properties at mean film temperature of 650°C for bismuth are :
 $\rho = 10^4 \text{ kg/m}^3$; $\mu = 3.12 \text{ kg/m-h}$; $c_p = 150.7 \text{ J/kgK}$; $k = 13.02 \text{ W/mK}$

[12 marks]

- Q.5 (b)** A solid alloy shaft of 80 mm in diameter is coupled with a hollow steel shaft of same external diameter in series. If the angle of twist of the steel shaft per unit length is 72% of that of the alloy shaft, then find the inner diameter of the steel shaft. What will be the speed to transmit 720 kW, if the limiting shear stresses in the alloy and the steel are to be 64 MPa and 80 MPa, respectively? Take $G_{\text{steel}} = 1.8 G_{\text{alloy}}$.

[12 marks]

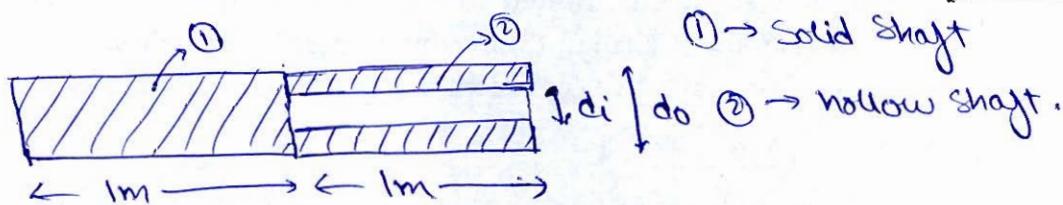

$$d_1 = 80 \text{ mm}$$

$$l_1 = l_2 = 1000 \text{ mm}$$

$$G_{\text{alloy}} = G_1, \quad P = 720 \text{ kW}$$

$$(\tau_1)_{\text{limit}} = 64 \text{ MPa} \quad (\tau_2)_{\text{limit}} = 80 \text{ MPa}$$

$$\text{Given, } \theta_2 = 0.72 \theta_1$$

$$d_i = ?$$

$$T_1 = T_2 \text{ (Let's)}$$

6

$$\frac{T_1}{G_1 J_1} = \frac{T_2}{G_2 J_2} + 0.72$$

$$1.8 G_1 \times \frac{\pi}{4} d_1^4 (1 - k^4) = G_1 \times \frac{\pi}{64} d_1^4 \times 0.72$$

✓

$$\Rightarrow K = 0.9898$$

$$d_i = K d_o = 79.187 \text{ mm}$$

\therefore Inner diameter of Steel shaft = 79.187 mm

Now,

$$\tau_1 = \frac{T}{Z P_1} \leq (\tau_1)_{\text{limit}}$$

$$T \leq 64 \times \frac{\pi}{16} \times (80^3)$$

$$T \leq 6433.981 \text{ N-m}$$

Refer
solution

$$\tau_2 = \frac{T}{Z P_2} \leq (\tau_2)_{\text{limit}}$$

$$T \leq 80 \times \frac{\pi}{16} \times 80^3 \times (1 - 0.9898^4)$$

$$T \leq 323.146 \text{ N-m}$$

$$\therefore T_{\text{max}} = 323.146 \text{ N-m}$$

$$P = T_{\text{max}} \cdot w$$


$$w = 2228.095 \text{ rad/s}$$

\therefore Speed of Transmission will be 2228.095 rad/s


- Q.5 (c) Briefly explain the working of thermostatic expansion valve for refrigerant flow control. Draw a neat sketch and write the functions of thermostatic expansion valve.

[12 marks]

Ans: Thermostatic expansion valve controls refrigerant flow by varying its opening. It consists of a bulb containing refrigerant which is connected to a diaphragm. The bulb is exposed to the suction line. As the temperature of refrigerant in the bulb increases, the pressure also increases, which causes the diaphragm to move outwards, thereby increasing the valve's opening. Conversely, if the temperature decreases, the pressure also decreases, causing the diaphragm to move inwards, which reduces the valve's opening. This results in a change in refrigerant flow rate. The functions of a thermostatic expansion valve include maintaining constant pressure in the evaporator, preventing liquid slug formation, and ensuring uniform refrigerant distribution throughout the system. It also helps in reducing the pressure drop across the evaporator coil.


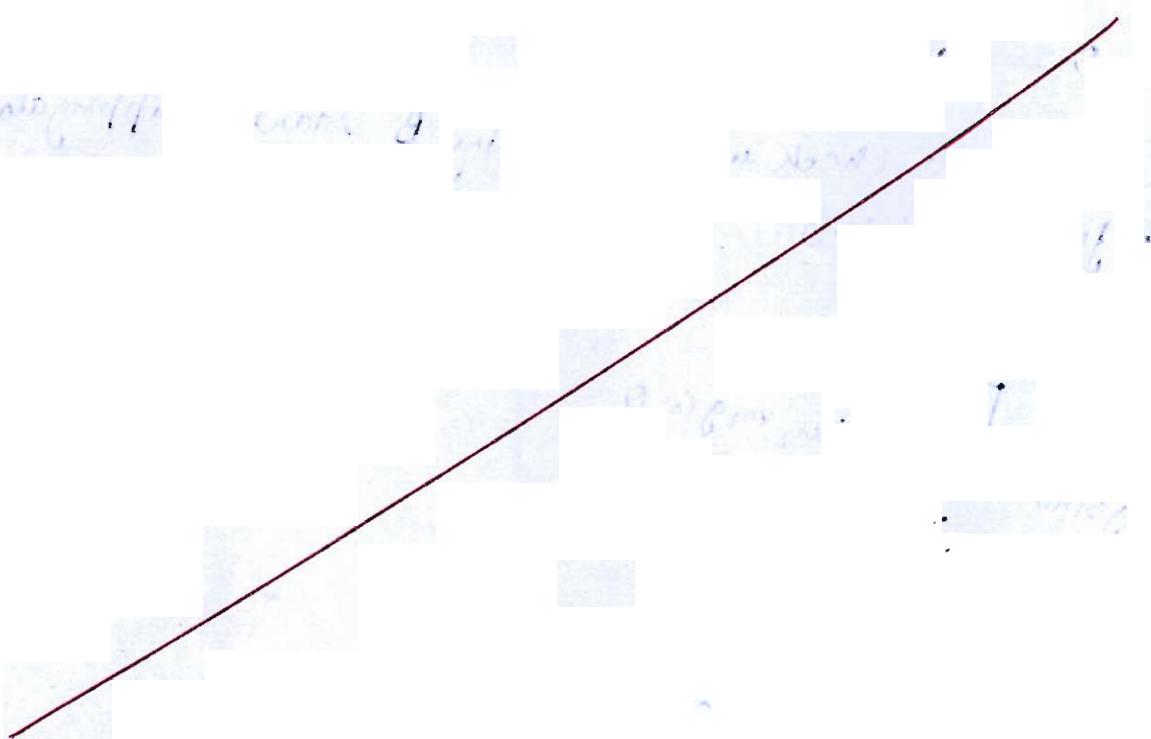


- Q.5 (d) Two blocks A and B are placed on an inclined plane. Weights of blocks A and B are 450 N and 560 N, respectively. Coefficients of friction between block A and plane is 0.25 and between block B and plane is 0.32 as shown in figure. To what angle θ , the plane should be raised so that bodies start slipping down the plane?

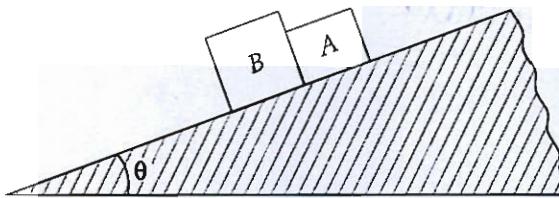

Assuming both bodies start slipping together Let

[12 marks]
Body B be ② $\mu_2 = 0.32$
& Body A be ① $\mu_1 = 0.25$

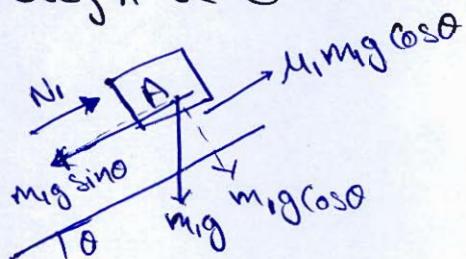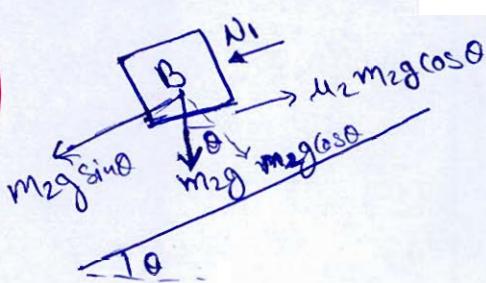

∴ ~~the~~ bodies to start slipping.


$$m_2 g \sin \theta + m_1 g \sin \theta = \mu_2 m_2 g \cos \theta + \mu_1 m_1 g \cos \theta$$

$$\tan \theta = \frac{\mu_2 m_2 + \mu_1 m_1}{m_1 + m_2} = 0.2888$$

$$\theta = \tan^{-1}(0.2888)$$

$$\theta = 16.109^\circ$$

Now, let's check whether body B starts slipping alone before $\theta = 16.109^\circ$. ✓

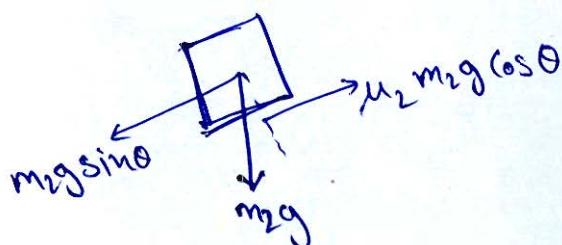


$$m_2 g \sin \theta = \mu_2 m_2 g \cos \theta$$

$$\tan \theta = 0.32$$

$$\theta = 17.746^\circ$$
✓

\therefore Both bodies will start slipping when $\theta = 16.109^\circ$
from the horizontal. ✓

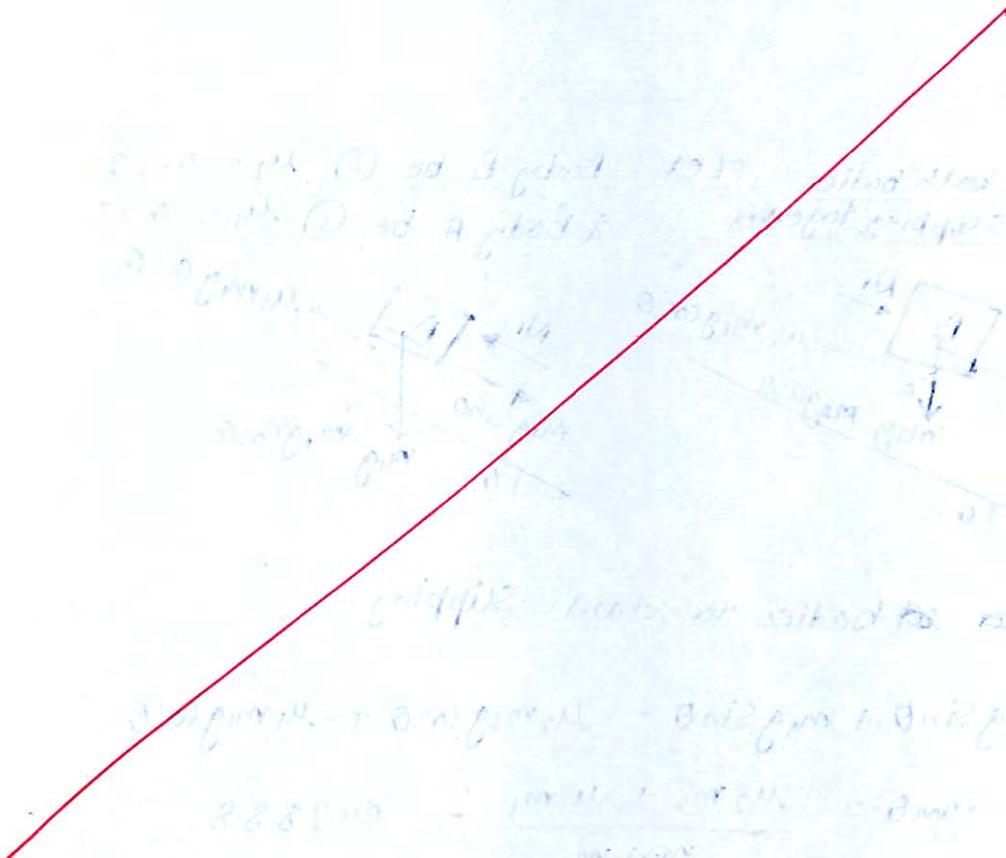

$$\begin{aligned} w_{max} &= \phi_1 - \phi_2 \\ &= (u_1 - u_2) - T_0(s_2 - s_1) \\ &= (2750.8 - \end{aligned}$$

4

$$\begin{aligned} w_{max} &= \phi_1 - \phi_2 \\ &= -(u_2 - T_0 s_2) - (u_1 - T_0 s_1) \\ &= -(u_2 - u_1) - T_0(s_2 - s_1) \\ &= -(2810.6 - 2750.8) - 300(8.2172 - 6.5412) \end{aligned}$$

$$w_{max} = +443 \text{ kJ/kg}$$

$$w_{max} = 88.6 \text{ kJ}$$

$\therefore 88.6 \text{ kJ}$ of maximum work can be obtained
from the steam.

Refer Solution

Q.6 (a) In an aqua-ammonia absorption refrigeration system of 10 tonnes refrigeration capacity the vapour leaving the generator are 100% pure NH_3 saturated at 40°C . The evaporator, absorber, condenser and generator temperatures are -20°C , 30°C , 40°C and 170°C respectively. At absorber exit (strong solution) the concentration of ammonia in solution is 0.4 and enthalpy of 25 kJ/kg . At generator exit (weak solution) the concentration of ammonia in solution is 0.2 and enthalpy of 700 kJ/kg . The enthalpy of saturated liquid and saturated vapour ammonia at 40°C are 371.9 kJ/kg and 1473.3 kJ/kg respectively. The enthalpy of saturated vapour ammonia from evaporator exit at -20°C is 1420 kJ/kg .

- Determine the mass flow rate of ammonia in the evaporator.
- Carry out overall mass conservation and mass conservation of ammonia in absorber to determine mass flow rates of weak and strong solution.
- Determine the heat rejection in absorber and condenser, heat added in generator and C.O.P.

[20 marks]




$$RC = 10 \text{ tonnes} = 35 \text{ kW}$$


At absorber exit $h_1 = 25 \text{ kJ/kg}$

$$h_1 = 25 \text{ kJ/kg}$$

$$h_2 = 700 \text{ kJ/kg}$$

$$h_3 = 371.9 \text{ kJ/kg}$$

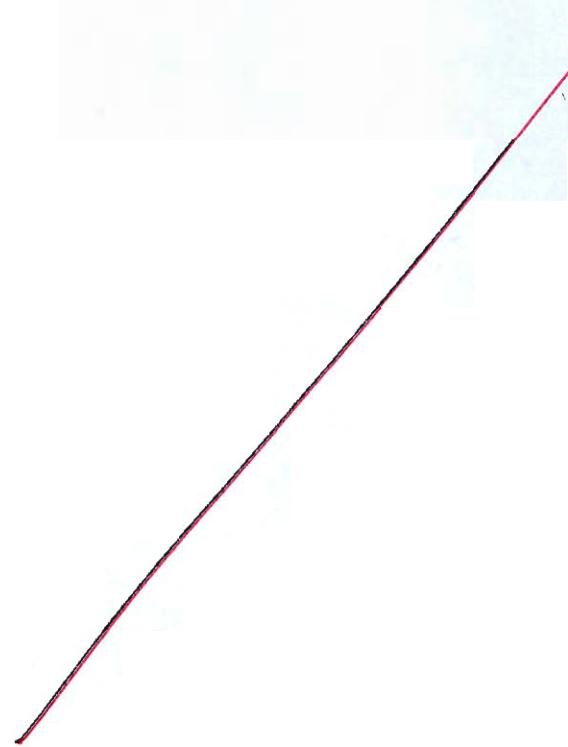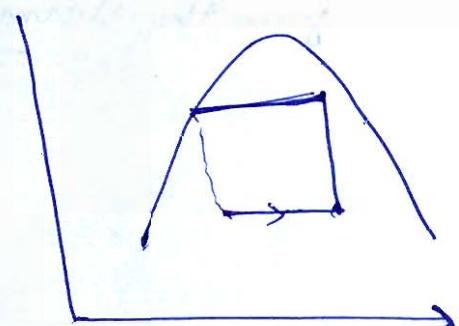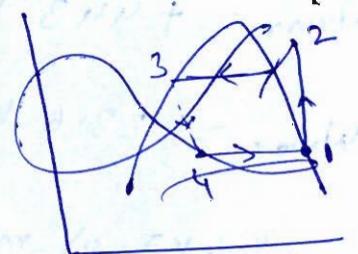

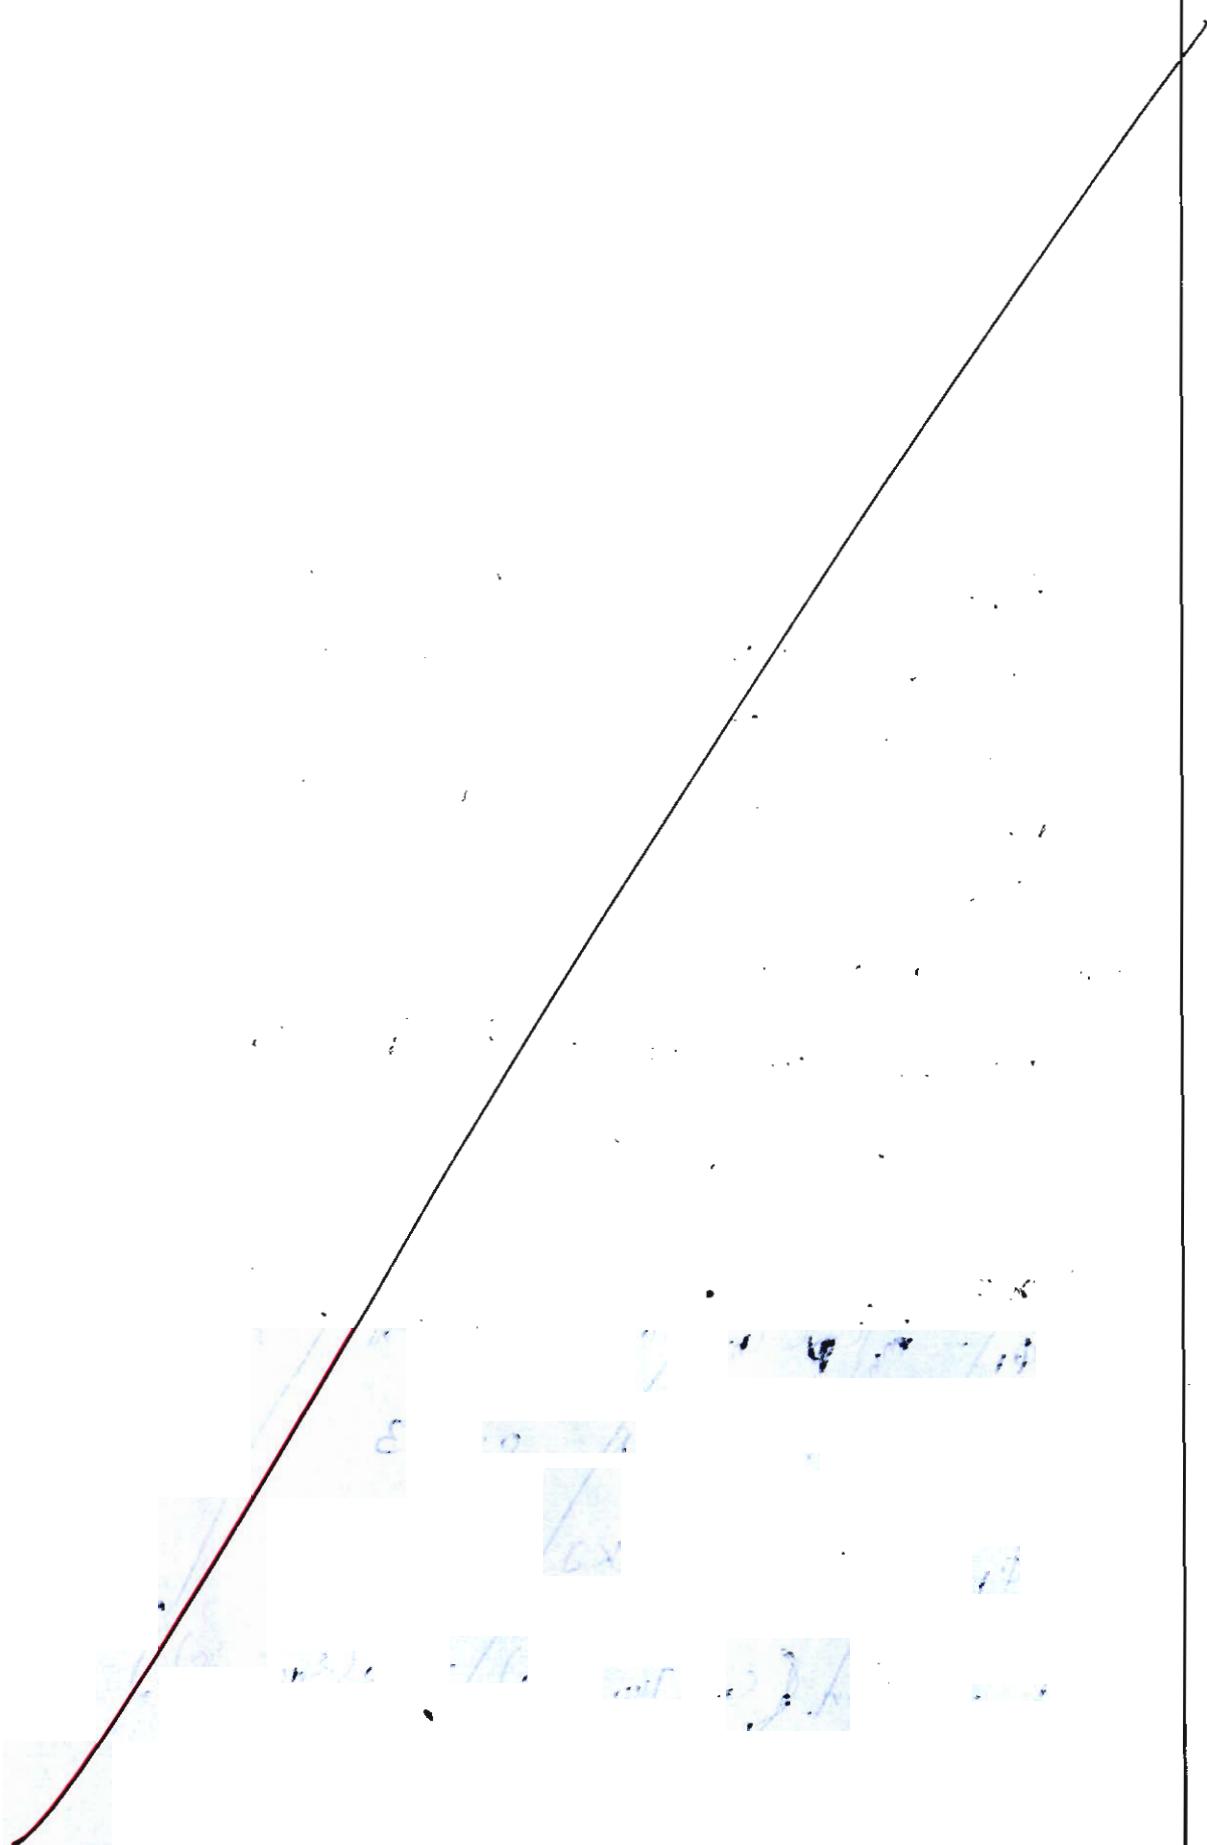

- Q.6 (b) An air preheater is used to heat up the air used for combustion by cooling the outgoing products of combustion from a furnace. The rate of flow of the products is 12 kg/sec, and the products are cooled from 600°C to 450°C and the specific heat at constant pressure for products and for air are 1.09 kJ/kgK and 1.005 kJ/kgK respectively. The rate of air flow is 8 kg/sec and the initial air temperature is 40°C . Determine the following :
- the initial and final availability of the products.
 - the irreversibility of the process.
 - if the heat transfer from the products were to take place reversibly through heat engine, what would be the final temperature of the air and the power developed by heat engine? Take ambient temperature $T_0 = 300 \text{ K}$.

[20 marks]

Solⁿ)

$$\dot{m}_h = 12 \text{ kg/s}$$

$$T_{hi} = 600^{\circ}\text{C} (873 \text{ K})$$

$$T_{ho} = 450^{\circ}\text{C} (723 \text{ K})$$

$$c_{ph} = 1.09 \text{ kJ/kgK}$$

$$T_0 = 300 \text{ K}$$

$$\dot{m}_c = 8 \text{ kg/s}$$

$$T_{ci} = 40^{\circ}\text{C}$$

$$c_{pc} = 1.005 \text{ kJ/kgK}$$

Energy balance.

$$\dot{m}_h c_{ph} (T_{ho} - T_{hi}) = \dot{m}_c c_{pc} (T_{co} - T_{ci})$$


$$\Rightarrow T_{co} = 284.029^{\circ}\text{C}$$

$$i) \quad \phi_1 = \dot{m}_h \{ c_p (T_{hi} - T_0) - T_0 (s_{hi} - s_0) \}$$

$$c_v = c_p - R = 0.803$$

$$\phi_1 = -1300.632 \text{ kJ}$$

$$\phi_2 = \dot{m}_h \{ c_v (T_{ho} - T_0) - T_0 (s_{ho} - s_0) \}$$

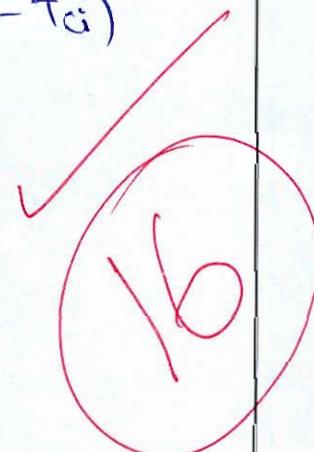

$$i) \phi = R_p - T_0 s$$

$$\phi_1 = \left\{ C_p (T_{hi} - T_0) - T_0 C_p \ln \left(\frac{T_{hi}}{T_0} \right) \right\} m_n$$

$$\phi_1 = 3303.407 \text{ kJ/kg}$$

$$\phi_2 = \left\{ C_p (T_{lo} - T_0) - T_0 C_p \ln \left(\frac{T_{lo}}{T_0} \right) \right\} m_n$$

$$\phi_2 = 2081.184 \text{ kJ/kg}$$


$$ii) \Delta S_h = m_n C_p h \ln \left(\frac{T_{lo}}{T_{hi}} \right) = -2.4659 \text{ kJ/K}$$

$$\Delta S_c = m_c C_p \ln \left(\frac{T_{lo}}{T_{ci}} \right) = 4.6343 \text{ kJ/K}$$

$$(\Delta S)_{\text{Total}} = 2.1684 \text{ kJ/K}$$

$$I_{sr} = T_0 (\Delta S)_{\text{Total}} = 650.52 \text{ kW}$$

iii)

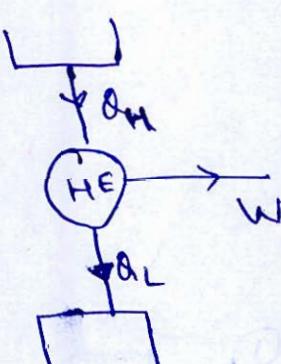

$$\dot{Q}_H = m_n C_p h (T_{lo} - T_{hi}) \\ = 1962 \text{ kW}$$

$$\dot{Q}_L = I_{sr} = 650.52 \text{ kW}$$

$$m_c C_p (T_{lo} - T_{ci}) = I_{sr}$$


$$\Rightarrow T_{lo} = 120.91^\circ \text{C}$$

$$\dot{W} = \dot{Q}_H - \dot{Q}_L$$

$$\boxed{\dot{W} = 1311.48 \text{ kW}}$$

\therefore Power developed by Heat Engine will be 1311.48 kW

- Q.6 (c)** A beam AB of 6 m span is simply supported at the ends and is loaded as shown in figure below. Determine : (i) Deflection at C , (ii) Maximum deflection and (iii) Slope at end A . Take $E = 2 \times 10^5$ N/mm 2 and $I = 2500$ cm 4 .

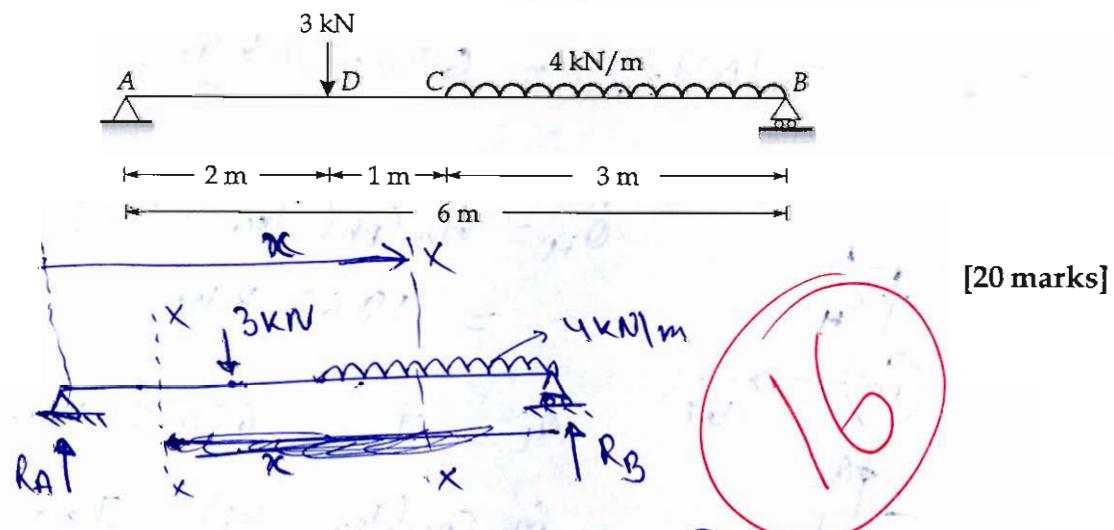

$$R_A + R_B = 3 + 12 = 15 \quad \text{--- (1)}$$

$$\sum M_A = 0 = 3(2) + 12(4.5) - R_B(6) = 0$$

$$\Rightarrow R_B = 10 \text{ kN}$$

$$R_A = 5 \text{ kN}$$

With 7.5 kN load, what will be the deflection at C?

~~$M_{xx} = 2(x-4)$~~

$$M_{xx} = R_A \cdot x - 3(x-2) - \frac{4(x-3)^2}{2}$$

$$M_{xx} = 5x - 3(x-2) - 2(x-3)^2$$

$$EI \frac{d^2y}{dx^2} = 5x - 3(x-2) - 2(x-3)^2$$

$$EI \cdot \frac{dy}{dx} = 5 \frac{x^2}{2} - \frac{3(x-2)^2}{2} - \frac{2(x-3)^3}{3} + c_1$$

$$EI \cdot y = 5 \frac{x^3}{6} - \frac{3(x-2)^3}{6} - \frac{2(x-3)^4}{12} + c_1 x + c_2$$

Applying BCi

$$\text{at } x=0, y=0$$

$$0 = 0 + c_1(0) + c_2$$

$$\Rightarrow \boxed{c_2 = 0}$$

$$\text{at } x=6, y=0$$

$$0 = 5(6)^2 - 3 \frac{4^3}{6} - \frac{2 \cdot 3^4}{12} + c_1(6)$$

$$\Rightarrow c_1 = -\frac{269}{12} = -22.4167$$

$$\Rightarrow y = \frac{1}{EI} \left[5 \frac{x^3}{6} - \frac{3(x-2)^3}{6} - \frac{2(x-3)^4}{12} - \frac{269}{12} x \right]$$

④ $EI = \frac{2 \times 10^5 N}{mm^2} \times 2500 \times 10^4 mm^4 mm^2$

$$= \frac{2 \times 10^5 \times 2500 \times 10^4}{10^5} KN \cdot m^2$$

$$= 5000 KN \cdot m^2$$

i) $y \text{ at } x=3$

$$y = \frac{1}{5000} \left[5 \cdot \frac{x^3}{6} - 3 \cdot \frac{x^3}{6} - \frac{286 \cdot x^3}{12} \right]$$

$$y = -0.0104 \text{ m}$$

\downarrow it means downward deflection.

$$\therefore y_c = 10.4 \text{ mm} \quad (\downarrow)$$

ii) $\Delta_{\text{max}} \Rightarrow \frac{dy}{dx} = 0$

$$\frac{dy}{dx} = 5 \cdot \frac{x^2}{2} - \frac{3(x-2)^2}{2} - \frac{2(x-3)^3}{3} - \frac{269}{12} = 0$$

$$\Rightarrow x = 3.5$$

$$y_{\text{max}} = \frac{1}{5000} \left(5 \cdot \frac{3.5^3}{6} - 3 \cdot \frac{1.5^3}{6} - \frac{2(0.5^4)}{12} - \frac{269 \cdot 3.5}{12} \right)$$


$$y_{\text{max}} = -8.885 \times 10^{-3} \text{ m}$$

$$y_{\text{max}} = 8.885 \text{ mm} \quad (\downarrow)$$

Refir solution

iii) $\theta_A = \frac{1}{EI} [\xi_1] = -4.483 \times 10^{-3} \text{ radians}$

~~negative sign means~~

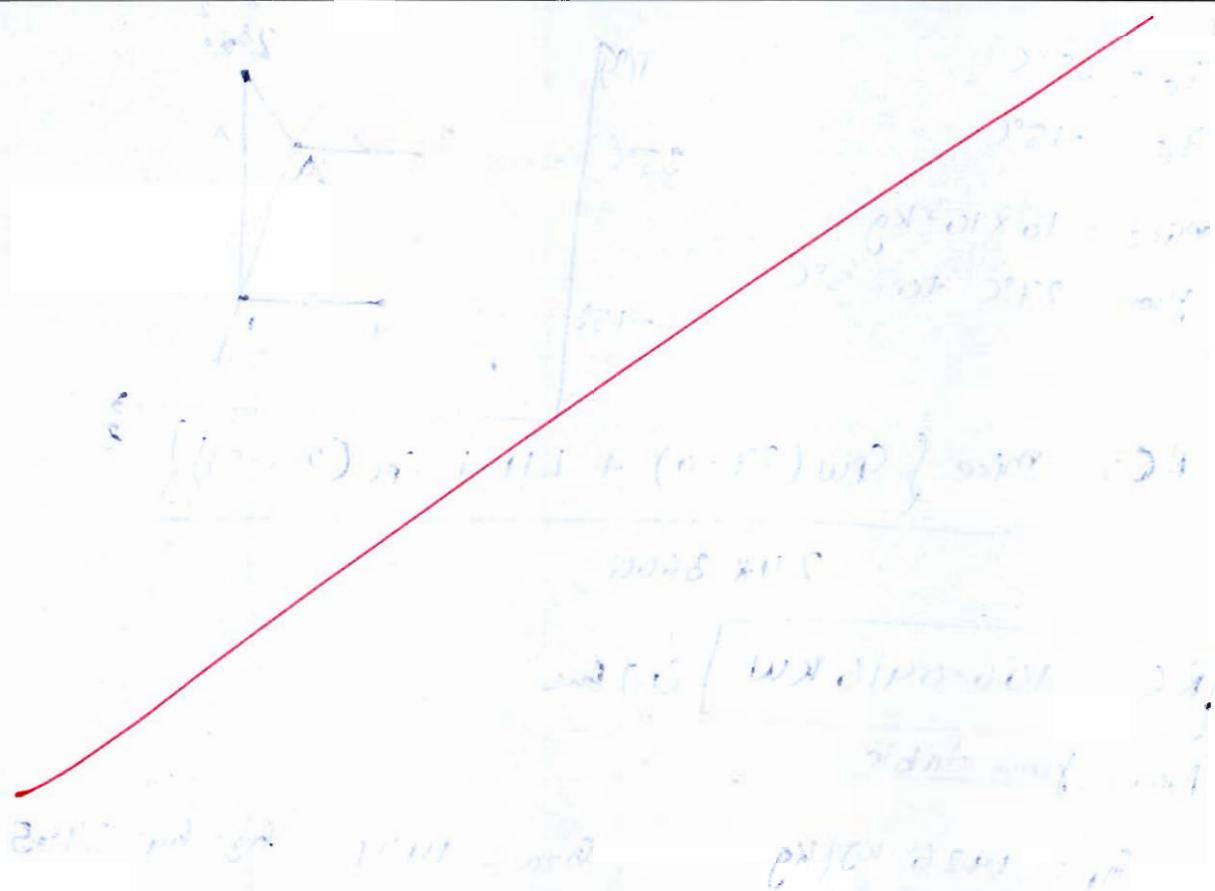

.7 (a)

An ammonia ice plant operates between condenser temperature of 35°C and an evaporator temperature of -15°C. It produces 10 tons of ice per day from water at 27°C to ice at -5°C. The NH₃ enters the compressor as dry saturated vapour and leaves the condenser as saturated liquid. Determine,

- (i) The capacity of the refrigerating plant.
- (ii) Mass flow rate of the refrigerant.
- (iii) Power of the compressor motor if the isentropic efficiency of the compressor is 82% and mechanical efficiency of the compressor is 94%.
- (iv) Relative efficiency

Take latent heat of ice = 335 kJ/kg

Specific heat of ice = 1.94 kJ/kgK

Specific heat of water = 4.2 kJ/kgK

Use the following properties of NH₃

Saturation	Enthalpy (kJ/kg)		Entropy kJ/kg-K		Specific heat (kJ/kg-K)	
Temp. (°C)	h_f	h_g	s_f	s_g	Liquid, C_{pf}	Vapour, C_{pg}
-15	112.3	1426	0.457	5.549	—	—
35	347.5	1471	1.282	4.930	4.6	2.8


[20 marks]

$$T_c = 35^\circ\text{C}$$

$$T_e = -15^\circ\text{C}$$

$$m_{\text{ice}} = 10 \times 10^3 \text{ kg}$$

from $27^\circ\text{C} \rightarrow 0^\circ\text{C}$

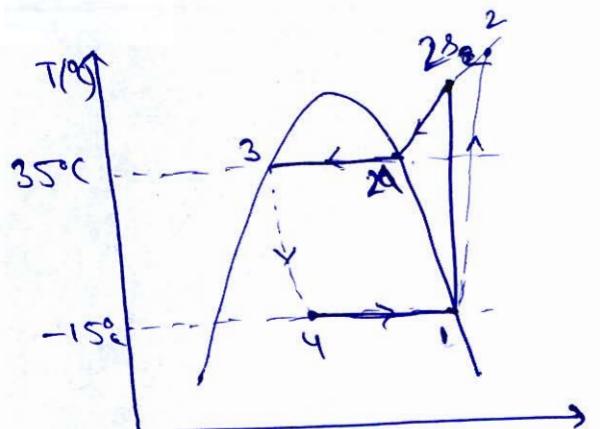

$$RC = m_{\text{ice}} \left\{ C_{pw}(27-0) + LH + C_{pe}(0-(-5)) \right\}$$

$$RC = \boxed{106.0416 \text{ KW}}$$

(i) Ans

Now, from table

$$h_1 = 1426 \text{ kJ/kg}$$

$$h_{2a} = 1471$$

$$h_3 = h_4 = 347.5$$

$$s_1 = 5.549 \text{ kJ/kgK}$$

$$s_{2a} = 4.930$$

$$s_2 = s_1 = 5.549 = s_{2a} + C_{pg} \ln \left(\frac{T_2}{T_{2a}} \right)$$

$$\Rightarrow T_{2a} = 384.203 \text{ K}$$

$$h_{2a} = h_{2a} + C_{pg}(T_{2a} - T_{2a})$$

$$h_{2a} = 1684.3684$$

(12)

Now,

$$RC = m(h_1 - h_4)$$

$$\Rightarrow \boxed{m = 0.0983 \text{ kg/s}} \quad (ii) \text{ Ans.}$$

Now,

$$\eta_C = 0.82 = \frac{T_{2a} - T_1}{T_2 - T_1}$$

$$\Rightarrow T_2 = 400.93 \text{ K}$$

$$q_2 = q_{1a} + c_p g (T_2 - T_{1a})$$

$$q_2 = 1731.204$$

$$\dot{W}_{\text{compressor motor}} = \frac{m (h_2 - h_1)}{\eta_{\text{motor}}}$$

$$\boxed{\dot{W}_{\text{compressor motor}} = 31.916 \text{ kW}} \quad (\text{iii) Ans} \quad \times$$

$$\eta_{\text{relative}} = \frac{(\text{COP})_{\text{Actual}}}{(\text{COP})_{\text{ideal}}} = \frac{\cancel{m h_{12}}}{\cancel{m (h_2 - h_1)}} \quad \cancel{\text{Ans}}$$

$$(\text{COP})_{\text{Actual}} = \frac{RC}{(W)_{\text{compressor motor}}} = 3.3225 \quad \checkmark$$

$$(\text{COP})_{\text{ideal}} = \frac{RC}{m(h_{2s} - h_2)} = 4.1752 \quad \times$$

$$\eta_{\text{relative}} = 0.7957 \quad \times$$

\therefore Relative efficiency will be 79.57% of ideal

Q.7 (b)

Calculate the temperature difference between outer and inner surface of a thin hollow tube having 4 mm and 6 mm inside and outside radius, respectively, when a current of 2.1 kA flows through it. For cooling the tube, the coolant water at temperature 20°C circulates inside the tube. The heat transfer coefficient of water side is 12500 W/m²K. The outer surface of the tube is insulated. The electrical resistivity of material is 0.11 Ωmm²/m. The thermal conductivity of the material is 18 W/m²K. Find the heat flow rate. Also obtain the expression for temperature difference between inner and outer radius.

[20 marks]

$$r_i = 0.004 \text{ m}$$

$$r_o = 0.006 \text{ m}$$

$$I = 2.1 \times 10^3 \text{ A}$$

$$\text{Electrical Resistivity} (\rho) = 0.11 \frac{\Omega \text{ mm}^2}{\text{m}}$$

$$K = 18 \text{ W/m}^2 \text{ K}$$

Outer surface insulated

$$h_i = 12500 \text{ W/m}^2 \text{ K}$$

$$T_{CO} = T_{Ci} = 20^\circ \text{C}$$

Given:

- Outer surface insulated.

Assume
if Length of tube be 1 m

$$R_{elec} = \frac{\rho l}{A} = \frac{0.11 \times 1}{\pi (0.006^2 - 0.004^2)} = 1.75 \times 10^{-3} \Omega/\text{m}$$

$$\text{Heat generated} = Q = I^2 R_{elec}$$

$$Q = 7720.606 \text{ W/m} \quad \rightarrow \text{Heat flow rate.}$$

Now.

$$\frac{Q}{2\pi K l} \frac{1}{h_i A_i} \rightarrow 20^\circ \text{C}$$

10

$$R_1 = \frac{\ln(\frac{r_2}{r_1})}{2\pi k e} = 0.00358$$

$$R_2 = \frac{1}{R_1 A_l} = 0.15707$$

$$R_{net} = R_1 + R_2 = 0.16065$$

~~Q~~

$$Q = \frac{T_0 - 20^\circ}{R_{net}}$$

$$\boxed{T_0 = 1260^\circ + 315^\circ C}$$

X

~~$$Q = \frac{T_0 - T_i}{\frac{2\pi k}{\ln(\frac{r_2}{r_1})}}$$~~

~~$$T_0 - T_i = Q (2\pi k)$$~~

$$T_0 - T_i = Q \frac{\ln(\frac{r_2}{r_1})}{2\pi k e} =$$

$$T_i = 1232.875^\circ C$$

$$\boxed{T_0 - T_i = 27.64^\circ C}$$

X

Refer Solution

2000.00 $(\frac{1}{3} \times 10^3)$ m/s
 $\therefore 2000.00 = \frac{1}{3} \times 10^3$

2000.00 = 333.33

$100 \text{ m} = 3.3333 \times 10^2$

$\frac{100}{3.3333} = 30 \text{ s}$

$P = 216 \times 0.01 = 2.16$

$\therefore P = 2.16 \text{ J}$

$(\frac{1}{3} \times 10^3) \text{ m/s}$
 $\therefore 100 \text{ m} = 3.3333 \times 10^2$

$(100)^2 \times 0.01 = 30 \text{ s}$

$\therefore 2.16 \times 10^2 = 216 \text{ J}$

- 7 (c) Two vessels, A and B both containing nitrogen, are connected by a valve which is opened to allow the contents to mix and achieve an equilibrium temperature of 25°C. Before mixing the following information is known about the gases in the two vessels.

	Pressure	Temperature	Content
Vessel 'A'	1.2 MPa	55°C	3.5 kg
Vessel 'B'	0.7 MPa	22°C	2.4 kg

Calculate the final equilibrium pressure and the amount of heat transferred to the surroundings. If the vessel had been perfectly insulated. Calculate the final temperature and pressure which would have been reached. Take $\gamma = 1.4$

[20 marks]

Case I: Vessel is not insulated.

Assumption

$$T_f = 25^\circ\text{C} = 298\text{ K}$$

$$\cancel{\bullet} \quad \textcircled{A} \rightarrow \textcircled{1} \quad \& \quad \textcircled{B} \rightarrow \textcircled{2}$$

i) Nitrogen gas is an ideal gas.

$$V_1 + V_2 = V_f$$

$$\cancel{\bullet} \quad \frac{m_1 R T_1}{P_1} + \frac{m_2 R T_2}{P_2} = \frac{(m_1 + m_2) R T_f}{P_f}$$

$$\Rightarrow P_f = 0.89335 \text{ MPa}$$

$$P_f = 893.35 \text{ kPa}$$

20

$$\cancel{\bullet} \quad \Delta Q = \Delta U + \cancel{W_{\text{gas}}^0}$$

$$\Delta U = m_1 C_V (T_f - T_1) + m_2 C_V (T_f - T_2)$$

$$\cancel{\bullet} \quad C_V = \frac{R}{m \gamma - 1} = 0.742$$

$$\Delta U = -72.5676 \text{ kJ}$$

$$\boxed{\Delta Q = -72.5676 \text{ kJ}}$$

$\therefore 72.5676 \text{ kJ}$ heat is released to the surroundings due to mixing.

Case II Vessel is Perfectly insulated.

$$\Rightarrow \Delta Q = 0 = \Delta U + \Delta Q_{\text{gas}}$$

$$\Rightarrow \Delta U = 0$$

$$m_1 C_V (T_f - T_1) + m_2 C_V (T_f - T_2) = 0$$

$$T_f = \frac{m_1 T_1 + m_2 T_2}{m_1 + m_2}$$

$$T_f = 314.576 \text{ K}$$

$$V_1 + V_2 = V_f$$

$$\frac{m_1 R T_1}{P_1} + \frac{m_2 R T_2}{P_2} = \frac{(m_1 + m_2) R T_f}{P_f}$$

$$\Rightarrow P_f = 0.94304 \text{ MPa}$$


$$P_f = 943.04 \text{ kPa}$$

3 (a) A simply supported beam beam of span L carries a uniformly distributed load W per unit length on the whole span. Find the shape of beam of uniform strength, if

- (i) the width is to be maintained constant, and
- (ii) the depth is to be maintained constant.


Also, determine depth in case (i) and width in case (ii) at the mid-span. Take permissible bending stress of beam as σ_{per} .


[20 marks]

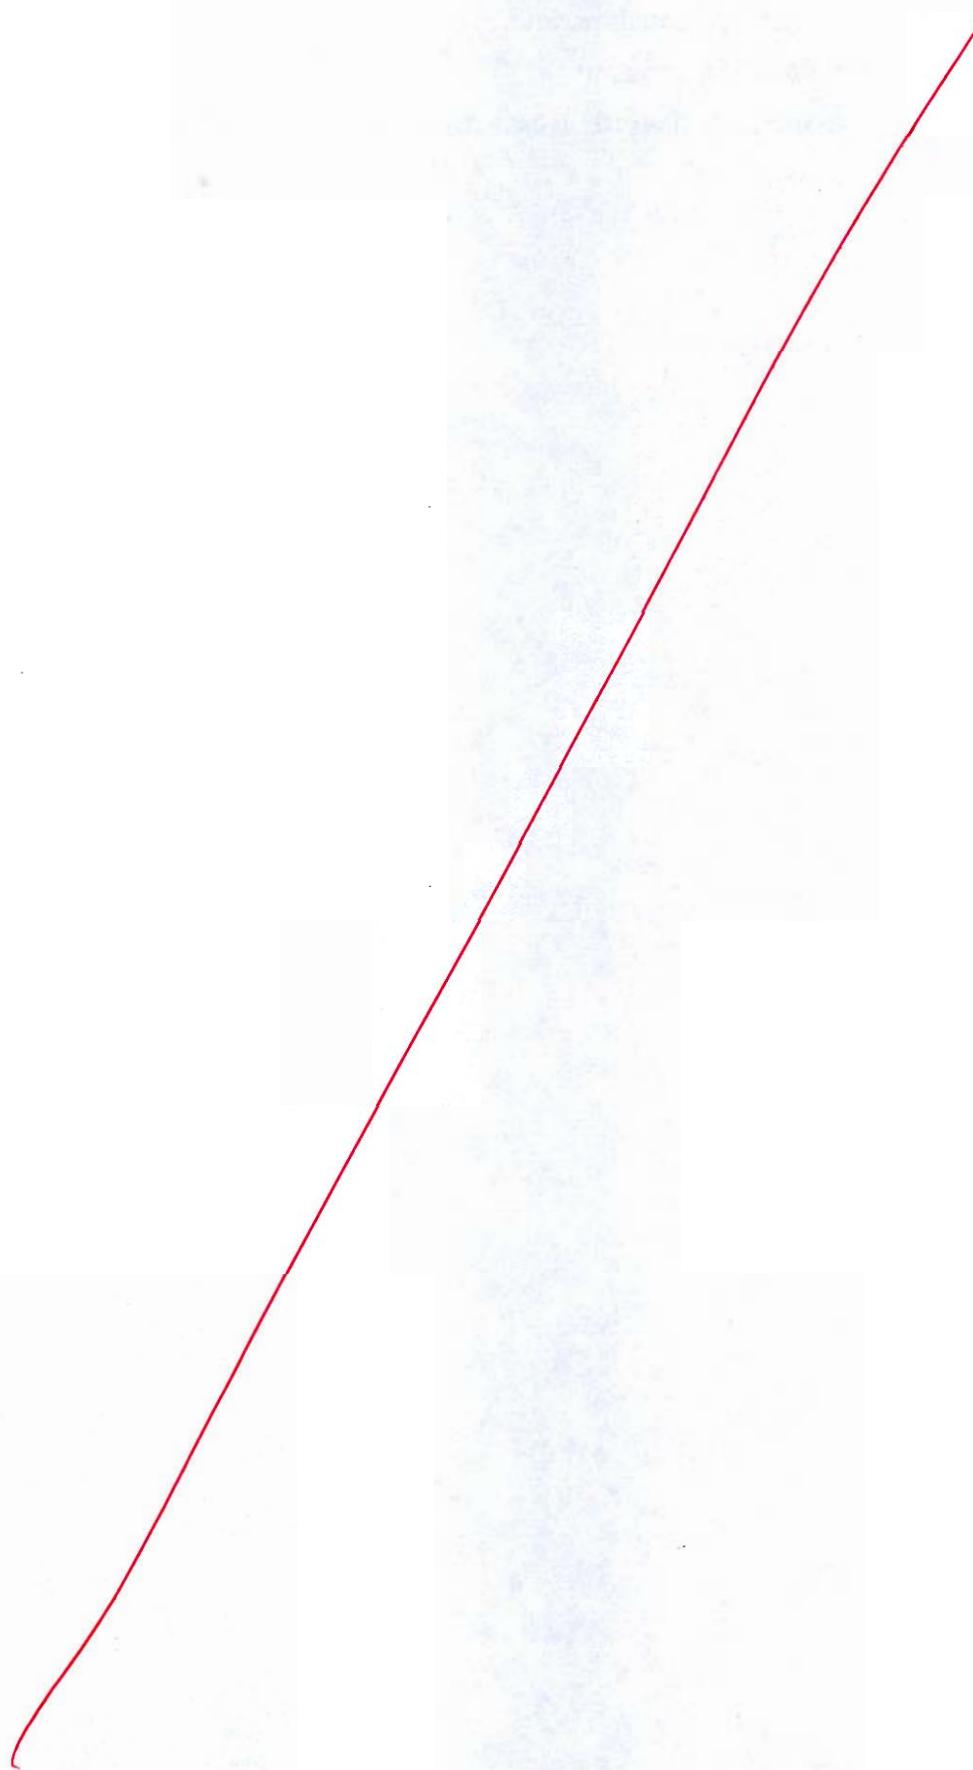

-8 (b)

- (i) Explain harmful effects of R-12 and R-22 refrigerant. Also suggest new eco-friendly substitutes of these two refrigerants.
- (ii) Define availability of a thermodynamic system. Also, derive the expression for availability function or availability for a non flow process.

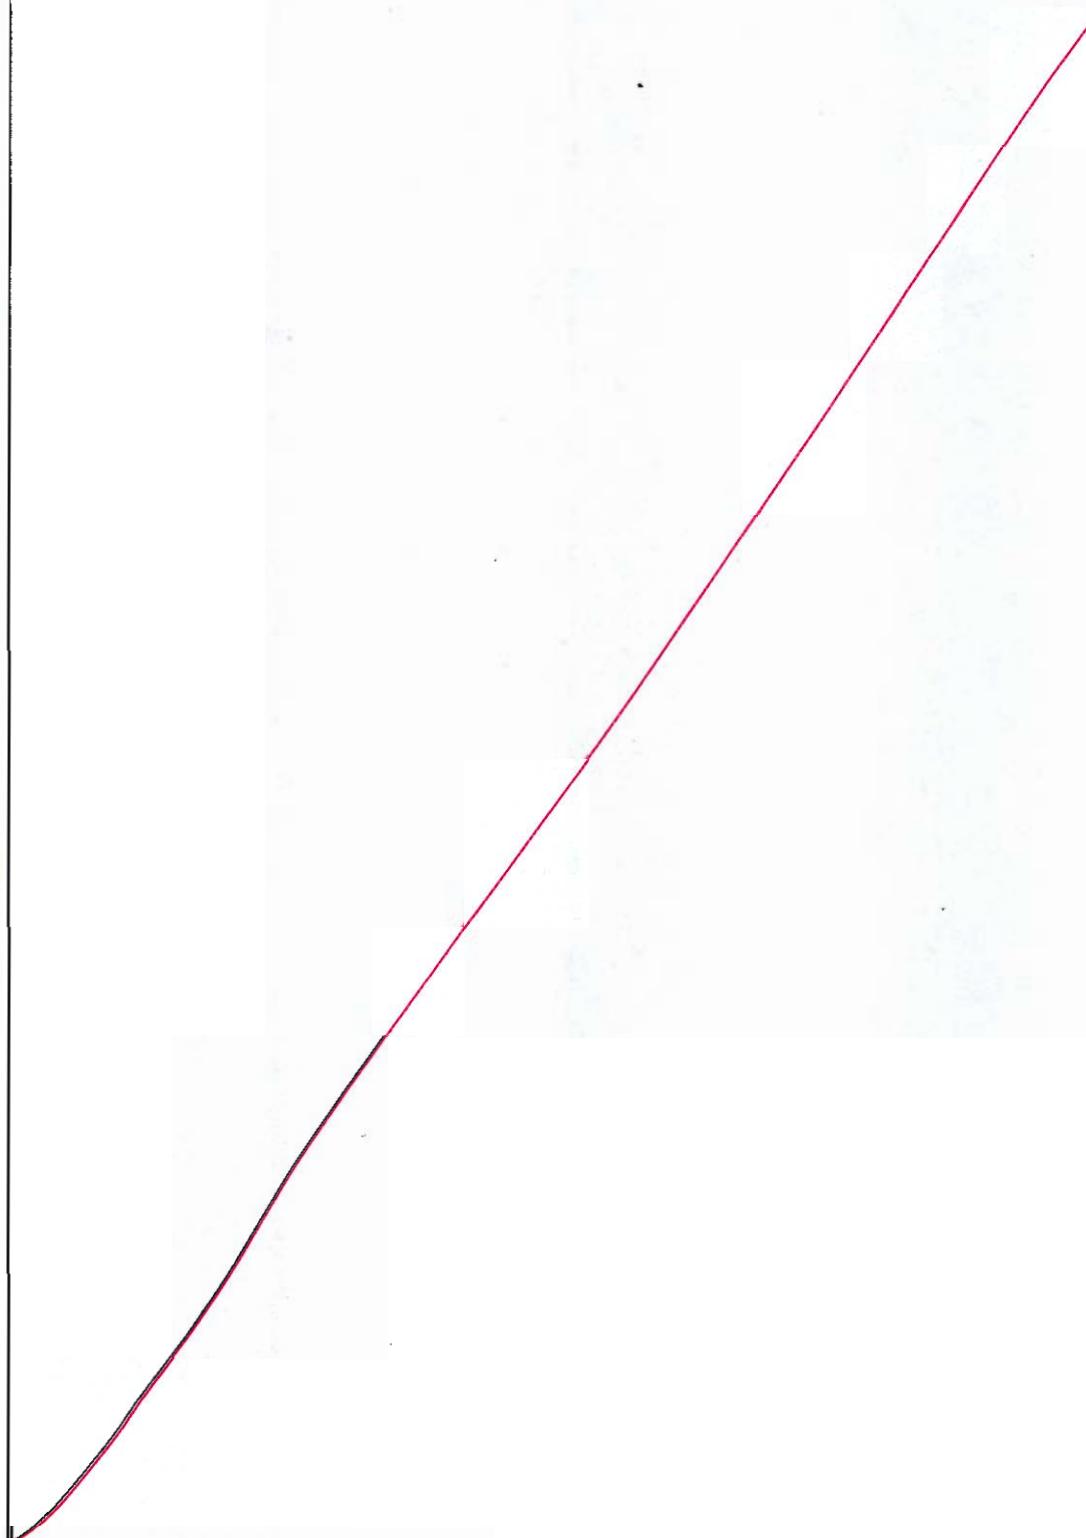[10 + 10 marks]

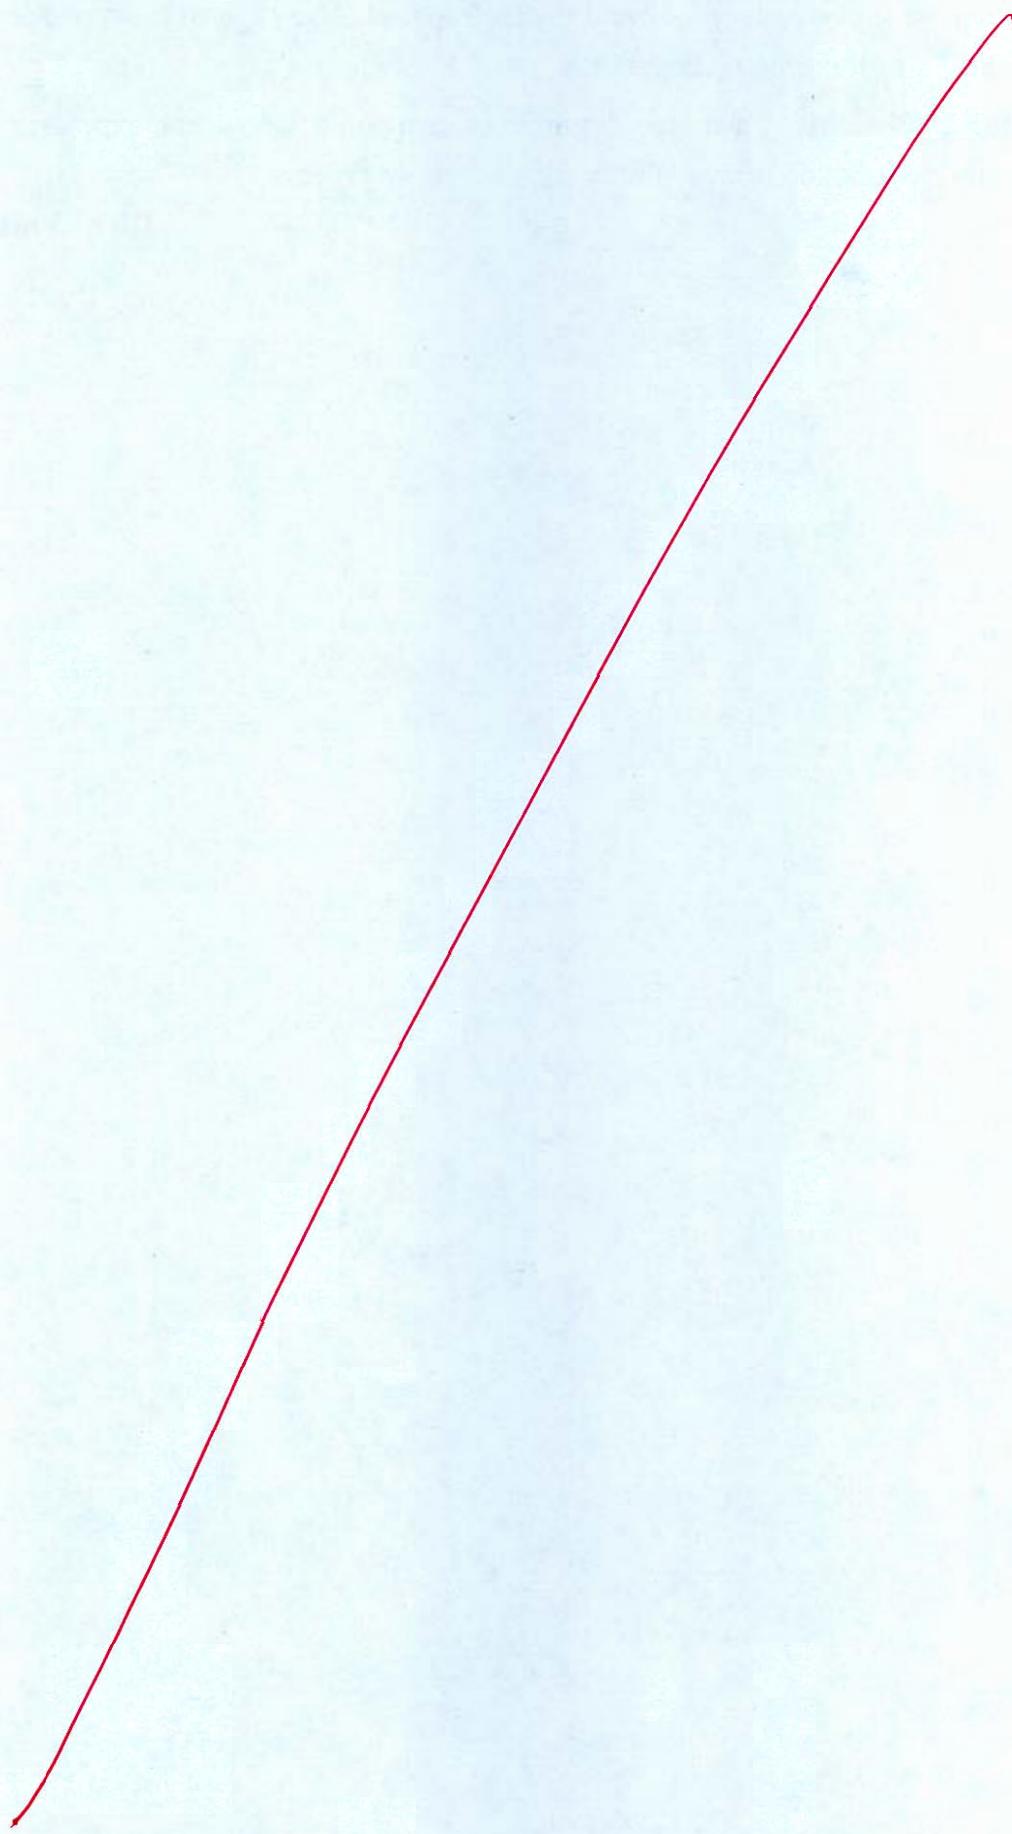


.8 (c) Air at 22°C and at atmospheric pressure flows at a velocity of 4.8 m/s past a flat plate with a sharp leading edge. The entire plate is maintained at a temperature of 58°C . Assuming that transition occurs at critical Reynolds number of 5×10^5 , find the distance from the leading edge at which the boundary layer changes from laminar to turbulent. At the location also calculate:

- (i) Thickness of hydrodynamic boundary layer
- (ii) Thickness of thermal boundary layer
- (iii) Local and average convective heat transfer coefficient
- (iv) Heat transfer from both side of plate per unit width of plate
- (v) Mass entrainment in the boundary layer


Assume cubic velocity profile and approximate method. Thermo-physical properties of air at mean film temperature of 40°C are: $\rho = 1.128 \text{ kg/m}^3$; $v = 16.96 \times 10^{-6} \text{ m}^2/\text{s}$; $k = 0.02755 \text{ W/mK}$; $\text{Pr} = 0.7$

[20 marks]

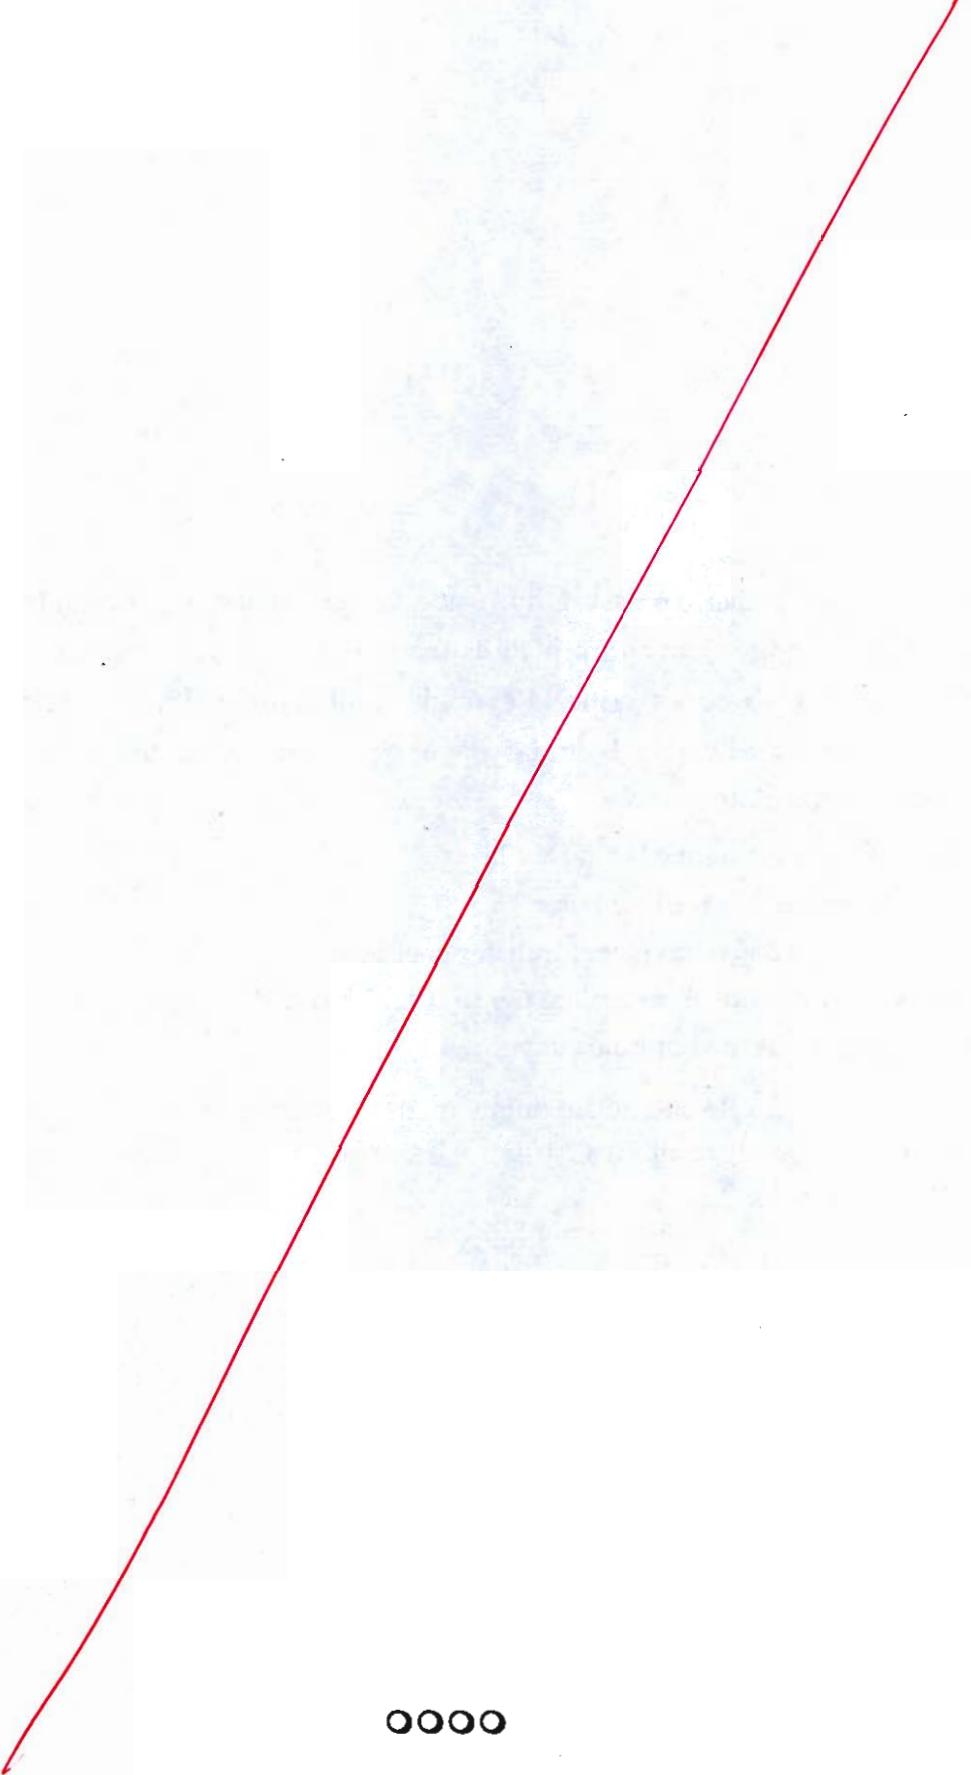


oooo


Space for Rough Work



Space for Rough Work




Space for Rough Work

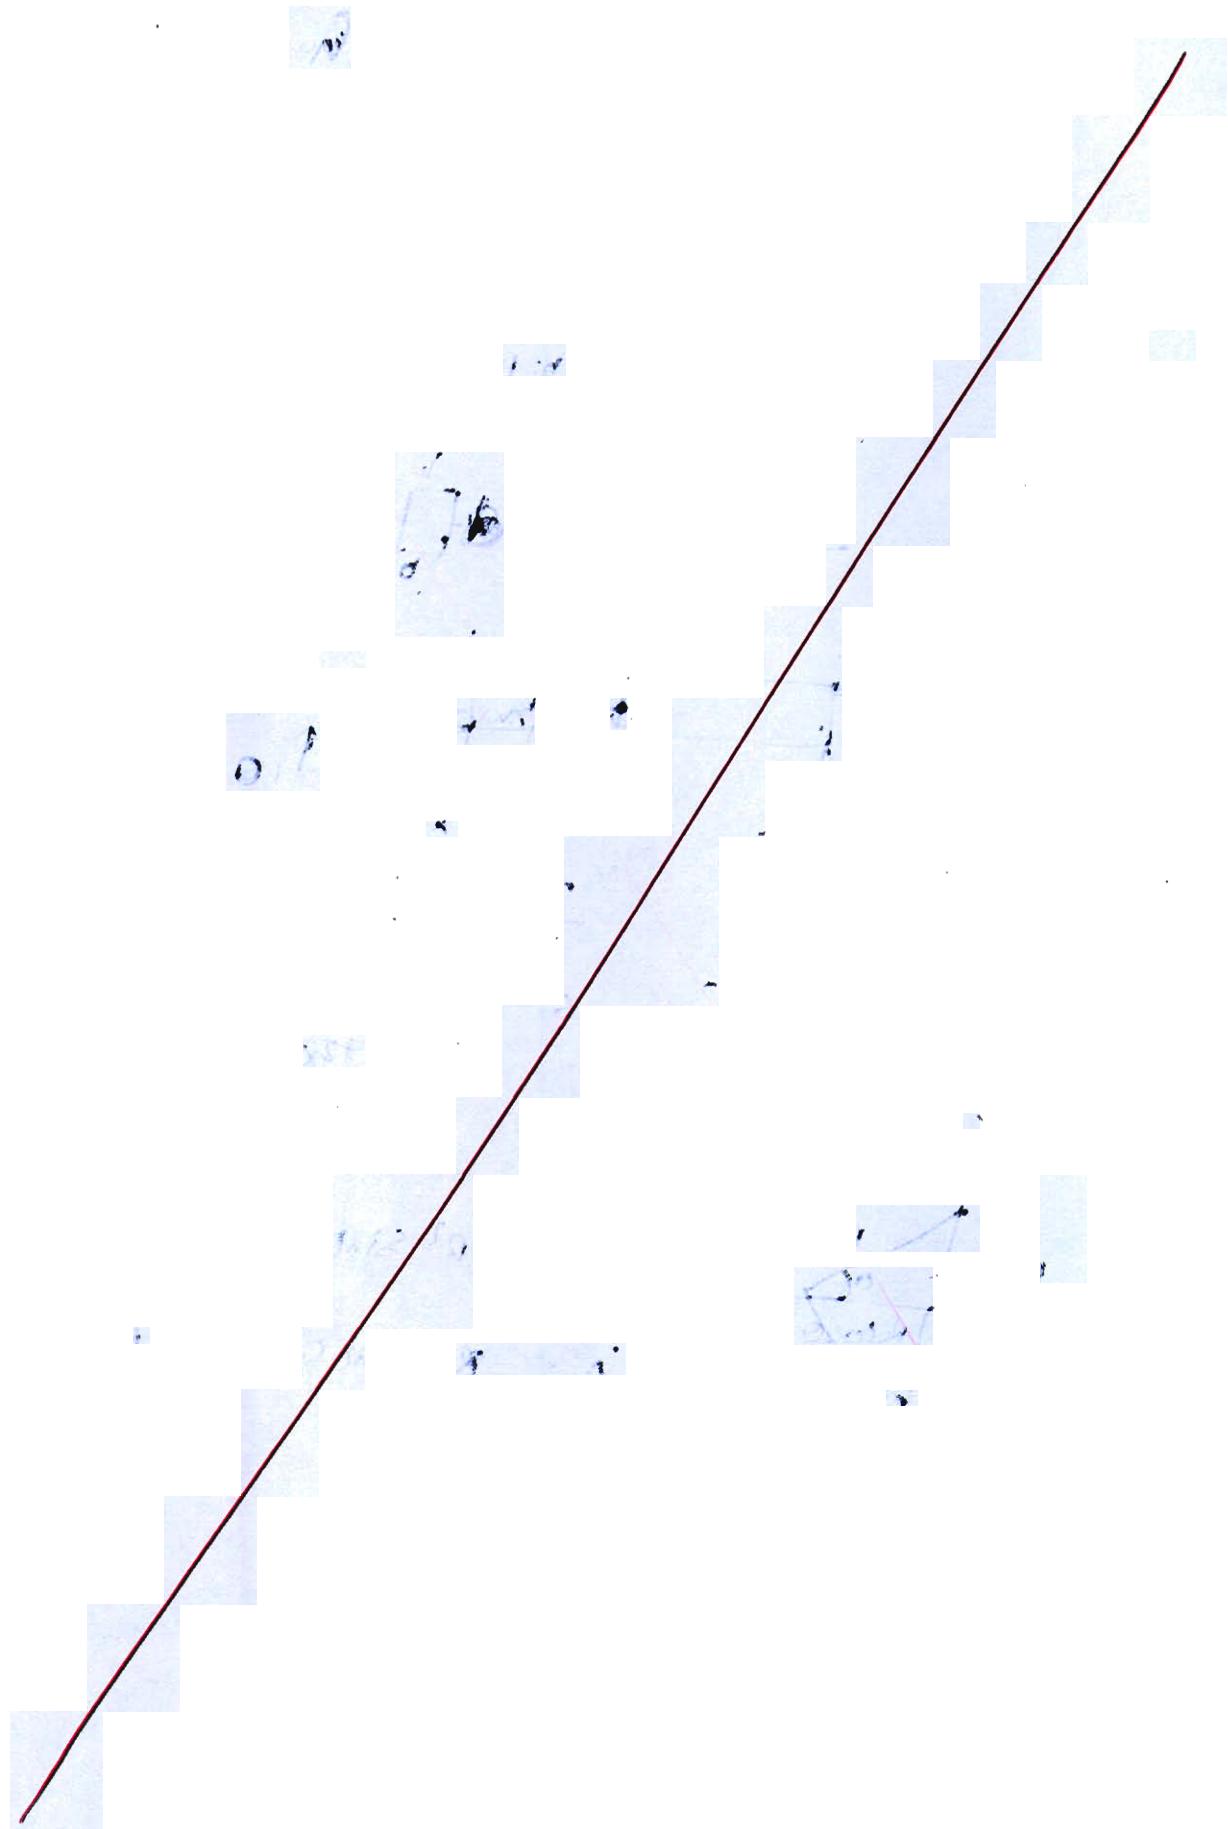

Space for Rough Work

$$\phi = \phi_0 - T_0 s \cdot p V$$

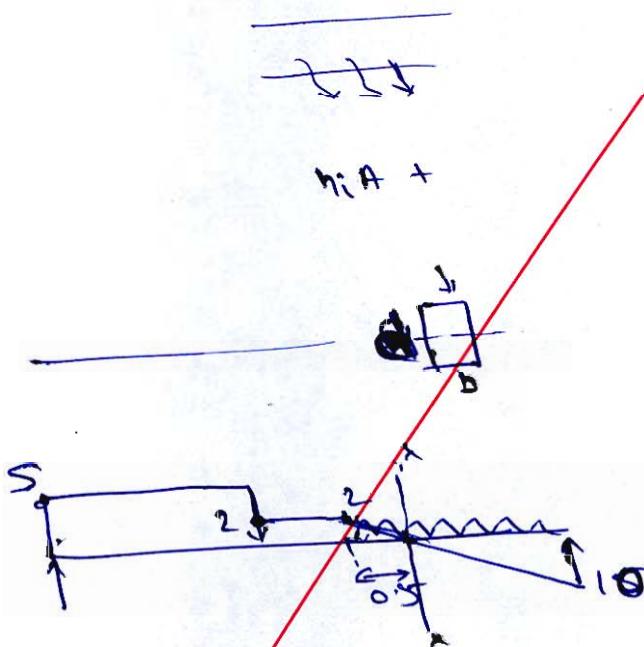


$$\frac{2}{x} = \frac{10}{3-x}$$

$$6 - 2x = 10x$$

$$6 = 12x$$

$$x = 0.5$$

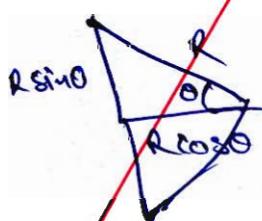

$$\Delta = \frac{1}{2} R^2 \sin \theta \cos \theta = 1$$

$$\Delta = R^2 \sin \theta \cos \theta = \frac{R^2 \sin 2\theta}{2}$$