

# ESE

# MADE EASY workbook 2022



Detailed Explanations of  
**Try Yourself Questions**

---

## Electronics Engineering Materials Science



**MADE EASY**  
Publications

© Copyright: Subject matter to MADE EASY Publications, New Delhi. No part of this book may be reproduced or utilised in any form without the written permission.

# 1

## Crystalline Structures

**T1. (a)**

**T2. (d)**

Intercepts made by plane on 3 axis

$$\Rightarrow -A, \frac{B}{3}, \infty$$

∴ Miller indices

$$\Rightarrow -1, 3, 0$$



# 2

## Dielectric Properties of Materials

**T1. (b)**

**T2. (d)**

$$V = gtP = 12 \times 10^{-3} \times 2 \times 10^{-3} \times 0.5 \times 10^6 = 12 \text{ V}$$

**T3. (d)**

Permanent dipole moment

= 1.04 debye unit

=  $1.04 \times 3.33 \times 10^{-30}$  coulomb-metre

Boltzmann constant K =  $1.38 \times 10^{-23}$  J/K

Room temperature T = 300 K

$$\alpha_0 = \frac{P_p^2}{3kT} = \frac{(1.04 \times 3.33 \times 10^{-30})^2}{3 \times 1.38 \times 10^{-23} \times 300} = 0.966 \times 10^{-39} \text{ Farad-meter}^2$$

$$N = 10^{27} \text{ m}^{-3}$$

$$E = 10^6 \text{ V/m}$$

So orientational polarisation

$$\begin{aligned} P_0 &= N\alpha_0 E \\ &= 10^{27} \times 0.966 \times 10^{-39} \times 10^6 \\ &= 0.966 \times 10^{-6} \text{ Coulomb meter}^{-2} \end{aligned}$$


**T4. (a)**

$$\tan \delta = \frac{\epsilon''}{\epsilon'} = 5 \times 10^{-4}$$

$$\therefore \epsilon'' = 10.5 \times 10^{-4} = 1.05 \times 10^{-3}$$

**T5. (c)**

In an insulating material connected to an a.c. signal, the dielectric constant and atomic polarisation decrease with frequency.

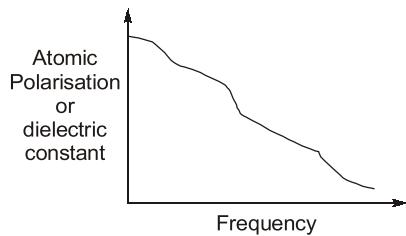

**T6. (c)**

Total polarizability

$$\alpha = \alpha_e + \alpha_i + \alpha_0$$

where  $\alpha_e = 4\pi\epsilon_0 R^3$  = electronic polarizability

$\alpha_i$  = ionic polarizability

$$\alpha_0 = \frac{p_p^2}{3kT} = \text{orientational polarizability}$$

We see that orientational polarizability depends on the temperature.

$E$  increases  $\rightarrow$  radius  $R$  increases

$R$  increases  $\rightarrow \alpha_e$  increases



# 3

## Magnetic Properties of Materials

**T1. (d)**

**T2. (b)**

**T3. (c)**

**T4. Sol.**

Data:  $H = 10^6 \text{ A/m}$ ,  $T = 300 \text{ K}$

$\mu_B = \text{Bohr magneton} = 9.27 \times 10^{-24}$

$$\text{Magnetic moment} = \frac{\mu_0 H \mu_B}{kT} = \frac{1.257 \times 10^{-6} \times 10^6 \times 9.27 \times 10^{-24}}{1.38 \times 10^{-23} \times 300}$$

$$M_{300} = 2.81 \times 10^{-3} \mu_B$$

$$M_{4.2} = 0.2 \mu_B$$

**T5. (b)**

Intensity of magnetization =  $\frac{\text{Total magnetic moment}}{\text{Volume}}$

Magnetic moment =  $2.5 \text{ A-m}^2$

$$\text{Volume} = \frac{\text{Mass}}{\text{Density}} = \frac{6.6 \times 10^3}{7.9 \times 10^3} = 0.835 \text{ m}^3$$

$$\text{Intensity} = \frac{2.5}{0.835} \approx 2.99 = 3 \text{ A/m}$$

**T6. (a)**

Permanent magnetic materials are those which retain a considerable amount of their magnetic energy after the magnetizing force has been removed, i.e. the materials which are difficult to demagnetize. Therefore for a permanent magnetic material, the residual induction and coercive field should be large.

**T7. (d)**

Magnetic materials which have low coercive field are known as soft materials. Permanent magnets are made of hard materials which have a broad hysteresis loop (large coercive force), so that they are not subject to self-demagnetisation.

Also, ferrimagnetic material such as ferrites do not have eddy current loss.

**T8. (b)**

Because cast iron has lower permeability than silicon steel.



# 4

## Conductive Materials and Superconductors

**T1. (c)**

**T2. (c)**

$$H_c = 64 \times 10^3 \left[ 1 - \left( \frac{5}{7.26} \right)^2 \right] = 33.64 \times 10^3 \text{ Amp/m}$$

**T3. Sol.**

Relevant equations are

$$(i) v_d = \frac{J}{n \times e} = \frac{I}{Ane};$$

$$(ii) \lambda = T_c \bar{v};$$

$$(iii) T_c = \frac{\lambda}{\bar{v}} = \frac{m}{ne^2 \rho}$$

The number of conduction electrons per  $\text{m}^3 = n$

$$n = \frac{N_d \times \rho \times n_a}{\text{Cu Atomic wt.}} = \frac{6.023 \times 10^{23} \times 8960 \times 1}{63.54} = 8.5 \times 10^{25}/\text{m}^3$$

$$\begin{aligned} \text{The drift speed } v_d &= \frac{J}{ne} = \frac{I}{Ane} = \frac{10}{(\pi r^2)n \times e} \\ &= \frac{10}{\pi(0.08)^2 \times 10^{-4} \times 8.5 \times 10^{25} \times 1.602 \times 10^{-19}} \\ &= 0.365 \text{ m/sec} \end{aligned}$$

$$\text{Mean free collision time } T_c = \frac{\lambda}{\bar{v}} = \frac{m}{ne^2 \rho}$$

$$\begin{aligned} T_c &= \frac{9.1 \times 10^{-31}}{8.5 \times 10^{25} \times (1.602 \times 10^{-19})^2 \times 2 \times 10^{-8}} [\rho = 2 \times 10^{-8} \text{ ohm-metre at } 20^\circ\text{C}] \\ &= 2.086 \times 10^{-11} \text{ sec} \end{aligned}$$

$$\lambda = T_c \times \bar{v} = 2.086 \times 10^{-11} \times 1.6 \times 10^6 = 3.34 \times 10^{-5} \text{ m}$$

**T4. (b)**

$\chi = \mu_r - 1$ , for superconductor  $\mu_r = 0$  which is referred as perfect diamagnetism.

