



GATE 2026

Civil Engineering-1

Forenoon Session

Detailed Solutions

Exam held on 14-02-2026

MADE EASY Corporate Office:

44-A/1, Kalu Sarai, Near Hauz Khas Metro Station, New Delhi-110016

Centres : Delhi, Hyderabad, Jaipur, Bhopal, Pune | www.madeeasy.in | **Ph:** 9021300500

SECTION - A


GENERAL APTITUDE

- Q.1 'The shopkeeper sells lemons.'
In this sentence, the word 'lemons' is the
- (a) object (b) subject
(c) predicate (d) verb

Ans. (a)
A shopkeeper sells lemons
Subject Verb Object

End of Solution

- Q.2 The figure below is supposed to show three non-overlapping shapes - one oval and two triangles. Which one of the following figures P, Q, R, or S fits the missing portion indicated by '?' and completes the oval and the two triangles?

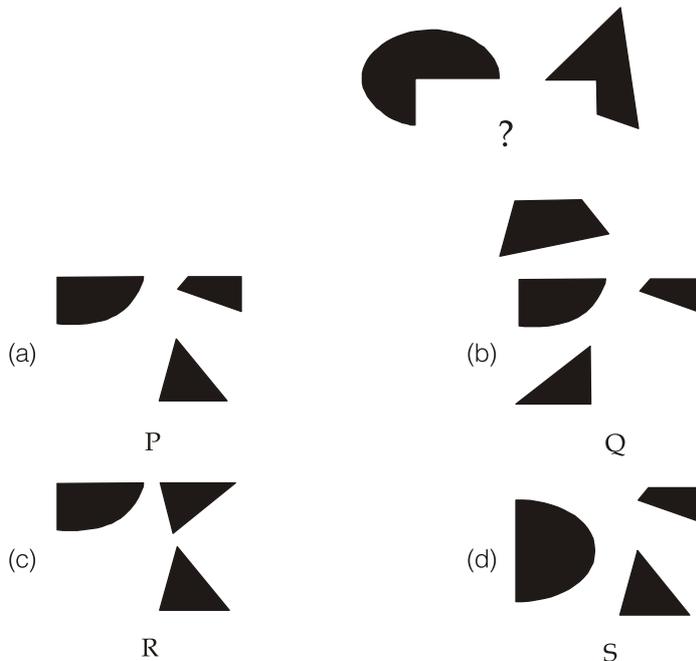


Ans. (a)

End of Solution

- Q.3 At how many points will the curves $y = x^2$ and $y = -x^2 - 2x - 1$ intersect in the real (x, y) plane?
- (a) 0 (b) 1
(c) 2 (d) 3

Ans. (a)

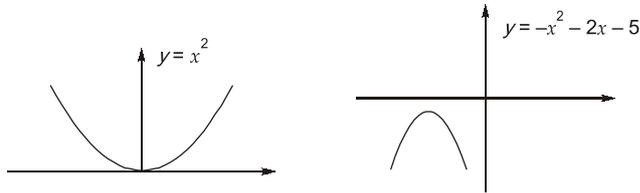

No intersection points,

$$y = x^2$$

Always positive

$$y = -x^2 - 2x - 5$$

Always negative

End of Solution

Q.4 'If Anish had scored hundred runs in today's match, he would have been made the captain of his team. He would have then become the youngest captain in his team's history. Unfortunately, he got out without scoring any runs. Hence, there won't be any change in the captaincy for now.'

Based on the paragraph above, which one of the following statements is true?

- (a) Anish made hundred runs but was denied captaincy.
- (b) Anish was the captain of his team before the game today.
- (c) The current captain is older than Anish.
- (d) Anish is the youngest player in his team.


Ans. (c)

As in question it is mentioned.


He would have become the youngest captain, so the current captain is older than Anish.

End of Solution

Q.5 Which one of the following figures P, Q, R, or S, correctly shows the 45° clockwise-rotated version of figure (I)?




(I)





(a)

P



(b)

Q



Ans. (b)

End of Solution

Q.6 Match the words in **Column I** with their synonyms in **Column II**.

Column I

- (i) Lonely
- (ii) Literal
- (iii) Lousy
- (iv) Lethal

Column II

- (p) Verbatim
- (q) Solitary
- (r) Deadly
- (s) Terrible


- (a) (i)-(q); (ii)-(p); (iii)-(s); (iv)-(r)
- (b) (i)-(q); (ii)-(s); (iii)-(r); (iv)-(p)
- (c) (i)-(s); (ii)-(p); (iii)-(q); (iv)-(r)
- (d) (i)-(r); (ii)-(s); (iii)-(p); (iv)-(q)

Ans. (a)

- Lonely → Solitary
- Literal → Verbatim
- Lousy → Terrible
- Lethal → Deadly

End of Solution

Q.7 In the given figure, \overline{PQ} is the diameter of a circle with center O . Two points R and S are chosen on the circle such that $\angle ROS = 80^\circ$. When \overline{PR} and \overline{QS} are extended, they meet at T . The value of $\angle RTS$ is _____.

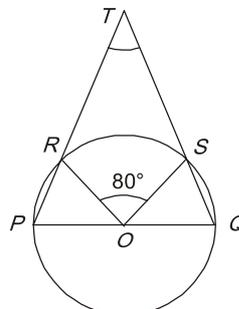

- (a) 40°
- (b) 50°
- (c) 60°
- (d) 80°

Ans. (b)

$$\frac{1}{2}(180^\circ - 80^\circ) = 50^\circ$$

End of Solution

Q.8 Based on the relationship between each polygon and the number inside it, the value of 'X' is _____



- (a) 720 (b) 596
 (c) 24 (d) 240

Ans. (a)


No. of sides = 3
 $3! = 6$
 No. of sides = 4
 $4! = 24$
 No. of sides = 5! = 120
 No. of sides = 6! = 720

End of Solution

Q.9 Consider a linear arrangement of seven bulbs, each of which can be in the ON or OFF states. The initial configuration of the bulbs is shown in the figure. In every Step, the states of the bulbs are changed based on the following rules:

- Any OFF bulb with exactly one ON neighbor at the end of the previous Step is turned ON.
- Any ON bulb with both neighbors ON at the end of the previous Step is turned OFF.
- The state of any bulb not meeting the conditions above is left unchanged.

The state of bulbs at the end of Step 1 and Step 2 are also shown in the figure. The number of bulbs which are ON at the end of Step 8 is _____

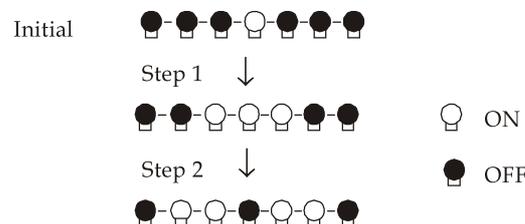

- (a) 5 (b) 4
 (c) 3 (d) 0



Ans. (b)

Step (1) OFF, OFF, ON, ON, ON, OFF, OFF

Step (2) OFF, ON, ON, OFF, ON, ON, OFF

Step (3) ON, ON, ON, OFF, ON, ON, ON

Step (4) ON, OFF, ON, OFF, ON, OFF, OFF

No change possible.

End of Solution

Q.10 P and Q are two positive integers such that $P^2 = Q^2 + 13$.

The product of the numbers P and Q is _____

(a) 13

(b) 26

(c) 39

(d) 42

Ans. (d)

$$[P^2 - Q^2] = 13$$

$$(P - Q)(P + Q) = 13 = 1 \times 13$$

$$P - Q = 1$$

$$P + Q = 13$$

$$P = 7$$

and

$$Q = 6$$

$$P \times Q = 42$$

End of Solution



Announcing
**Classroom Courses &
Live-Online Courses** for

**GATE
2027**

**ESE
2027**

Salient Features :

- ✓ Classes by experienced & renowned faculties.
- ✓ Systematic subject sequence & timely completion.
- ✓ Comprehensive & updated books (Optional).
- ✓ Efficient teaching with comprehensive coverage.
- ✓ Regular performance assessment through class tests.
- ✓ Facility for doubt removal.
- ✓ Concept practice through workbook solving.
- ✓ Exam oriented learning ecosystem.
- ✓ Proper notes making & study concentration.
- ✓ Similar teaching pedagogy in offline & online classes.



**Classroom Courses
at Delhi**

**19 Feb 2026 &
05 Mar 2026**



**Live-Online
Courses**

**20 Feb 2026 &
11 Mar 2026**



Scan to enroll

Streams: CE, ME/PI, EE, EC/IN, CS

Admissions Open | More batches to be announced in Apr, May & June

Delhi Centre : 44-A/1, Kalu Sarai, Near Hauz Khas Metro Station, New Delhi-110016 • Ph: 9021300500

MADE EASY Centres : Delhi | Bhopal | Hyderabad | Jaipur | Pune www.madeeasy.in

SECTION - B

TECHNICAL

Q.11 Matrix P is given as

$$P = \begin{bmatrix} 1 & 0 & 1 \\ 0 & 1 & 0 \\ 1 & 0 & 1 \end{bmatrix}$$

The TRUE option is

- (a) Trace of P is equal to the sum of the Eigen values of P.
- (b) $P^T P$ is an identity matrix.
- (c) P is a skew-symmetric matrix.
- (d) Absolute magnitude of each Eigen value is 1.

Ans. (a)

$$P^T = \begin{bmatrix} 1 & 0 & 1 \\ 0 & 1 & 0 \\ 1 & 0 & 1 \end{bmatrix}$$

$$P^T P = \begin{bmatrix} 1 & 0 & 1 \\ 0 & 1 & 0 \\ 1 & 0 & 1 \end{bmatrix} \begin{bmatrix} 1 & 0 & 1 \\ 0 & 1 & 0 \\ 1 & 0 & 1 \end{bmatrix} = \begin{bmatrix} 2 & 0 & 2 \\ 0 & 1 & 0 \\ 2 & 0 & 2 \end{bmatrix}$$

$P^T P \neq I$ (\therefore Not an identity matrix)

$P^T = P$ (\therefore Symmetric and not skew symmetric)

$$|A - \lambda I| = 0$$

$$\begin{vmatrix} 1-\lambda & 0 & 1 \\ 0 & 1-\lambda & 0 \\ 1 & 0 & 1-\lambda \end{vmatrix} = (1-\lambda)\lambda(\lambda-2) = 0$$

$$\lambda = 0, 1, 2$$

End of Solution

Q.12 Given

$$\begin{bmatrix} 1 & 1 & 1 \\ 1 & 0 & 2 \end{bmatrix} \begin{Bmatrix} x_1 \\ x_2 \\ x_3 \end{Bmatrix} = \begin{Bmatrix} 0 \\ 0 \end{Bmatrix}$$

The above system of equations represents a

- (a) plane
- (b) line
- (c) volume
- (d) point

Ans. (b)

$$x_1 + x_2 + x_3 = 0$$

$$x_1 + 2x_3 = 0$$

Let,

$$x_2 = \alpha$$

$$x_1 + x_3 = -\alpha$$

$$x_1 + 2x_3 = 0$$

$$x_3 = \alpha$$

$$x_1 = -2\alpha$$

$$x = \begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix} = \begin{bmatrix} -2\alpha \\ \alpha \\ \alpha \end{bmatrix} = \alpha \begin{bmatrix} -2 \\ 1 \\ 1 \end{bmatrix}$$

It represents a line.

End of Solution

Q.13 A thin-walled spherical gas balloon of radius R and wall thickness t ($t \ll R$) is subjected to an internal (gauge) pressure p . The maximum tensile and shear stresses in the balloon wall are, respectively:

(a) Zero and $pR/2t$

(b) $pR/2t$ and Zero

(c) $pR/2t$ and $pR/4t$

(d) $pR/4t$ and Zero

Ans. (b)





$$\text{Hoop stress} = \text{longitudinal stress} = \frac{PD}{4t}$$

$$\therefore \text{Tensile stress} = \frac{P \times (2r)}{4t} = \frac{Pr}{2t}$$

and in plane shear stress = 0


End of Solution

Q.14 Black dot shown in the figure qualitatively represents the shear centre of the angle section. The option which represents the position of the shear centre is:



Ans. (d)

Shear center will lie on the axis of symmetry and at the point of intersection of axis of legs.



End of Solution

Q.15 Which one of the following is utilized to determine the long-term deformation of concrete under sustained loading?

- (a) Creep (b) Shrinkage
 (c) Modulus of rupture (d) Split tensile strength

Ans. (a)

Creep is the gradual, time-dependent deformation of a material under a constant sustained stress.

End of Solution

Q.16 Two reservoirs having different water levels are connected by two long parallel pipelines of same length and same material but having diameters of 600 mm and 400 mm. Using Darcy-Weisbach equation, the ratio of flowrate of water in the bigger diameter pipe to that in the smaller diameter pipe is

- (a) 0.54 (b) 1.22
 (c) 1.84 (d) 2.76

Ans. (d)

Given:

Diameter of larger pipe, $D_1 = 600$ mm

Diameter of smaller pipe, $D_2 = 400$ mm

∴ Pipes are connected in parallel,

∴ Headloss in both the pipes will be same.

$$h_{f1} = h_{f2}$$

$$\frac{8Q_1^2 f L_1}{\pi^2 g D_1^5} = \frac{8Q_2^2 f L_2}{\pi^2 g D_2^5}$$

$$\Rightarrow \left(\frac{Q_1}{Q_2}\right)^2 = \left(\frac{D_1}{D_2}\right)^5 \quad [\because L_1 = L_2]$$

$$\Rightarrow \frac{Q_1}{Q_2} = \left(\frac{600}{400}\right)^{5/2} = 2.755 \approx 2.76$$

End of Solution

- Q.17** An irrigation canal is to be designed to deliver 10 cumec to meet the peak demand of 7500 hectare of cropped area. The estimated canal losses are 50 % of the head discharge. The duty (in hectare/cumec) on capacity of this canal is
- (a) 375 (b) 1125
(c) 1500 (d) 1875

Ans. (a)

$$\text{Duty} = \frac{\text{Area}}{\text{Discharge}}$$

$$= \frac{7500}{10} = 750 \text{ ha/cumec}$$

$$\text{Duty at head of canal} = 750 \times 0.5 = 375 \text{ ha/cumec}$$

End of Solution

- Q.18** The name of a person in Column 1 is to be matched with the test mentioned in Column 2.

Column 1

- (I) Menard
(II) Marchetti
(III) Casagrande
(IV) Proctor

Column 2

- (P) Dilatometer test
(Q) Pressuremeter test
(R) Compaction test
(S) Liquid limit test

Option giving the CORRECT match between Column 1 and Column 2 is:

- (a) (I) – (Q); (II) – (P); (III) – (S); (IV) – (R)
(b) (I) – (R); (II) – (S); (III) – (Q); (IV) – (P)
(c) (I) – (P); (II) – (Q); (III) – (S); (IV) – (R)
(d) (I) – (R); (II) – (S); (III) – (P); (IV) – (Q)

Ans. (a)

Menard → Pressuremeter Test
Marchetti → Dilatometer Test
Casagrande → Liquid Limit Test
Proctor → Compaction Test

End of Solution

- Q.19** Corrections are applied to the basic length of the runway strip considering:
- (i) The elevation H (in m) of the airport above Mean Sea Level (MSL)
(ii) Corrected air temperature T (in °C) with respect to the standard temperature at elevation H
(iii) The effective gradient G (in %) along the length of the runway
- Respective correction applied to the basic length of the runway is:

- (a) $0.07 \times \frac{H}{300}$; $0.01 \times T$; $0.10 \times G$ (b) $0.01 \times \frac{H}{300}$; $0.07 \times T$; $0.10 \times G$
(c) $0.07 \times \frac{H}{300}$; $0.10 \times T$; $0.01 \times G$ (d) $0.10 \times \frac{H}{300}$; $0.07 \times T$; $0.01 \times G$

Ans. (a)

$$\text{Elevation correction} = 7\% \text{ per } 300 \text{ of height} = \frac{0.07}{300} \times H$$

$$\begin{aligned} \text{Temperature correction} &= 1\% \text{ per degree rise in temperature} \\ &= 0.01T \end{aligned}$$


$$\text{Gradient correction} = 20\% \text{ per } 1\% \text{ of effective gradient} = 0.20G$$

End of Solution

Q.20 The Whole Circle Bearing (WCB) of line AB is 150° . The length of AB is 100 m. The latitude and departure values, respectively, for this line are:

- (a) +86.60 ; +50.00 (b) +86.60 ; - 50.00
 (c) -86.60 ; +50.00 (d) - 86.60 ; - 50.00

Ans. (c)

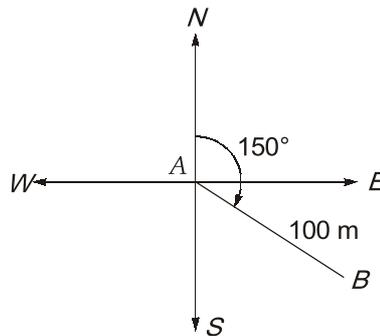

Given, $WCB = 150^\circ$, $AB = 100 \text{ m} = l$
 Latitude = $l \cos \theta = 100 \times \cos(150^\circ) = -86.60 \text{ m}$
 Departure = $l \sin \theta = 100 \times \sin(150^\circ) = +50 \text{ m}$

End of Solution

Q.21 A rapid sand filter bed of depth 0.8 m has 40 % porosity during service cycle. It is recommended that during backwash operation, the expanded filter bed should have 70 % porosity. The uniform expanded depth (in m) of the filter bed during backwash is

- (a) 1.0 (b) 1.2
 (c) 1.4 (d) 1.6

Ans. (d)

Given, $n_i = 0.4$, $n_e = 0.7$
 $D = 0.8 \text{ m}$, $D_e = ?$
 $D(1 - n)(G_s - 1) = \text{Constant}$
 $\Rightarrow 0.8 \times (1 - 0.4) = D_e \times (1 - 0.7)$
 $\Rightarrow D_e = \frac{0.8 \times 0.6}{0.3} = 1.6 \text{ m}$

End of Solution

- Q.22** The settling velocity of inorganic particles in the sedimentation tank of a water treatment plant is governed by
- (a) Darcy's law (b) Stokes' law
 (c) Dupuit's law (d) Bernoulli's law

Ans. (b)

Settling velocity of discrete inorganic particles under laminar flow conditions is determined by Stokes' law.

$$V_s = \frac{\rho g (G_s - 1) d^2}{18\mu}$$

End of Solution

- Q.23** Gradually Varied Flow (GVF) profiles in open channels given in Column 1 are to be matched with the water surface slopes in Column 2 in the table below.

Column 1 (GVF Profile)	Column 2 (Water Surface Slope)
(P) M1	(I) Positive
(Q) M2	(II) Negative
(R) M3	(III) Zero

Which of the following options is/are NOT correct?

- (a) (P) – (I) ; (Q) – (II) ; (R) – (I)
 (b) (P) – (I) ; (Q) – (II) ; (R) – (III)
 (c) (P) – (II) ; (Q) – (I) ; (R) – (I)
 (d) (P) – (I) ; (Q) – (III) ; (R) – (II)

Ans. (b, c, d)

M₁ – Positive
 M₂ – Negative
 M₃ – Positive

End of Solution

- Q.24** Cant C on a Broad Gauge railway track is calculated for an equilibrium speed V (in km/h), dynamic gauge G (in mm) and radius of curve R (in m) using formulae:

- (a) $c = \frac{GV^2}{127R}$ (b) $c = \frac{13.76V^2}{R}$
 (c) $c = \frac{13.20V^2}{R}$ (d) $c = \frac{8.33V^2}{R}$

Ans. (a, b)

For B.G. $e = \frac{GV^2}{127R}$

$$= \frac{(1.75 \times 10^3)V^2}{127R} = 13.78 \frac{V^2}{R}$$

End of Solution

- Q.25** Which of the following components is/are NOT removed in the secondary treatment of sewage?
- Suspended settleable organic solids
 - Colloids including dissolved organic matter
 - Pathogens
 - Fat and grease


Ans. (a, c, d)

- Fat and grease remove in skimming tank.
- Pathogen remove in tertiary treatment.
- Suspended settleable solids are removed in primary treatment in sedimentation.

End of Solution

- Q.26** Bag I contains 4 white and 6 black balls.
 Bag II contains 4 white and 3 black balls.
 One ball is drawn at random from any one of the two bags and it is found to be a black ball. The probability that the black ball was drawn from Bag I is _____ (rounded off to two decimal places).

Ans. (0.583)(0.50 to 0.66)



Drawn ball is black.

P (that it was drawn from bag I),

$$P\left(\frac{I}{B}\right) = \frac{P(I)P\left(\frac{B}{I}\right)}{P(I)P\left(\frac{B}{I}\right) + P(II)P\left(\frac{B}{II}\right)}$$

$$P\left(\frac{I}{B}\right) = \frac{\frac{6}{10} \times \frac{1}{2}}{\frac{1}{2} \times \frac{6}{10} + \frac{1}{2} \times \frac{3}{7}} = 0.583$$

End of Solution

- Q.27** A matrix is given as:

$$\begin{bmatrix} 9 & 15 \\ 15 & 50 \end{bmatrix}$$

By performing Cholesky decomposition, $|l_{22}|$ of the lower triangular matrix is _____ (in integer).

Ans. (5)(5 to 5)

$$\begin{aligned}
 A &= LL^T \\
 &= \begin{bmatrix} L_{11} & 0 \\ L_{21} & L_{22} \end{bmatrix} \begin{bmatrix} L_{11} & L_{21} \\ L_{21} & L_{22} \end{bmatrix} \\
 \begin{bmatrix} 9 & 15 \\ 15 & 50 \end{bmatrix} &= \begin{bmatrix} L_{11}^2 & L_{11}L_{21} \\ L_{11}L_{21} & L_{21}^2 + L_{22}^2 \end{bmatrix} \\
 L_{11} &= 3 \\
 L_{11}L_{21} &= 15 \\
 L_{21} &= 5 \\
 L_{21}^2 + L_{22}^2 &= 50 \\
 5^2 + L_{22}^2 &= 50 \\
 L_{22}^2 &= 25 \\
 L_{22} &= 5
 \end{aligned}$$

End of Solution

Q.28 It is given that x and y are integers in the following equation:

$$(x + y - 7)^2 + (y + 3x - 13)^2 = 0$$

The value of $(x^3 + y^3)$ is _____ (in integer).

Ans. (91)(91 to 91)

$$(y + 3x - 13)^2 + (x + y - 7)^2 = 0$$

Now, for sum to be 0,

$$y + 3x - 13 = 0$$

and $x + y - 7 = 0$

$$\Rightarrow y + 3x = 13$$

$$x + y = 7$$

$$2x = 6$$

$$x = 3, y = 4$$

Now, $x^3 + y^3 = (3)^3 + (4)^3$
 $= 27 + 64 = 91$

End of Solution

Q.29 The required centre-to-centre spacing of 10 mm diameter bars is 150 mm to resist the design moment in a concrete slab. Instead of 10 mm diameter bars, if 12 mm diameter bars of the same grade are used, the required centre-to-centre spacing (in mm) to resist the same design moment becomes _____ (rounded off to the nearest integer).

Ans. (216)(214 to 218)

Given, $S_{10\text{ mm}} = 150\text{ mm}, \phi = 10\text{ mm}$
 $S_{12\text{ mm}} = ?, \phi = 12\text{ mm}$

$$\begin{aligned} \therefore \quad \text{Spacing} &\propto \phi^2 \\ \frac{S_{12\text{mm}}}{S_{10\text{mm}}} &= \left(\frac{12}{10}\right)^2 \\ S_{12\text{mm}} &= 150 \times \left(\frac{12}{10}\right)^2 \\ S_{12\text{mm}} &= 216 \text{ mm} \end{aligned}$$

End of Solution

Q.30 Two steel plates are to be connected together by a 5 mm fillet weld of length 150 mm to transfer a design load. If the size of the fillet weld used to connect the same two plates is changed to 6 mm, the weld length (in mm) needed for transferring the same design load is _____ (in integer).

Ans. (125)(120 to 130)

$$\begin{aligned} \text{Here, Length of weld} &= \frac{1}{\text{Size of weld}} \\ \therefore \quad I_1 S_1 &= I_2 S_2 \\ \Rightarrow \quad 5 \times 150 &= I_2 \times 6 \\ S_2 &= 125 \text{ mm} \end{aligned}$$

End of Solution

Q.31 For a liquid, the permeability of a sandy soil having a void ratio of 0.60 was determined as 0.14 cm/s. Considering the same liquid and by using Taylor's equation, the permeability (in cm/s) of this soil corresponding to the void ratio of 0.80 is _____ (rounded off to two decimal places).

Ans. (0.30)(0.28 to 0.32)

$$\begin{aligned} \text{By Taylor's equation, } k &= C_k \frac{e^3}{1+e} \\ \text{Given: } k_1 &= 0.14 \text{ cm/s, } e_1 = 0.60; e_2 = 0.80 \\ \frac{k_2}{k_1} &= \frac{(e_2^3 / 1 + e_2)}{(e_1^3 / 1 + e_1)} \\ \frac{k_2}{0.14} &= \frac{(0.80^3 / 1 + 0.80)}{(0.60^3 / 1 + 0.60)} \\ \Rightarrow \quad k_2 &= 0.295 \text{ cm/s} \approx 0.30 \text{ cm/s} \end{aligned}$$

End of Solution



Foundation Courses for

ESE 2027

GATE 2027



Tablet Course

- Pre-loaded full fledged recorded course
- Android OS based 10.5 inch Samsung tablet
- Internet access does not required
- Classes by senior faculties
- Validity: 2 Years
- Learn at your own pace
- Tablet is reusable for normal purpose after validity expires



Recorded Course

- Recorded Course
- Full fledged holistic preparation
- Classes by senior faculties
- Lectures can be watched anytime/anywhere
- Courses are accessible on PC & Mac desktops/laptops/android/iOS mobile devices.
- Learn at your own pace
- Validity: 1 year
- Internet connection required

Teaching Hours

- ✓ **GATE Exclusive** • CE, ME, EE : 800 to 900 Hrs.
• EC, IN, CS, CH : 650-700 Hrs.
- ✓ **GATE + ESE** • CE, ME, EE, EC : 1100 to 1200 Hrs.
- ✓ **GATE + SES-GS** • CE, ME, EE : 1150 to 1250 Hrs. ✓ **GATE + ESE + SES-GS** • CE, ME, EE, EC : 1450 to 1550 Hrs.
• EC, IN, CS, CH : 950-1050 Hrs.

Note : State Engineering Services Examination. • The course is offered with a validity options of 1 year and 2 years.

Low Cost EMI Facility Available

Admissions open



Scan to enroll

Delhi Centre : 44-A/1, Kalu Sarai, Near Hauz Khas Metro Station, New Delhi-110016 • Ph: 9021300500

MADE EASY Centres : Delhi | Bhopal | Hyderabad | Jaipur | Pune

www.madeeasy.in

Q.32 To obtain undisturbed clay soil sample, an Area Ratio of 10 % needs to be achieved for a thin walled sampling tube. If the outer diameter of the tube is 50.8 mm, the inner diameter (in mm) is _____ (rounded off to one decimal place).

Ans. (48.4)(48.2 to 48.6)

$$\text{Area ratio} = \frac{D_2^2 - D_1^2}{D_1^2} \times 100$$

$$\Rightarrow 10 = \frac{50.8^2 - D_1^2}{D_1^2} \times 100$$

$$\Rightarrow D_1 = 48.436 \text{ mm} \simeq 48.4 \text{ mm}$$

End of Solution

Q.33 The travel times of three vehicles on a 2 km stretch of road are 4, 5, and 8 minutes. Assuming the speed of each vehicle to be constant in this stretch, the Space Mean Speed (in km/h) of the vehicles is _____ (rounded off to two decimal places).

Ans. (21.2)(20.0 to 21.9)

Given: 3 vehicles

$$V_1 = \frac{\text{distance}}{\text{time}} = \frac{2}{4} \text{ km/min} = 30 \text{ kmph}$$

$$V_2 = \frac{2}{5} \times 60 = 24 \text{ kmph}$$

$$V_3 = \frac{2}{8} \times 60 = 15 \text{ kmph}$$

$$\begin{aligned} \text{Space mean speed} &= \frac{n}{\frac{1}{V_1} + \frac{1}{V_2} + \frac{1}{V_3}} = \frac{3}{\frac{1}{30} + \frac{1}{24} + \frac{1}{15}} \\ &= 21.176 \text{ kmph} \simeq 21.2 \text{ kmph} \end{aligned}$$

End of Solution

Q.34 A 30 m long tape is standardized at 25°C. It was used to measure the length of a line which came out to be 200 m. The temperature during the measurement was 35°C. The coefficient of expansion of the tape was 11×10^{-6} per °C. The correction in the measured length (in mm) due to change in temperature is _____ (in integer).

Ans. (22)(22 to 22)

Given:

$$T_0 = 25^\circ\text{C}, T_m = 35^\circ\text{C}$$

$$l_0 = 200 \text{ m}, \alpha = 11 \times 10^{-6} / ^\circ\text{C}$$

$$\text{Temperature correction, } C_T = l_0 \alpha (T_m - T_0)$$

$$= 200 \times 11 \times 10^{-6} \times 10$$

$$C_T = 0.022 \text{ m} = 22 \text{ mm}$$

End of Solution

Q.35 The height of the plane of collimation of a levelling instrument is 100.000 m from a datum. The levelling instrument measures a Back Sight of 1.500 m on a vertically held staff at a ground point P. The reduced level (in m) of the ground point P with respect to the datum is _____ (rounded off to three decimal places).

Ans. (98.5)(98.5 to 98.5)

Given: Level of line = 100 m (above datum)

B.S reading = 1.5 m

∴ Reduced level of P = 100 – 1.5 = 98.5 m

End of Solution

Q.36 Let $f(x)$ be a continuous function defined in $[0,2] \rightarrow \mathbb{R}$. and satisfying the equation

$$\int_0^2 f(x)[x - f(x)] dx = \frac{2}{3}.$$

The value of $f(1)$ is

(a) 1

(b) 2

(c) $\frac{1}{2}$

(d) 0

Ans. (c)

$$\int_0^2 f(x)[x - f(x)] dx = \frac{2}{3}$$

$$\int_0^2 [xf(x) - f(x)^2] dx$$

$$\int_0^2 \left[\frac{x^2}{4} - \left(\frac{x}{2} - f(x) \right)^2 \right] dx = \frac{2}{3}$$

$$\int_0^2 \frac{x^2}{4} dx - \int_0^2 \left(\frac{x}{2} - f(x) \right)^2 dx = \frac{2}{3}$$

$$\left[\frac{x^3}{3 \times 4} \right]_0^2 - \int_0^2 \left[\frac{x}{2} - f(x) \right]^2 dx = \frac{2}{3}$$

$$\frac{2}{3} - \int_0^2 \left[\frac{x}{2} - f(x) \right]^2 dx = \frac{2}{3}$$

$$\int_0^2 \left(\frac{x}{2} - f(x) \right)^2 dx = 0$$

$x = [0, 2]$

$$f(x) - \frac{x}{2} = 0$$

$$f(x) = \frac{x}{2}$$

at $x = 1$, $f(1) = \frac{1}{2}$

End of Solution

Q.37 An ordinary differential equation is given below.

$$x^2 \frac{d^2 y}{dx^2} = 6y$$

Considering a and b as arbitrary constants, the general solution of the equation is

- (a) $y(x) = ax^3 + \frac{b}{x^2}$ (b) $y(x) = ax^2 + \frac{b}{x^3}$
 (c) $y(x) = ax^2 + b \ln x$ (d) $y(x) = ax^3 + b \ln x$

Ans. (a)

Given: Differential equation

$$x^2 \frac{d^2 y}{dx^2} - 6y = 0$$

Let $x = e^z$

$$x^2 D^2 y - 6y = 0$$

$$(x^2 D^2 - 6)y = 0$$

$$(D^2 - D - 6)y = 0$$

Auxiliary equation,

$$m^2 - m - 6 = 0$$

$$m = -2 \text{ and } 3$$


$$y = c_1 e^{-2z} + c_2 e^{3z}$$

$$y = c_1 e^{-2x} + c_2 e^{3x}$$

$$y = \frac{C_1}{x^2} + C_2 x^3$$

End of Solution

Q.38 A plane truss consists of two linearly elastic, homogeneous, identical members, namely PQ and QR. Both members have length (L), cross-sectional area (A), and modulus of elasticity (E). The members are inclined at 45° as shown in the figure. The truss has hinge supports at P and R. The translational degrees-of-freedom (u and v) are shown at joint Q.

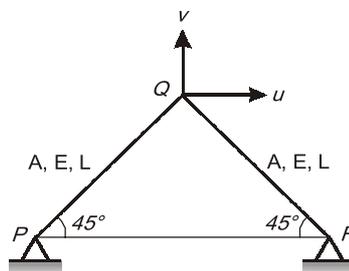

(Figure not to scale)

After application of the boundary conditions, the stiffness matrix of the truss becomes:

(a) $\frac{AE}{L} \begin{bmatrix} 1 & 1 \\ 1 & 1 \end{bmatrix}$

(b) $\frac{AE}{L} \begin{bmatrix} 1 & 1 \\ 1 & 1 \end{bmatrix}$

(c) $\frac{AE}{L} \begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix}$

(d) $\frac{AE}{L} \begin{bmatrix} 1 & -1 \\ -1 & 1 \end{bmatrix}$

Ans. (c)

Stiffness matrix, $[k] = \begin{bmatrix} k_{11} & k_{12} \\ k_{21} & k_{22} \end{bmatrix}$

Here, $k_{11} = \Sigma \left(\frac{AE}{L} \cos^2 \theta \right)$

$$k_{11} = \frac{AE}{L} (\cos^2 225^\circ + \cos^2 315^\circ) = \frac{AE}{L}$$

$$k_{22} = \Sigma \left(\frac{AE}{L} \sin^2 \theta \right)$$

$$k_{22} = \frac{AE}{L} (\sin^2 225^\circ + \sin^2 315^\circ) = \frac{AE}{L}$$


$$k_{12} = k_{21} = \Sigma \left(\frac{AE}{L} \cos \theta \sin \theta \right)$$

$$= \frac{AE}{L} (\cos 225^\circ \sin 225^\circ + \cos 315^\circ \sin 315^\circ) = 0$$

Stiffness matrix, $[k] = \frac{AE}{L} \begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix}$

End of Solution

Q.39 The plane frame has a hinge and a roller support, and is loaded as shown in the figure. Both the columns have same height.

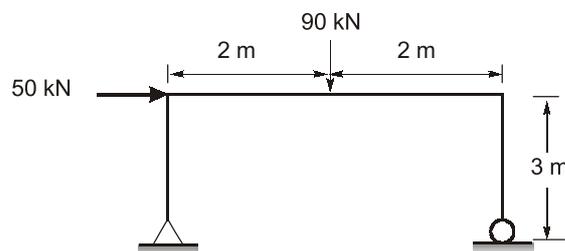


(Figure not to scale)

What is the absolute value of the maximum bending moment (in kN-m) in the frame?

- (a) 165 (b) 150
(c) 240 (d) 195

Ans. (a)

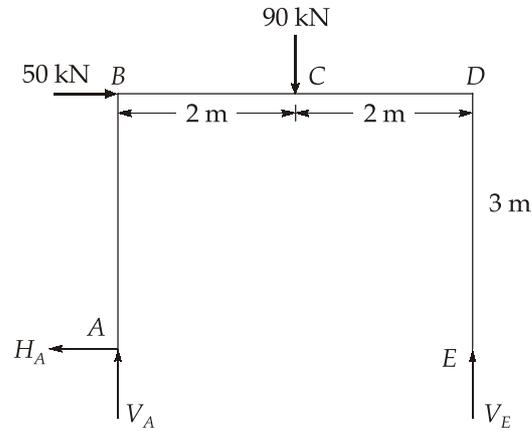

$$\Sigma F_x = 0 \Rightarrow H_A = 50 \text{ kN } (\leftarrow)$$

$$\Sigma F_y = 0 \Rightarrow V_A + V_E = 90 \text{ kN}$$

Taking moment about A,

$$\Sigma M_A = 0$$

$$\Rightarrow 50 \times 3 + 90 \times 2 - V_E \times 4 = 0$$

$$V_E = 82.5 \text{ kN } (\uparrow)$$

$$V_A = 7.5 \text{ kN } (\uparrow)$$

Maximum bending moment,

$$\begin{aligned} (M_{\max})_{\text{at } C} &= V_E \times 2 = 82.5 \times 2 \\ &= 165 \text{ kN-m} \end{aligned}$$

End of Solution

Q.40 For a hydraulic jump formed in a rectangular horizontal channel, the sequent depth ratio is 2. The Froude number of supercritical stream is

(a) $\sqrt{3}$

(b) $\sqrt{5}$

(c) $\sqrt{6}$

(d) $\sqrt{8}$

Ans. (a)

Given: $\frac{y_2}{y_1} = 2$

$$\therefore \frac{y_2}{y_1} = \frac{-1 + \sqrt{8F_r^2 + 1}}{2}$$

$$(2 \times 2 + 1)^2 = 1 + 8F_r^2$$

$$\Rightarrow F_r = \sqrt{3}$$

End of Solution




Conventional Questions Practice Programme for ESE Mains 2026



Scan to enroll

Offline **Live-Online**

- Batches Starting from 24 Feb, 2026
- Admissions Open

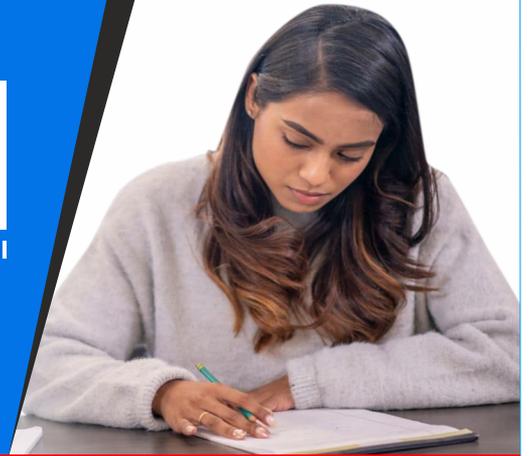

ESE Mains Test Series (15 tests) Starting from 15 March, 2026

Note : Solo Mains Test Series is also available.



Scan to enroll

This conventional course is offered in offline mode at Delhi Centre.

Key Features :

- Classes by MADE EASY senior faculties
- Beneficial to improve answer writing and presentation skills
- Updated Main exam workbooks containing diverse practice questions
- Highly useful for State Engineers Service examinations also.
- In-depth analysis and discussion on probable & potential questions
- Develops numerical questions solving techniques
- Weekly dynamic test series on every Sunday aligned with the course (optional).

Duration: 300-350 Hrs | **Streams:** CE, ME, EE, E&T

Fee Structure :

ESE Main Course Fees

- MADE EASY students : ₹13,000 + GST
- Non-MADE EASY students : ₹15,000 + GST

Main Course + Test Series Fee

- MADE EASY students : ₹16,500 + GST
- Non-MADE EASY students : ₹18,500 + GST

Test Series Fee

For all students : ₹4,500 + GST

Delhi Centre : 44-A/1, Kalu Sarai, Near Hauz Khas Metro Station, New Delhi-110016 • Ph: 9021300500

MADE EASY Centres : Delhi | Bhopal | Hyderabad | Jaipur | Pune

www.madeeasy.in

- Q.41** In a laminar flow of a Newtonian fluid through a circular pipe of radius 5 cm, the maximum velocity is found to be 2 m/s. The velocity (in m/s) at a radial distance of 2.50 cm from the axis of the pipe is
- (a) 1.00 (b) 1.25
 (c) 1.50 (d) 1.75

Ans. (c)

Given:

Maximum velocity, $u_{\max} = 2$ m/sec

Radius of pipe, $R = 5$ cm

Radial distance, $r = 2.5$ cm

For laminar flow, velocity at any radial distance 'r' is given by


$$u(r) = u_{\max} \left(1 - \frac{r^2}{R^2} \right)$$

at $r = 2.5$ cm

$$u(r = 2.5 \text{ cm}) = 2 \left[1 - \left(\frac{2.5}{5} \right)^2 \right] = 1.5 \text{ m/sec}$$

End of Solution

- Q.42** A road is divided into four sections having varying widths as shown in the figure. Section-2 (S2) represents a capacity constrained condition with respect to the traffic flow passing through Section-1 (S1). Section-3 (S3) and Section-4 (S4) do not face any such capacity constraint with respect to the flow. A flow-density relationship for unconstrained and constrained flow conditions is shown in the figure.

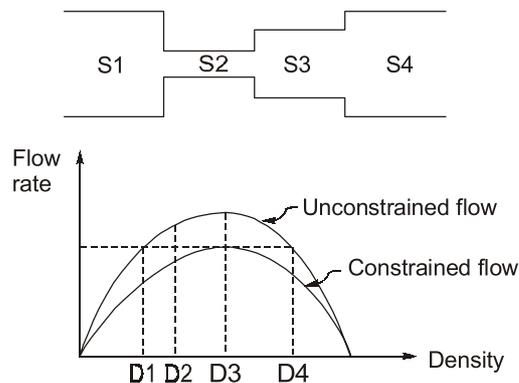

If Section-1 observes density D_2 , the option representing the correct state of density in Sections 2, 3 and 4 is:

- (a) S2 – D_4 ; S3 – D_3 ; S4 – D_2
 (b) S2 – D_3 ; S3 – D_2 ; S4 – D_1
 (c) S2 – D_3 ; S3 – D_4 ; S4 – D_2
 (d) S2 – D_4 ; S3 – D_3 ; S4 – D_1

Ans. (d)

From the graph and figure, we can infer that as section-2 is the most constrained, it will have the highest density i.e. it will correspond to D4 on the graph.

Similarly, section-3 corresponds to D3 on the graph as it will have slightly lower density and section -4 will correspond to D1.

End of Solution

Q.43 Locations P and Q are separated by a wide valley. The difference in levels of locations P and Q measured by a levelling instrument stationed near P is 3.0 m. The same instrument stationed near Q measures the difference in levels of locations P and Q as -1.0 m. Assume that the atmospheric refraction is same during the measurements. The true difference in levels (in m) of locations P and Q is

- (a) 1.0 (b) 1.5
 (c) 2.0 (d) 4.0

Ans. (a)

Given:

$$h_P - h_Q = 3 \text{ m}$$

$$h'_P - h'_Q = -1 \text{ m}$$

$$\therefore \Delta h = \frac{(h_P - h_Q) + (h'_P - h'_Q)}{2}$$

$$\Rightarrow \Delta h = \frac{3 + (-1)}{2} = 1 \text{ m}$$

End of Solution

Q.44 The average sewage from a city is 90 million litres per day and the average 5-day Biochemical Oxygen Demand (BOD_5) is 300 mg/l. Average standard BOD_5 of the domestic sewage is 0.08 kg/day/person. The population equivalent of the city is

- (a) 337500 (b) 216000
 (c) 270000 (d) 168750

Ans. (a)

Given: $Q = 90 \text{ MLD}$

$BOD_5 = 300 \text{ mg/l}$

Average per capita $BOD = 0.08 \text{ kg/day}$

$$\text{Population equivalent} = \frac{90 \times 10^6 \times 300 \times 10^{-6}}{0.08} = 337500$$

End of Solution

Q.45 Select ALL CORRECT option(s) which can be considered to check whether the flexural stresses in a prestressed concrete beam are within the allowable stresses at the transfer and the service stages.

- (a) Limiting zone for prestressing (b) Magnel's graph
(c) Hoyer effect (d) Load balancing method

Ans. (a, b)

Hoyer effect enhance bond strength of tendon and concrete. Nothing to do with flexure stress.

End of Solution

Q.46 As per the Rankine's earth pressure theory, which of the following statements is/are FALSE?

- (a) For the active earth pressure, the inclination of failure plane is $(45^\circ + \phi/2)$ with respect to the major principal plane.
(b) For the active earth pressure, the inclination of failure plane is $(45^\circ - \phi/2)$ with respect to the major principal plane.
(c) For the passive earth pressure, the inclination of failure plane is $(45^\circ + \phi/2)$ with respect to the major principal plane.
(d) For the passive earth pressure, the inclination of failure plane is $(45^\circ - \phi/2)$ with respect to the major principal plane.

Ans. (b, d)

For both active earth pressure as well as passive earth pressure, failure plane makes

$\left(45^\circ + \frac{\phi}{2}\right)$ with major principal plane.

End of Solution

Q.47 Which of the following statements is/are TRUE in the context of the geometric design of highways?

- (a) The coefficient of friction used for the design of horizontal curves is lower than the coefficient of friction used in the computation of the sight distances.
(b) Centrifugal force at horizontal curve is counteracted by raising the middle of the pavement with respect to the edges.
(c) Grade compensation is achieved by increasing the gradient of the horizontal curve.
(d) Under identical conditions, the design length of the summit curve of a road having unidirectional flow will be greater than that of the same road having bidirectional flow.

Ans. (a)

The value of friction is taken lower for horizontal alignment calculation as compared to sight distance.

End of Solution

- Q.48** Starting with the first approximation as $x = 0.5$, the second approximation for the root of the following function by the Newton-Raphson method is _____ (rounded off to two decimal places)

$$f(x) = e^{-x} - x$$

Ans. (0.57)(0.55 to 0.58)

$$f(x) = e^{-x} - x$$

$$x_0 = 0.5$$

$$x_1 = ?$$

by N.R. method,

$$f_x = e^{-x} - x$$

$$f'(x) = -e^{-x} - 1$$

$$x_1 = x_0 - \frac{f(x_0)}{f'(x_0)}$$

$$\Rightarrow x_1 = 0.5 - \frac{(e^{-0.5} - 0.5)}{-e^{-0.5} - 1}$$

$$\Rightarrow x_1 = 0.5 - \frac{[0.6065 - 0.5]}{-[0.6065 + 1]} = 0.56631 \simeq 0.57$$

End of Solution

- Q.49** Values of y for different values of x are tabulated below.
If a second-degree interpolating polynomial $P_2(x)$ is used to represent y , the value of $P_2(0)$ is _____ (rounded off to the nearest integer).

Ans. (2)(2 to 2)

-2	1	2
28	4	16

2nd degree polynomial

Since it is not equally spaced,

So we can apply lagrange's interpolation,

x_0	x_1	x_2
↑	↑	↑
-2	1	2
28	4	16
↓	↓	↓
y_0	y_1	y_2

$$f(x) = \frac{(x-x_1)(x-x_2)}{(x_0-x_1)(x_0-x_2)}y_0 + \frac{(x-x_0)(x-x_2)}{(x_1-x_0)(x_1-x_2)}y_1 + \frac{(x-x_0)(x-x_1)}{(x_2-x_0)(x_2-x_1)}y_2$$

$$f(x) = \frac{(0-1)(0-2)}{(-2-1)(-2-2)}28 + \frac{(0+2)(0-2)}{(1+2)(1-2)}4 + \frac{(0+2)(0-1)}{(2+2)(2-1)} \times 16$$


$$\Rightarrow f(0) = \frac{2}{3 \times 4} \times 28 + \frac{2x-2}{3x-1} \times 4 + \frac{2x-1}{4 \times 1} \times 16$$

$$\Rightarrow f(0) = \frac{14}{3} + \frac{16}{3} - 8$$


$$\Rightarrow f(0) = \frac{30-24}{3} = \frac{6}{3} = 2$$

End of Solution

- Q.50** Two identical blocks A and B are connected by a rigid rod. The blocks rest against vertical and horizontal planes, as shown in the figure. The coefficient of static friction at the vertical and horizontal planes is the same. If the sliding impends when $\theta = 45^\circ$, the value of the coefficient of static friction is _____ (rounded off to two decimal places).

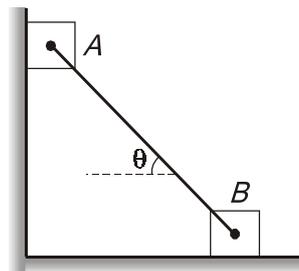


Ans. (0.41)(0.39 to 0.44)

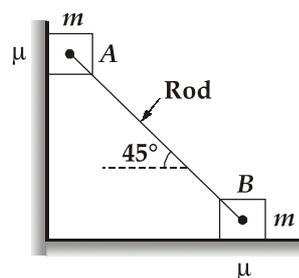

Block A (F.B.D.)

For equilibrium: $T \cos 45^\circ = N_A$

$$N_A = \frac{T}{\sqrt{2}}$$



$$T \sin 45^\circ + \mu N_A = mg$$


$$\frac{T}{\sqrt{2}} + \mu N_A = mg$$

$$\frac{T}{\sqrt{2}} + \mu \frac{T}{\sqrt{2}} = mg$$

$$\frac{T}{\sqrt{2}} (1 + \mu) = mg$$

...(i)

Block B (F.B.D.)

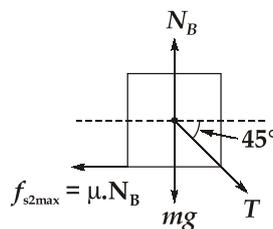

For equilibrium: $T \cos 45^\circ = F_{s2max} = \mu \cdot N_B$

$$N_B = mg + T \sin 45^\circ = \left(mg + \frac{T}{\sqrt{2}} \right)$$

$$T \cos 45^\circ = \frac{T}{\sqrt{2}} = \mu \left(mg + \frac{T}{\sqrt{2}} \right)$$

...(ii)

By equation (i) and (ii):

$$\frac{mg}{1+\mu} = \mu \left(mg + \frac{mg}{1+\mu} \right)$$

$$\frac{mg}{1+\mu} = \mu \left(\frac{mg(1+\mu) + mg}{1+\mu} \right)$$

$$1 = \mu [1 + \mu + 1]$$

$$1 = \mu (2 + \mu)$$

$$\mu^2 + 2\mu - 1 = 0$$

$$\mu = \frac{-2 \pm \sqrt{4+4}}{2} = \frac{-2 \pm \sqrt{8}}{2}$$

Since, μ can not be negative we shall take (+ve) sign.

$$\mu = \frac{-2 + \sqrt{8}}{2} = 0.414$$

$$\mu = 0.414$$

End of Solution



POSTAL PACKAGES

- CSE
- ESE
- GATE
- PSUs
- SSC-JE
- RRB-JE
- UPPSC-AE
- BPSC-AE
- MPSC
- Other State Engineering Exams

Salient Features of Postal Study Package

Our Postal Book Packages cater to the needs of college-going students, working professionals, and individuals unable to join classroom courses. These books, offered by MADE EASY, are designed to be compact, comprehensive, and easily understandable. We have put our efforts to ensure error-free content, incorporating smart and shortcut techniques specifically tailored for solving numerical problems.

- Complete syllabus coverage aligned with latest pattern/syllabus.
- Detailed theory and practice exercises.
- Latest and updated study material
- Step by step solutions
- Ample no. of practice questions with PYQs.
- Emphasis on technical and non technical sections both.
- Subject-wise theory objective and conventional practice sets.
- Proven track record of student success.

For online purchase, visit :

www.madeeasypublications.org | Helpline : 8860378004

For offline purchase, visit in-person at any MADE EASY center.
Books will be sent to your provided address.




Scan to enroll

Address : 44-A/4, Kalu Sarai, Near Hauz Khas Metro Station, New Delhi-110016

9021300500

www.madeeasypublications.org

- Q.51** A homogenous, linearly elastic rod AB is connected to a linearly elastic spring BC in between the fixed supports at A and C, as shown in the figure. The cross-sectional area, modulus of elasticity, and the coefficient of thermal expansion of the rod AB are 500 mm^2 , $60 \times 10^3 \text{ MPa}$, and $12 \times 10^{-6} \text{ per } ^\circ\text{C}$, respectively. The stiffness (k) of spring BC is 2500 N/mm .

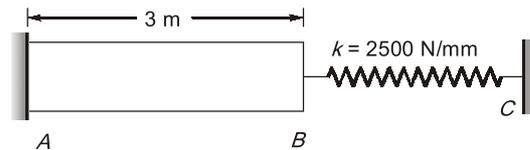

(Figure not to scale)

The internal force (in kN) that will develop in the spring BC when the temperature of rod AB is increased by 100°C is _____ (rounded off to one decimal place).

Ans. (7.2)(7.0 to 7.4)

Given:

$$\alpha = 12 \times 10^{-6}/^\circ\text{C}$$

$$E = 60 \times 10^3 \text{ MPa}$$


$$\Delta T = 100^\circ\text{C}$$

$$L = 3 \text{ m}$$

$$A = 500 \text{ mm}^2$$

$$k = 2500 \text{ N/mm}$$

Since the system is fixed, net deflection will be zero.

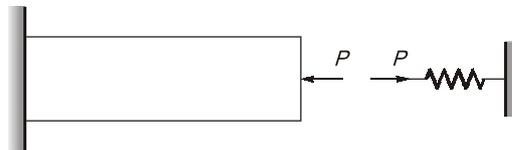

$$\therefore \left[L\alpha\Delta T + \left(\frac{-PL}{AE} \right) \right] + \left[\frac{-P}{k} \right] = 0$$


$$\Rightarrow 3000 \times 12 \times 10^{-6} \times 100 - \frac{P \times 3000}{500 \times 60 \times 10^3} - \frac{P}{2500} = 0$$

$$\Rightarrow 3.6 = P(5 \times 10^{-4})$$

$$\Rightarrow P = 7200 \text{ N} = 7.2 \text{ kN}$$

End of Solution


Q.52 The cross-section of a steel T-beam is shown in the figure where all dimensions are in mm.

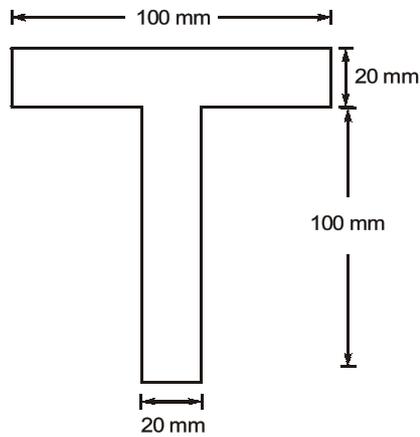

(Figure not to scale)

The plastic section modulus of the given cross-section is _____ $\times 10^4$ mm³ (in integer).

Ans. (12)(12 to 12)

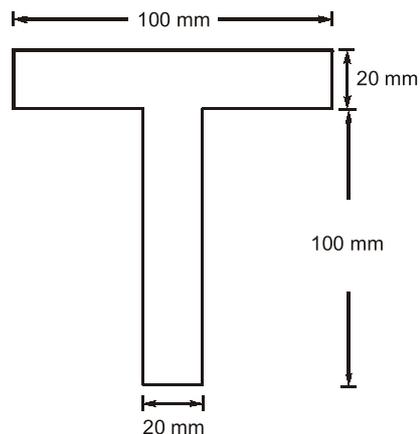

Plastic section modulus,

$$Z_p = \frac{A}{2}(\bar{y}_c + \bar{y}_t)$$

Here,

$$A = 2(100 \times 20) = 4000 \text{ mm}^2$$

$$\bar{y}_c = \frac{20}{2} = 10 \text{ mm}$$


$$\bar{y}_t = \frac{100}{2} = 50 \text{ mm}$$

$$\therefore Z_p = \frac{4000}{2}(10 + 50) = 12 \times 10^4 \text{ mm}^3$$

End of Solution

Q.53 A fully-penetrating well of 20 cm diameter is provided in an unconfined aquifer. The height of the ground water table is 30 m from the bottom of the aquifer. After a long period of pumping at a rate of $63 \text{ m}^3/\text{s}$, the drawdown in the observation wells at 10 m and 100 m from the pumped well is 12 m and 11 m, respectively. The transmissibility (in m^2/s) of the aquifer is _____ (rounded off to one decimal place).

Ans. (37.4)(35 to 40)

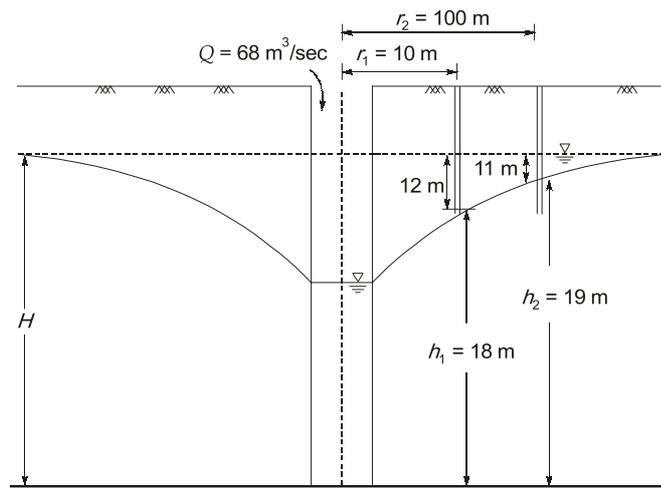

Given,

$$S_1 = 11 \text{ m}$$

$$h_1 = 30 - 11 = 19 \text{ m}$$

$$S_2 = 12 \text{ m}$$

$$h_2 = 30 - 12 = 18 \text{ m}$$

$$\therefore Q = \frac{\pi k (h_1^2 - h_2^2)}{\ln\left(\frac{r_2}{r_1}\right)}$$

$$r_2 = 100 \text{ m}, r_1 = 10 \text{ m}$$

$$\therefore k = \frac{68 \times \ln\left(\frac{100}{10}\right)}{\pi \times 63 \times (19^2 - 18^2)} = 1.248 \text{ m/s}$$

$$\therefore T = kB = 1.248 \times 30 = 37.44 \text{ m}^2/\text{sec}$$

End of Solution

Q.54 A wide unlined channel carries sediment-free water. The depth of water is 1 m. The specific weight of water is 10 kN/m^3 . To prevent scouring, the maximum permissible tractive stress on bed is 10 N/m^2 . The maximum slope of the channel bed to prevent scouring is 1 in n . The value of n is _____ (in integer).

Ans. (1000)(1000 to 1000)

$$\text{Critical shear stress, } \tau_0 = \gamma_w R S_0$$

$$\Rightarrow 10 \text{ N/m}^2 = 10 \times 10^3 \text{ N/m}^3 \times 1 \times \frac{1}{n}$$

$$\Rightarrow \frac{1}{n} = \frac{1}{10^3}$$

$$n = 1000$$

End of Solution

Q.55 A bridge with an expected life of 50 years is designed for a flood of $10000 \text{ m}^3/\text{s}$ corresponding to the return period of 100 years. The risk associated with this design is _____ (rounded off to two decimal places).

Ans. (0.39)(0.38 to 0.41)

$$n = 50 \text{ year}$$

$$T = 100 \text{ year}$$

$$\text{Risk} = 1 - q^n = 1 - \left(1 - \frac{1}{T}\right)^n$$

$$= 1 - \left(1 - \frac{1}{100}\right)^{50} = 0.39$$

End of Solution

Q.56 An infinite slope with slope angle $\beta = 22^\circ$ consists of soil with the following properties:
Unit weight $\gamma = 15.72 \text{ kN/m}^3$
Cohesion $c' = 12 \text{ kPa}$
Angle of internal friction $\phi' = 15^\circ$
The critical height of the slope (in m) is _____ (rounded off to two decimal places).

Ans. (6.53)(6.4 to 6.8)

$$\text{FOS} = \frac{\text{Shear strength}}{\text{Mobilised shear stress}} = \frac{C + \gamma H \cos^2 \beta \tan \phi}{\gamma H \cos \beta \sin \beta}$$

$$1 = \frac{12 + 15.72 \times H_c \cos^2 22^\circ \tan 15^\circ}{15.72 \times H_c \cos 22^\circ \times \sin 22^\circ}$$

$$H_c = 6.525 \text{ m} \approx 6.53 \text{ m}$$

End of Solution

Q.57 A circular pile of 600 mm diameter and 6 m length is embedded in a saturated clayey soil. Undrained cohesion of the soil is 80 kPa. Unit weight of the soil is 19.20 kN/m³. The adhesion factor is 0.54. If the diameter of the pile is doubled to 1200 mm (keeping the length constant), the ratio of pile capacity of 1200 mm diameter pile to that of 600 mm diameter pile is _____ (rounded off to two decimal places).

Ans. (2.56)(2.50 to 2.65)

Given:

$$d_1 = 600 \text{ mm}$$

$$l = 6 \text{ m}$$

$$c = 80 \text{ kN/m}^2$$

$$\gamma = 19.20 \text{ kN/m}^3$$

$$\alpha = 0.54$$

$$d_2 = 1200 \text{ mm}$$

Pile capacity, $Q_u = 9CA_b + \alpha \bar{C}A_s$

$$\begin{aligned} \text{Now, } \frac{Q_{u2}}{Q_{u1}} &= \frac{9C \times \frac{\pi}{4} d_2^2 + 0.54 C \pi d_2 l}{9C \frac{\pi}{4} d_1^2 + 0.54 C \pi d_1 l} \\ &= \frac{1200\pi C \left(9 \times \frac{1}{4} \times 1200 + 0.54 \times 6000 \right)}{600\pi C \left(9 \times \frac{1}{4} \times 600 + 0.54 \times 6000 \right)} \\ &= \frac{2(5940)}{(4590)} = 2.588 \approx 2.56 \end{aligned}$$

End of Solution

Q.58 A group of 25 circular piles is arranged in 5 × 5 uniform pattern in a soft clay soil with equal spacing in both the directions. These are friction piles with negligible end bearing. Consider the following details:

Diameter of each pile = 1 m

Length of each pile = 15 m


Cohesion of the soil = 20 kN/m²

Unit weight of the soil = 16 kN/m³

Adhesion factor = 0.75

Considering the efficiency of the pile group as unity, the optimum value of the ratio of the pile spacing to pile diameter is _____ (rounded off to one decimal place).

Ans. (3.4)(3.2 to 3.6)

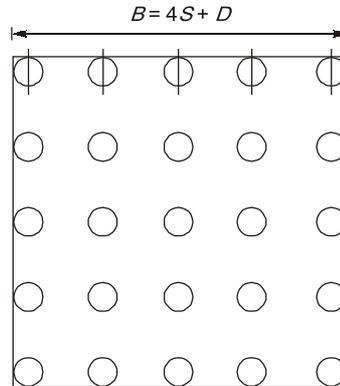

$$\eta = \frac{\text{Pile group capacity}}{\text{No. of pile} \times \text{Single pile capacity}}$$

Individual pile capacity, $Q_u = \alpha C A_s$ [∵ Friction piles]
 $= 0.75 \times 20\pi \times 1 \times 15 = 706.85$

Pile group = $1 \times 20 \times 4B \times 15$

As efficiency of pile group = 1,

$$\Rightarrow 1200B = 25 \times 706.85$$

$$1200 \times (4S + 1) = 25 \times 706.85$$

$$S = 3.43 \text{ m}$$

Ratio of pile spacing to pile diameter = 3.43 m

End of Solution

Q.59 A shallow strip footing of width 2 m is embedded at a depth of 1.5 m below the ground surface in a homogeneous pure clay with an angle of internal friction zero. Consider unit weight of soil as 20 kN/m³ and undrained cohesion of soil as 20 kN/m².

Due to rise of ground water table from far below the founding depth to the ground surface in monsoon season, the magnitude of percentage change in the net ultimate bearing capacity as per Terzaghi's theory is _____ (rounded off to two decimal places).

Ans. (0)(0 to 0)

For clayey soil, $q_{nu} = CN_c$


As independent of water table so change in net bearing capacity = 0

End of Solution

Q.60 Traffic is moving on a 6-lane dual carriageway road. Traffic volume per direction during peak hour (08:00 am to 09:00 am) is 6000 veh/h. It is assumed that the traffic is distributed uniformly across the lanes in each direction. Just at 08:00 am, a truck goes out of order on the middle lane of one side, thus disrupting the traffic on that lane in one direction. The lane capacity under normal conditions is 2000 veh/h/lane and under queue formation it is 1600 veh/h/lane. The traffic resumes at 08:30 am on removing the truck from the middle lane. Hourly traffic volume after 09:00 am reduces to 5000 veh/h/dir.

The number of vehicles in the queue at 10:00 am is _____ (in integer).

Ans. (2200)(2200 to 2200)

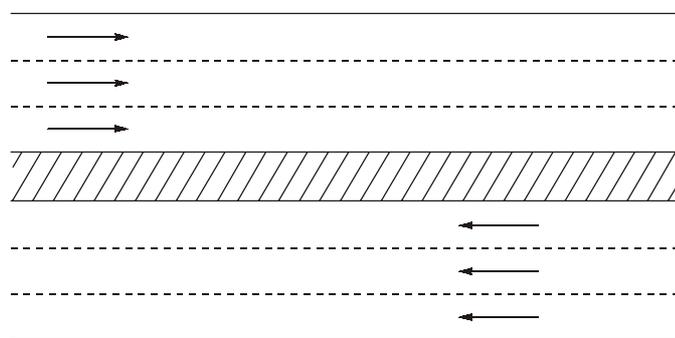

6-lane dual carriageway road

Now, Traffic under normal conditions = 2000 veh/hr/lane
 and Queue discharge capacity = 1600 veh/hr/lane

From 8 am – 9 am,

Traffic volume per direction = 6000 veh/hr
 Traffic volume per lane = 2000 veh/hr/lane

I. From 8 am – 8:30 am:

1 lane is blocked, so only 2 lanes will be available.

Arrival rate = 6000 veh/hr

Queue discharge capacity per lane = 1600 veh/hr

Total service rate in this duration = $2 \times 1600 = 3200$ veh/hr

Queue growth rate = $6000 - 3200 = 2800$ veh/hr

Duration of this growth rate = 30 min = 0.5 hr

Queue formed in this duration = $0.5 \times 2800 = 1400$ vehicles

II. From 8:30 am to 9 am:

Truck is removed from lane, so the lane is open but the queue still exists.

Discharge rate = 1600 veh/hr/lane

Total service rate in this duration = $3 \times 1600 = 4800$ veh/hr

Queue growth rate = $6000 - 4800 = 1200$ veh/hr

Duration of this growth rate = 30 min = 0.5 hr

Queue formed during this duration = $0.5 \times 1200 = 600$ veh

III. From 9 am to 10 am:

Arrival rate is reduced to 5000 veh/hr

Total service rate in this duration = $3 \times 1600 = 4800$ veh/hr

Queue growth rate = $5000 - 4800 = 200$ veh/hr

Duration = 1 hr

Queue formed = $1 \times 200 = 200$ vehicles

Total numbers of vehicles in queue will be,

Queue in I + Queue in II + Queue in III

$1400 + 1600 + 200 = 2200$ vehicles

End of Solution

Q.61 In a bituminous mix, the percentage by weight of coarse aggregate, fine aggregate, filler, and bituminous binder is 58, 25, 12, and 5, respectively. The corresponding specific gravity of these materials is 2.68, 2.45, 2.42, and 1.15. The bulk specific gravity of the mix is 2.2.

The Voids Filled with Bitumen (VFB, in percentage) is _____ (rounded off to the nearest integer).

Ans. (50)(48 to 52)

Given,

$$W_{CA} = 58\%, W_{FA} = 25\%, W_b = 5\%$$

$$W_{MA} = 12\%$$

\therefore

$$G_t = \frac{100}{\frac{W_{CA}}{G_{CA}} + \frac{W_{FA}}{G_{FA}} + \frac{W_b}{G_b} + \frac{W_{MA}}{G_{MA}}}$$

$$G_t = \frac{100}{\frac{58}{2.68} + \frac{25}{2.45} + \frac{5}{1.15} + \frac{12}{2.42}} = 2.43$$

$$G_m = 2.2$$

$$V_v(\%) = \left(\frac{G_t - G_m}{G_t} \right) \times 100 = \left(\frac{2.43 - 2.2}{2.2} \right) \times 100 = 9.465\%$$

$$V_v(\%) = 9.465\%$$

$$V_b(\%) = \frac{W_b}{G_b} \times G_m = \frac{5}{1.15} \times 2.2 \times 100 = 9.565\%$$

\therefore

$$VFB = \frac{V_b}{V_v + V_b} \times 100 = 50.26\%$$

End of Solution

MADE EASY students top in ESE 2025

4 Streams 4 Toppers
all 4 MADE EASY Students

39 selections
in Top 10

434 selections out of
458 Vacancies (95% Selections)

CE 9 in Top 10	1 AIR MOHAMMAD SHAQUIB Live Online Foundation Course	2 AIR PRAKHAR SHRI Classroom Foundation Course	3 AIR ARJUN SHARMA Mains Online Course	4 AIR BOLLA U NANDAN Classroom Foundation Course	5 AIR KESHAV Test Series & IGP	7 AIR TUSHAR AGGARWAL Classroom Foundation Course	8 AIR AYUSH JAIN Classroom Foundation Course	9 AIR ADITYA P SINGH Test Series & IGP	10 AIR PUSHPENDRA RATHORE Test Series & IGP	
ME 10 in Top 10	1 AIR NIMESH CHANDRA Classroom Foundation Course	2 AIR ASHOK KUMAR Classroom Foundation Course	3 AIR HARI SINGH Mains Online Course	4 AIR SIDDESH RAO GS Online Course	5 AIR GOLLANGI SATEESH Mains Online Course	6 AIR AVINASH VERMA Mains Online Course	7 AIR PRASHANT SINGH Mains Offline Course	8 AIR MONU KUMAR Classroom Foundation Course	9 AIR NIKHIL KUMAR SAHA Test Series & IGP	10 AIR AMIT KUMAR SINGH Classroom Foundation Course
EE 10 in Top 10	1 AIR RAJAN KUMAR Classroom Foundation Course	2 AIR VISHNU SAINI Live Online Foundation Course	3 AIR OMPRAKASH RAJPUT Classroom Foundation Course	4 AIR TUSHAR CHAUDHARY Classroom Foundation Course	5 AIR RAM KUMAR Test Series & IGP	6 AIR PUNIT MEENA Classroom Foundation Course	7 AIR JYOTI K. PANDA Classroom Foundation Course	8 AIR D A SAI RAM REDDY Test Series & IGP	9 AIR DHURUV KAWAT Classroom Foundation Course	10 AIR AKSHIT PARASHARI Live Online Foundation Course
E&T 10 in Top 10	1 AIR UTKARSH PATHAK Live Online Foundation Course	2 AIR RAJESH TIWARI Live Online Foundation Course	3 AIR PRASHANT LAVANIA Classroom Foundation Course	4 AIR PRADEEP SHUKLA Mains Online Course	5 AIR ASHISH SINGH PATEL Classroom Foundation Course	6 AIR TANYA TYAGI Mains Online Course	7 AIR PALAK MISHRA Mains Online Course	8 AIR HAYAT ALI Classroom Foundation Course	9 AIR VIDHU SHREE Live Online Foundation Course	10 AIR RAM PAL SINGH Classroom Foundation Course

MADE EASY students top in GATE 2025

5 All India Rank 1
(CE, ME, IN, ES & EE)

45 Selections
in Top 10

399 Selections
in Top 100

1 AIR CE Abhay Singh Classroom Course	1 AIR ME Rajneesh Bijarniya Classroom Course	1 AIR EE Pradip Chauhan Test Series	1 AIR IN Kailash Goyal Classroom Course	1 AIR ES Yash Jain Classroom Course	2 AIR CE Harshvardhan Singh Classroom Course	2 AIR ME Gollangi Sateesh Online Course	2 AIR EE Kailash Goyal Classroom Course	2 AIR EC Ankush Philip John Postal Package & Test Series	
2 AIR IN S. Bhattacharya Test Series	2 AIR ES Jitesh Choudhary Classroom Course	2 AIR ES Tarun Yadav Classroom Course	3 AIR CE Pankaj Meena Classroom Course	3 AIR ME Nimesh Chandra Classroom Course	3 AIR PI Aditya Kr. Prasad Classroom Course	3 AIR XE Rohan Kr. Biswal Test Series	5 AIR CE Kartik Pokhriyal Classroom Course		
5 AIR PI Kuldeep Singh Naruka Classroom Course	5 AIR IN Sachin Yadav Test Series	5 AIR EC M. M. Nafeez Test Series	5 AIR ES Sachin Kumar Classroom Course	6 AIR PI Kaushal Kr. Kaushik Online Course	6 AIR CE Shivnand Chaurasia Online Course	6 AIR CE Nimish Upadhyay Online Course	6 AIR EE Puneet Soni Test Series	6 AIR EE Shivam Kr. Gupta Test Series	
6 AIR EC Pentela J. Bhavani Test Series	6 AIR IN Utkarsh P. Patil Classroom Course	7 AIR PI Waleed Shaikh Test Series	7 AIR ME Abhinn Online Course	7 AIR IN Dev J. Patel Test Series	7 AIR ES Ankit Kumar Classroom Course	8 AIR ME Goutam Kumar Test Series	9 AIR CE Tarun Yadav Classroom Course	9 AIR CS Omhari Test Series	9 AIR EC Chilukuri S. Charan Test Series
9 AIR XE Apar Harsh Chandra Classroom Course	10 AIR CE Adnan Quasain Classroom Course	10 AIR CE Rahul Singh Online Course	10 AIR ME Ashutosh Kumar Classroom Course	10 AIR ME Jetti Ganateja Test Series	10 AIR ME Muhammed Sinan K Test Series	10 AIR ME Pitchika Kr. Vasu Online Course	10 AIR PI M Gopu Ganesh Test Series	10 AIR EE Neelava Mukherjee Postal Package & Test Series	

Course-wise details of "top 100 rank holders of GATE 2025" and "selected candidates of ESE 2025 from MADE EASY" are available on our website.

Delhi Centre : 44-A/1, Kalu Sarai, Near Hauz Khas Metro Station, New Delhi-110016 • Ph: 9021300500

MADE EASY Centres : Delhi | Bhopal | Hyderabad | Jaipur | Pune

www.madeeasy.in


Q.62 The following consecutive readings (in m) were taken with a dumpy level and a levelling staff at a common interval of 20 m:

0.385; 1.030; 1.925; 2.825; 3.730; 4.850; 1.045; 2.005; 3.330; 4.580

The dumpy level was shifted after taking the sixth reading.

The gradient (in %) of the ground between the first and the last location of the reading is _____ (in integer).

Ans. (5)(5 to 5)

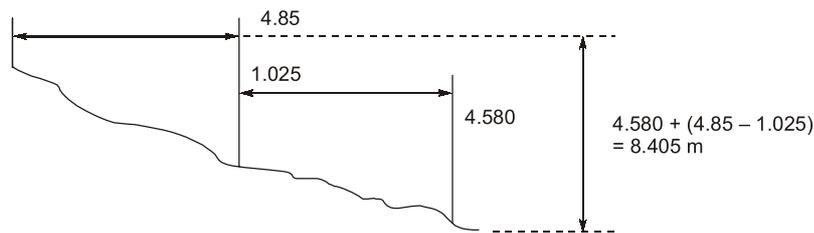

True vertical difference = 8.405 - 0.385 = 8.02 m

$$\therefore \text{gradient} = \frac{8.02}{20 \times 8} = \frac{8.02}{160} = 0.05 = 5\%$$

End of Solution

Q.63 An Activated Sludge Process (ASP) has an inlet wastewater flowrate of 20000 m³/day with a Biochemical Oxygen Demand (BOD) concentration of 250 mg/l. It produces treated wastewater containing 20 mg/l BOD. The aeration tank has a working volume of 6000 m³ and a biomass concentration of 3000 mg/l. Biological Sludge Residence Time (BSRT) of the system is 6 days. The influent wastewater and the treated effluent from the system have negligible concentrations of biomass. The sludge recycle line from the bottom of the Secondary Sedimentation Tank (SST) to the inlet of the aeration tank has a flowrate of 6000 m³/day.

To maintain equilibrium, the flowrate (in m³/day) of sludge that is to be wasted from the system is _____ (in integer).

Ans. (230)(230 to 250)

Given:

$$Q = 20000 \text{ m}^3/\text{d}$$

$$S_o = 250 \text{ mg/l}$$

$$S_e = 20 \text{ mg/l}$$

$$V = 6000 \text{ m}^3$$

$$X = 3000 \text{ mg/l}$$

$$\theta = 6 \text{ days}$$

$$X_e \approx 0$$

$$Q_R = 6000 \text{ m}^3/\text{d}$$

We know, $\frac{Q_R}{Q} = \frac{X}{X_u - X}$

$\Rightarrow \frac{6000}{20000} = \frac{3000}{X_u - 3000}$

$\Rightarrow X_u = 13000 \text{ mg/l}$

Also, $\theta = \frac{VX}{Q_w X_u}$

$\Rightarrow 6 = \frac{6000 \times 3000}{Q_w \times 13000}$

$\Rightarrow Q_w = 230.77 \text{ m}^3/\text{d} \approx 230 \text{ m}^3/\text{d}$

End of Solution

Q.64 The intensity-duration relationship for a rainfall on a rectangular plot ABCD of area 7 ha (1 ha = 10^4 m^2) can be modelled by the following equation:


$$I = \frac{25}{(t+10)}$$

where I is rainfall intensity (in cm/h), and t is the duration (in minutes) of rainfall. The average runoff coefficient over the area is 0.60. The time of entry (in minutes) to the outfall from the corners A, B, C, and D is 10, 20, 15 and 25, respectively.

The design flowrate (in m^3/h) of the storm-sewer at the outfall is _____ (in integer).

Ans. (300)(300 to 300)

Time of concentration is minimum time for which rational formula is applicable.

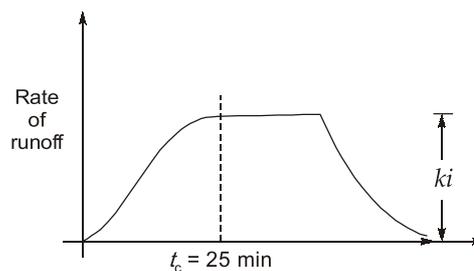

Rational formula, $Q_p = kiA$

Here, $i = \frac{25}{t+10} = \frac{25}{25+10} = \frac{25}{35} \text{ cm/hr}$

$\therefore Q_p = 0.6 \times \frac{25}{35} \times 10^{-2} \times 7 \times 10^4 = 300 \text{ m}^3/\text{hr}$

End of Solution

Q.65 The maximum demand at a water purification plant has been estimated as 12 million litres per day. For the raw supplies, a rectangular sedimentation tank is to be designed with mechanical sludge removal arrangement. Consider depth of the tank as 4 m, detention period as 6 hours, and velocity of flow as 0.003 m/s. The width (in m) of the detention tank is _____ (rounded off to two decimal places).

Ans. (11.57)(11 to 12)

Given: $Q = 12 \times 10^6 \text{ l/day} = 12 \times 10^3 \text{ m}^3/\text{day}$
 $H = 4 \text{ m}$
 $D_t = 6 \text{ hours}$
 $v = 0.003 \text{ m/s}$

We know, $D_t = \frac{V}{Q} = \frac{L}{v}$

Now, $D_t = \frac{V}{Q}$

$\Rightarrow \frac{6}{24} \text{ days} = \frac{V}{12 \times 10^3 \text{ m}^3/\text{day}}$

$\Rightarrow V = 3000 \text{ m}^3$

Now, $D_t = \frac{L}{v}$

$\Rightarrow 6 \times 3600 = \frac{L}{0.003 \text{ m/s}}$

$\Rightarrow L = 64.8 \text{ m}$

Now, $V = L \times B \times H$

$\Rightarrow 300 = 64.8 \times B \times 4$

$\Rightarrow B = 11.57 \text{ m}$

End of Solution

